




# BOLERO GII CCT






EN60598/CEM2001/108/CE


Power: 230V-50Hz  
IK08-IP20/IP44  
Temp: -20° C/+50° C  
Socked: LED-Platta  
Ligth source: LED 11W/20W  
PC Diffuser/Steel house




Note: Kelvin change switch is placed inside the luminaire, on the back of LED plate.  
Disconnect the power before operation.  
Settings are 3000K/3500K/4000K, factory setting is 3000K.




1

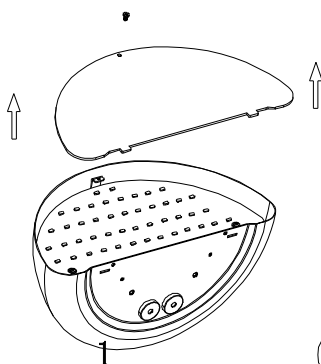


2




3

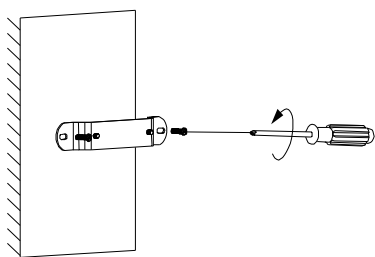


4

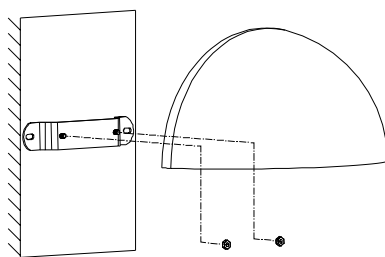


5




6




7

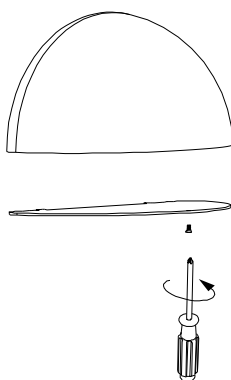

8



IP44



IP20

9



# BOLERO MIDI CCT



EN60598/CEM2001/108/CE

Power:230V-50Hz  
IK08-IP20/IP44  
Temp:-20° C/+50° C  
Socked:LED-Platta  
Ligth source:LED 11W/20W  
PC Diffuser/Steel house

| Bolero midi/maxi current setting |       |       |            |
|----------------------------------|-------|-------|------------|
| PIN 1                            | PIN 2 | PIN 3 | I out (mA) |
| ●                                | ●     | ●     | 500        |
| ○                                | ●     | ●     | 450        |
| ●                                | ○     | ●     | 400        |
| ○                                | ○     | ●     | 350        |
| ●                                | ●     | ○     | 300        |
| ○                                | ●     | ○     | 250        |
| ●                                | ○     | ○     | 200        |
| ○                                | ○     | ○     | 150        |

|       |                 | Bolero Midi |            | Bolero Maxi |            |
|-------|-----------------|-------------|------------|-------------|------------|
| CCT   | Current Setting | Power (W)   | Lumen (lm) | Power (W)   | Lumen (lm) |
| 3000K | 150mA           | 5.5         | 493        | 7.6         | 753        |
|       | 200mA           | 6.9         | 636        | 9.8         | 983        |
|       | 250mA           | 8.5         | 779        | 12.4        | 1234       |
|       | 300mA           | 10.2        | 917        | 14.5        | 1434       |
|       | 350mA           | 11.6        | 1040       | 17.3        | 1671       |
|       | 400mA           | 13.1        | 1157       | 19.5        | 1867       |
|       | 450mA           | 14.9        | 1286       | 22.3        | 2078       |
|       | 500mA           | 16.3        | 1379       | 24.7        | 2246       |

|       |                 | Bolero Midi |            | Bolero Maxi |            |
|-------|-----------------|-------------|------------|-------------|------------|
| CCT   | Current Setting | Power (W)   | Lumen (lm) | Power (W)   | Lumen (lm) |
| 3500K | 150mA           | 5.4         | 521        | 7.3         | 812        |
|       | 200mA           | 6.9         | 680        | 9.5         | 1082       |
|       | 250mA           | 8.4         | 839        | 11.9        | 1373       |
|       | 300mA           | 9.9         | 991        | 14.1        | 1613       |
|       | 350mA           | 11.3        | 1140       | 16.6        | 1890       |
|       | 400mA           | 12.8        | 1278       | 18.7        | 2113       |
|       | 450mA           | 14.3        | 1419       | 21.3        | 2374       |
|       | 500mA           | 15.8        | 1555       | 23.5        | 2585       |

|       |                 | Bolero Midi |            | Bolero Maxi |            |
|-------|-----------------|-------------|------------|-------------|------------|
| CCT   | Current Setting | Power (W)   | Lumen (lm) | Power (W)   | Lumen (lm) |
| 4000K | 150mA           | 5.4         | 527        | 7.6         | 853        |
|       | 200mA           | 7           | 691        | 9.7         | 1107       |
|       | 250mA           | 8.5         | 846        | 12.2        | 1389       |
|       | 300mA           | 10          | 987        | 14.3        | 1611       |
|       | 350mA           | 11.6        | 1126       | 17          | 1876       |
|       | 400mA           | 13.1        | 1255       | 19.2        | 2083       |
|       | 450mA           | 14.8        | 1387       | 22          | 2317       |
|       | 500mA           | 16.4        | 1498       | 24.2        | 2504       |