

NVC UK - NVC Lighting Limited
NVC Park 201, Hollymoor Way, Rubery,
Birmingham, B31 5HE
T +44 (0)121 457 6340
E sales@nvcuk.com

NVC NORDICS - NVC Lighting AB
Albybergsringen 3b 137 69 Österhaninge
T +46(0)8 735 55 40
Sweden info@nvc-lighting.se
Finland info@nvc-lighting.fi
Denmark info@nvc-lighting.dk



DATASHEET

ATLANTA

Atlanta 10-14-18W LED White 450mm Corridor Function PIR
830-835-840

IP44 Decorative LED Bulkhead
PC Construction And PC Opal Diffuser
Easy To Install





GENERAL INFORMATION	
Product Code	NAT/10-14-18/WH/CFPIR/830-35-40
Product Range	Amenity
Product Category	Amenity
IP Rating	44
IK Rating	08
Warranty	5 Years Unlimited
DIMENSION/WEIGHT	
Dimensions Circular (DIA x H) (mm)	DIA=Ø450, H=78
Dimensions Square/Rectangular (L x W x H) (mm)	L=0, W=0, H=0
Cut-out Size (mm)	0
Product Weight (Kg)	N/A
CONSTRUCTION	
Body Material	PC
Body Colour	White
Optical Material	N/A
Optical Finish	N/A
Termination	4x2x2.5mm sq. Push In Terminal
Driver - Integral or Remote	Integral
PACKAGING	
Carton Dimensions (mm)	N/A
Quantity per Outer Carton	N/A
Total Weight incl. Carton (Kg)	N/A

LUMINAIRE PERFORMANCE	
Energy Rating	D
Luminaire Lumens (lm)	1320 / 1849 / 2378
Power Consumption (W)	8 / 14 / 18
LED Lumens (lm/W)	N/A
Efficacy (l.m/c.W)	132 / 132 / 132
Operating Temp. (Min/Max)	-20°C to 25°C to
LIGHT SOURCE	
Type	LED
Correlated Colour Temp.	3000 - 3500 - 4000
Colour Rendering Index (CRI)	>80
Lumen Depreciation	L80 100000
SDCM	<3
ELECTRICAL INPUT	
VOLTAGE (V)	220-240V AC
Operating Frequency	50/60Hz
In Rush	N/A
Drivers per MCB*	N/A
Class	Class 1
Power Factor	N/A
Cable Entry	Back
ELECTRICAL OUTPUT	
Forward Current (mA)	N/A
Forward Voltage (Vf)	N/A
EMERGENCY DATA	
Mode of Operation	N/A
Battery Duration	N/A
Battery Type	N/A
Battery Specification	N/A
Emergency Lumens	N/A
DIMMING	
DALI	N/A
OTHER	N/A
Switch Dim	N/A
Corridor Function	Yes
SENSORS	
Microwave	N/A
PIR	Yes
STANDARDS/APPROVALS	
CE Marked	Yes
Certificate of Conformity	Yes
Accreditations	N/A
BARCODE	
EAN NUMBER	5056673216441

* GUIDE ONLY

PIR 9-14-18 = 75
PIR 16-20-24 = 82

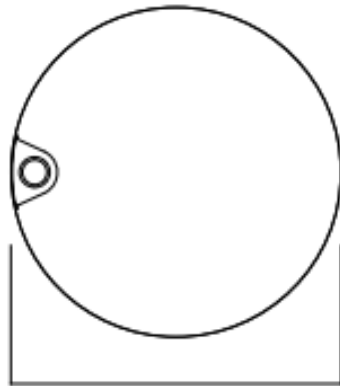

PIR 9-14-18 = 300
PIR 16-20-24 = 450

