



BESKRIVELSE

51F


Kuglehane med indbygget snavssamler - filter af typen FM28.

Muffe x muffe. Let at rengøre.

Afzinkningsfri messing. Blåt stålgreb.

I henhold til En 13828 standard.

DIMENSIONER

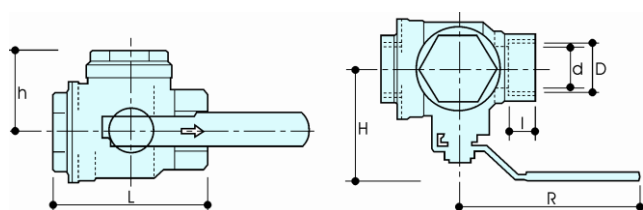

D"	1/2"	3/4"	1"	1"1/4	1"1/2	2"
d	18	20	28.5	35.5	45	56
H	50	50	66	82	89	120
h	37	37	51	60	74	90
I	15	16	21.5	23.5	23.5	28
L	69	69	95	111	127	154
R	95	95	120	150	150	200
Acc.	2	2	3	4	4	5
Gr.	445	450	1160	1850	2800	5400

Alle gevind er i overensstemmelse med ISO 7/1 eller ISO 228 standarder.

MATERIALER



VARIANTER

51F M x M, blåt stålgreb

GREBSVARIANTER


51F Blåt stålgreb
52F Blåt T-greb
53F Gearhåndtag

Ventilhus	CuZn36Pb2As Cw602N (DIN 50930 part.6)
Kugle	CuZn36Pb2As Cw602N (DIN 50930 part.6) Diamantslebet og krombelagt
Spindel	CuZn36Pb2As Cw602N (DIN 50930 part.6)
Pakdåse	CuZn39Pb3 Cw614N (DIN 50930 part.6) Justerbar
Omløber - forsegling	CuZn36Pb2As Cw602N (DIN 50930 part.6)
Pakninger	PTFE
O-rings	2 x Viton® PTFE forsegling
Lever	Galvaniseret stål. PVC med print.

Godkendelser




TRYKTABSDIAGRAM

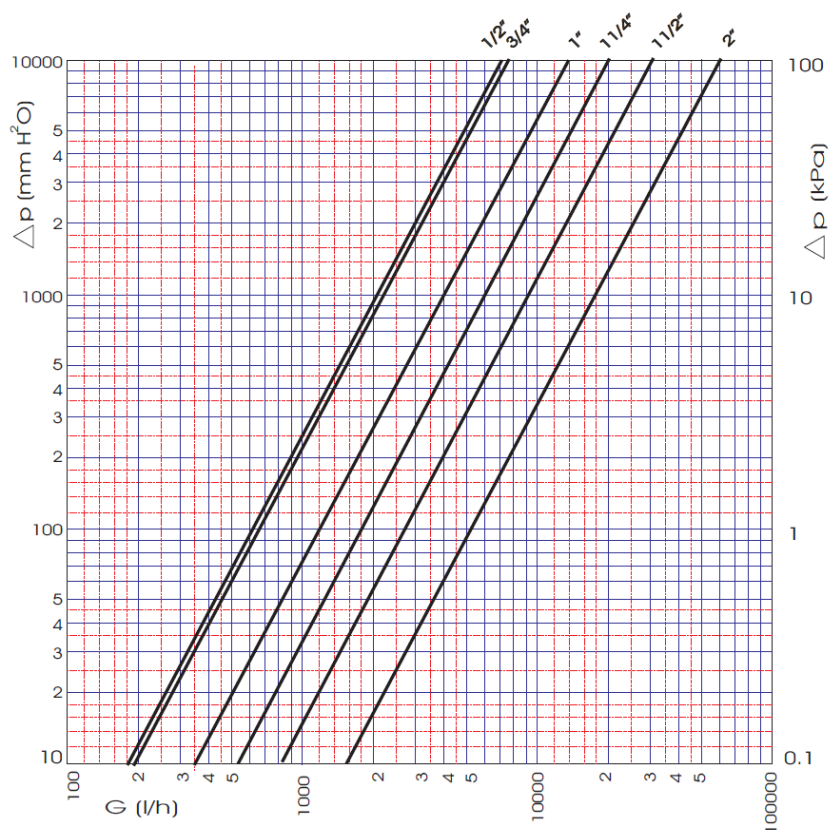

Dim.	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Kv	7.0	7.5	14.5	20	31	60
PN	25	25	25	16	16	16

Kv-værdierne er udregnet med et FM28-filter

TEMPERATUR / TRYKDIAGRAM

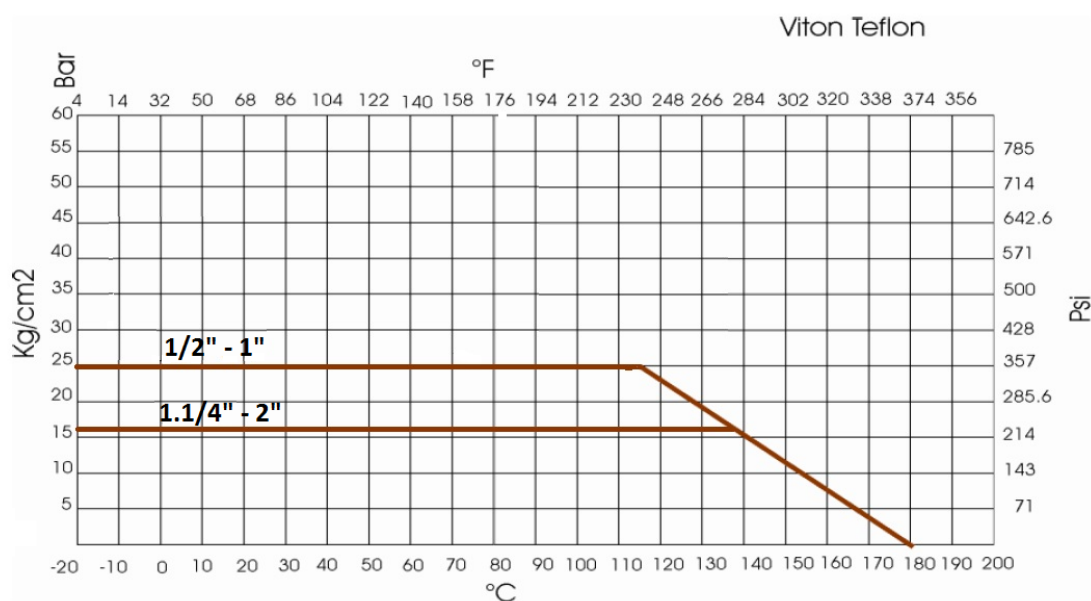

ANBEFALET DRIFTSTEMPERATUR / MAKSIMALTRYK

25 bar - 115°C - non shock

10 bar - 150°C - non shock

Maks. differenstryk - 10 bar