

### Safety Information

Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.

A qualified person is one who has skills and knowledge related to the construction, installation, and operation of electrical equipment and has received safety training to recognize and avoid the hazards involved.

### Esmi Impresia Base Base Sounder Beacon

The Esmi Impresia Base Base Sounder Beacon (FFS06741031) is an addressable sounder with strobe base and a built-in isolator module, compatible with all Esmi Impresia standard bases. The sounder is designed for installation in addressable fire alarm systems with ELC Loop Controllers, which communicate via the ELC communication protocol. The device is powered from the panel and can be controlled via the communication protocol. The device supports 32 different tone types at two sound levels. The tone type and sound level are programmed from the control panel.

The Esmi Impresia Base Base Sounder Beacon is compatible with Esmi Impresia detectors. The sounder is compatible with the following bases:

1. Esmi Impresia Standard Base (FFS06741018) - Standard low profile base for addressable detectors and sounders.
2. Esmi Impresia Standard Base High Profile (FFS06741028) - Standard high profile base for addressable detectors and sounders.

The sounder is compatible with the following cover:

1. Esmi Impresia Plastic Lid (FFS06741023).

For more technical information visit [www.se.com](http://www.se.com).



**CE**<sub>24</sub>  
1293  
DoP No: DP23030  
Made in Bulgaria  
EN 54-3:2001  
EN 54-3:2001/A1:2002  
EN 54-3:2001/A2:2006  
EN 54-17:2005  
EN 54-17:2005/AC:2007  
Sounder Type: A

Schneider Electric Buildings AB  
Mobilvägen 8  
22362 Lund  
Sweden

### ⚠ WARNING

#### COMPROMISED FUNCTIONALITY

- Make sure that the setup where the device is installed meets the device specifications.
- Remove the sounder beacon if it will be exposed to excessive dust or similar, due to, for example, maintenance work.
- Make sure that the corresponding address is enabled in the fire detection panel when the sounder beacon is re-installed.


**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

|  |                         |
|--|-------------------------|
| Placement .....  | Indoors                 |
| Operating temperature .....                              | -10 °C to +55 °C        |
| Operating voltage range .....                            | 16 to 32 VDC            |
| Maximal consumption at communication .....               | 470 µA @ 27 VDC         |
| Maximal consumption:                                     |                         |
| - main tone type 27, low volume level .....              | 3 mA @ 27 VDC           |
| - main tone type 27, high volume level .....             | 10 mA @ 27 VDC          |
| Power volume (main tone type 27):                        |                         |
| - low volume (up to 100 pcs sounders* to the loop) ..... | ~ 81dB (A) ± 3 dB @ 1 m |
| - high volume (up to 30 pcs sounders* to the loop) ..... | ~ 88dB (A) ± 3 dB @ 1 m |
| Power volume (other tone types):                         |                         |
| - low volume (up to 100 pcs sounders* to the loop) ..... | ~ 81dB (A) ± 3 dB @ 1 m |
| - high volume (up to 30 pcs sounders* to the loop) ..... | ~ 87dB (A) ± 3 dB @ 1 m |
| Frequency of the strobe flash.....                       | 1 Hz                    |
| Number of tone types .....                               | 32                      |
| Supported communication protocol .....                   | ELC                     |
| Relative humidity resistance .....                       | (93 ± 3)% @ +40°C       |
| Material .....   | SAN/transparent         |

\* Esmi Impresia Base Base Sounder Beacon (FFS06741031)

### Technical Specifications

#### Dimensions

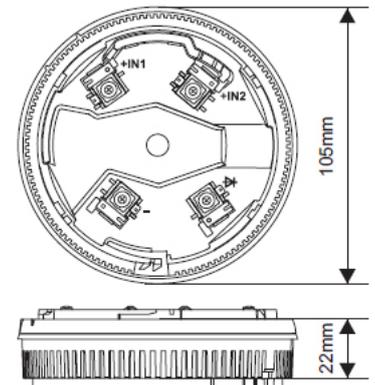

#### Installation



**IP21C\***

\* With mounted detector



Indoor use



-10°C + +55°C



~120g


**Isolator Module Technical Specifications**

|  |                                  |
|--|----------------------------------|
| Maximum line voltage ( <i>V<sub>max</sub></i> ).....   | 32 V                             |
| Nominal line voltage ( <i>V<sub>nom</sub></i> ).....   | 28 V                             |
| Minimum line voltage ( <i>V<sub>min</sub></i> ).....   | 16 V                             |
| <i>V<sub>so</sub> max</i> . Max. voltage at which the device isolates*                         | 7.5 V                            |
| <i>V<sub>so</sub> min</i> . Min. voltage at which the device isolates*                         | 5.9 V                            |
| <i>V<sub>sc</sub> max</i> . Max. voltage at which the device reconnects**                      | 6.7 V                            |
| <i>V<sub>sc</sub> min</i> . Min. voltage at which the device reconnects**                      | 5 V                              |
| <i>I<sub>c</sub> max</i> . . . Max. rated continuous current with the switch closed.....       | 0.7 A                            |
| <i>I<sub>s</sub> max</i> . . . Max. rated switching current (e.g. under short circuit) .....   | 1.8 A                            |
| <i>I<sub>l</sub> max</i> . . . Max. leakage current with the switch open (isolated state)..... | 16 mA                            |
| <i>Z<sub>c</sub> max</i> . . . Max. series impedance with the switch closed .....              | 0.12 Ω @ 28 VDC; 0.15 Ω @ 15 VDC |


\* *V<sub>so</sub> max/min*  
 Note: Switches from closed to open  
 \*\* *V<sub>sc</sub> max/min*  
 Note: Switches from open to closed

**Installation**


**1 Standard Bases - Locking & Unlocking**

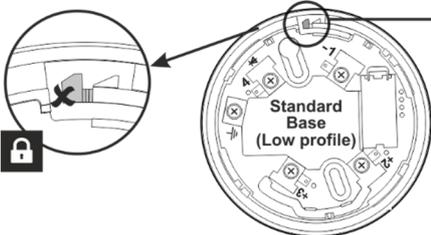

Standard Base (Low profile)  
ø103x11mm

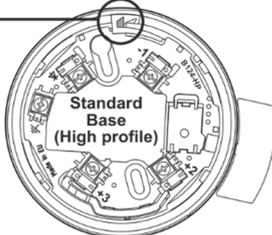


Standard Base (High profile)  
ø104x17.5mm




Unlocking the sounder from the base

**2 Standard Bases - Mounting**

FFS06741018  
Standard Base (Low profile)

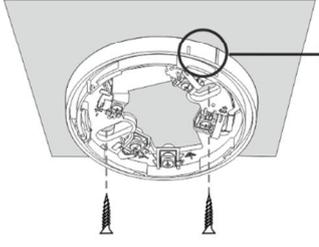

FFS06741028  
Standard Base (High profile)

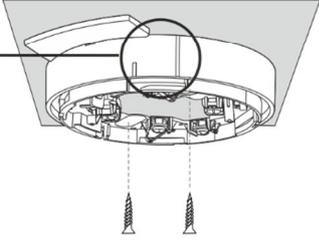

Use suitable screws according the type of the mounting surface

**3 Address Programming**

*Note: You may also program the address directly from the fire panel.*



### 4 Connection Diagram

**⚠ Attention: DO NOT CONNECT the earth terminal ( $\perp$ ) of the Standard Base and the Standard Base High Profile to the loop line!**

**Legend**

- RI - Remote Indicator
- +Loop - Positive loop wire
- Loop - Negative loop wire
- Mounting of Esmi Impresia detectors to Base Base Sounder Beacons, connecting built-in short circuit isolators in detectors and beacons

### 5 Installation

At the end of installation, the long marks on the Standard Base and the Base Base Sounder Beacon must be aligned with the single mark on the mounted detector.

| Tone | Tone Type | Tone Description/Application                                  | High Level [dB @ 1m] | Low Level [dB @ 1m] |
|------|-----------|---|----------------------|---------------------|
| 1    |           | 970Hz   | 88                   | 83                  |
| 2    |           | 800Hz/970Hz @ 2Hz   | 88                   | 83                  |
| 3    |           | 800Hz - 970Hz @ 1Hz   | 88                   | 82                  |
| 4    |           | 970Hz 1s OFF/1s ON  | 88                   | 83                  |
| 5    |           | 970Hz, 0.5s/ 630Hz, 0.5s                                      | 88                   | 83                  |
| 6    |           | 554Hz, 0.1s/ 440Hz, 0.4s (AFNOR NF S 32 001)                  | 86                   | 80                  |
| 7    |           | 500 - 1200Hz, 3.5s/ 0.5s OFF (NEN 2575:2000)                  | 88                   | 83                  |
| 8    |           | 420Hz 0.625s ON/0.625s OFF (Australia AS1670 Alert tone)      | 87                   | 80                  |
| 9    |           | 500 - 1200Hz, 0.5s/ 0.5s OFF x 3/1.5s OFF (AS1670 Evacuation) | 87                   | 81                  |
| 10   |           | 550Hz/440Hz @ 0.5Hz   | 86                   | 81                  |
| 11   |           | 970Hz, 0.5s ON/0.5s OFF x 3/ 1.5s OFF (ISO 8201)              | 88                   | 83                  |
| 12   |           | 2850Hz, 0.5s ON/0.5s OFF x 3/1.5s OFF (ISO 8201)              | 90                   | 85                  |
| 13   |           | 1200Hz - 500Hz @ 1Hz (DIN 33 404)                             | 87                   | 82                  |
| 14   |           | 400Hz   | 85                   | 80                  |
| 15   |           | 550Hz, 0.7s/1000Hz, 0.33s                                     | 87                   | 82                  |
| 16   |           | 1500Hz - 2700Hz @ 3Hz   | 86                   | 81                  |
| 17   |           | 750Hz   | 87                   | 82                  |
| 18   |           | 2400Hz  | 86                   | 78                  |
| 19   |           | 660Hz   | 87                   | 80                  |
| 20   |           | 660Hz 1.8s ON/1.8s OFF  | 86                   | 80                  |
| 21   |           | 660Hz 0.15s ON/0.15s OFF                                      | 86                   | 79                  |
| 22   |           | 510Hz, 0.25s/ 610Hz, 0.25s                                    | 87                   | 80                  |
| 23   |           | 800/1000Hz 0.5s each (1Hz)                                    | 87                   | 83                  |
| 24   |           | 250Hz - 1200Hz @ 12Hz   | 86                   | 80                  |
| 25   |           | 500Hz - 1200Hz @ 0.33Hz                                       | 87                   | 82                  |
| 26   |           | 2400Hz - 2900Hz @ 9Hz   | 87                   | 82                  |
| 27   |           | 2400Hz – 2900Hz @ 3Hz<br>2500Hz (main sound frequency)        | 88                   | 81                  |
| 28   |           | 800Hz - 970Hz @ 100Hz   | 87                   | 81                  |
| 29   |           | 800Hz - 970Hz @ 9Hz   | 87                   | 80                  |
| 30   |           | 800Hz - 970Hz @ 3Hz   | 87                   | 81                  |
| 31   |           | 800Hz, 0.25s ON/1s OFF  | 86                   | 79                  |
| 32   |           | 600Hz – 1100Hz, 2.6s/0.4s OFF                                 | 88                   | 83                  |