

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** 4Lite

**Supplier's address:** ANSELL (WARRINGTON), Ansell Electrical Products Ltd Unit 6B Stonecross Ind. Park Yew Tree Way Warrington Cheshire WA3 3JD

**Model identifier:** 4L1/1008

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Lamp		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------


### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	14	Energy efficiency class	E
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 700 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000 or 4 000
On-mode power ( $P_{on}$ ), expressed in W	14,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,50
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	856	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	23	
	Depth	37	
			See image in last page


ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,381 0,377
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	80	Survival factor	0,90
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,70	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,4

(a): not applicable;

(b): not applicable;

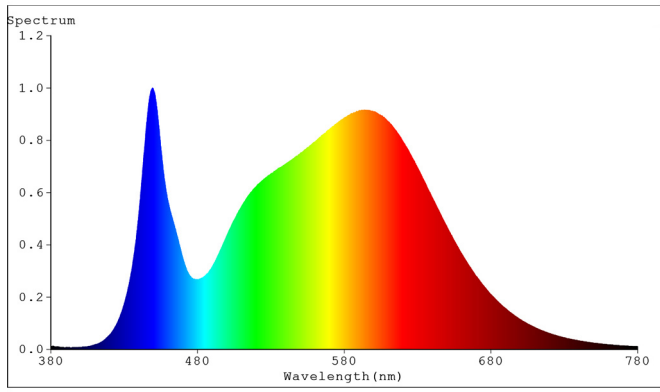

Model placed on the Union market from 31/05/2025



**EPREL registration number:** 2347970

<https://eprel.ec.europa.eu/qr/2347970>

**Supplier:** Ansell (Sales & Distribution) Republic of Ireland (Manufacturer)

**Website:** <http://www.anselluk.com/>

**Customer care service:**

**Name:** ANSELL (WARRINGTON)

**Website:** <http://www.anselluk.com/>

**Email:** [saleswarrington@anselluk.com](mailto:saleswarrington@anselluk.com)

**Phone:** 01942 433333

**Address:**

Ansell Electrical Products Ltd  
Unit 6B Stonecross Ind. Park  
Yew Tree Way  
Warrington  
Cheshire  
WA3 3JD