



SVEN

136-1004s69d

SVEN PD SUSPENSION made of felt, black, similar to RAL 9005, opal silicone diffuser anthrazite, beam 130°, light output direct, with converter, max. 700mA, dimmability: DALI, cable black, adapter/ceiling base black, pendant length 3000mm, IP20 Flame retardant according to DIN EN 13501 B-s2, d0,

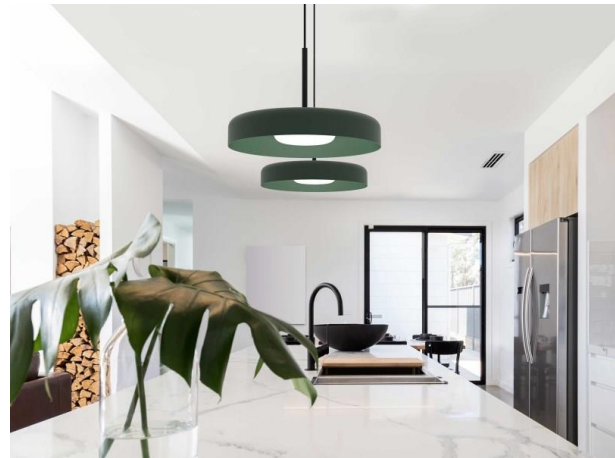


DRAWING

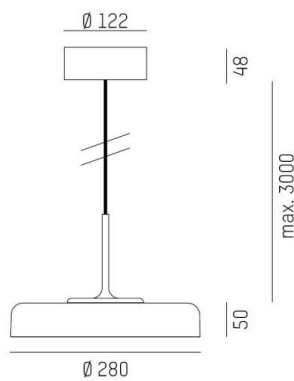

TECHNICAL DETAILS

|                             |                        |
|-----------------------------|------------------------|
| System perform. [W]         | 15                     |
| Bulb type                   | LED                    |
| Luminous flux [lm]          | 1045                   |
| Current sec. [mA]           | 700                    |
| Colour temp. [K]            | 2700/3000K             |
| CRI                         | >90                    |
| Optics                      | opal silicone diffuser |
| Designer                    | Rainer Mutsch          |
| Converter                   | with converter         |
| Light output                | direct                 |
| Beam angle [°]              | 130°                   |
| Voltage [V]                 | 220-240V 50/60Hz       |
| Material                    | felt                   |
| Length [mm]                 | 280                    |
| Height [mm]                 | 50                     |
| Pendant length [mm]         | 3000                   |
| Diameter [mm]               | 280                    |
| IP protection class         | IP20                   |
| Voltage class               | protection cl. II      |
| Net weight [kg]             | 0,79                   |
| Colour lamp                 | black                  |
| RAL                         | 9005                   |
| Colour of glass/shade       | anthrazite             |
| Colour adapter/ceiling base | black                  |
| Electric wire               | black                  |
| EAN-Number                  | 9010506714562          |
| Lifetime [h]                | L80 B10 50 000         |
| Energy efficiency cl.       | D                      |

LIGHT DISTRIBUTION CURVE

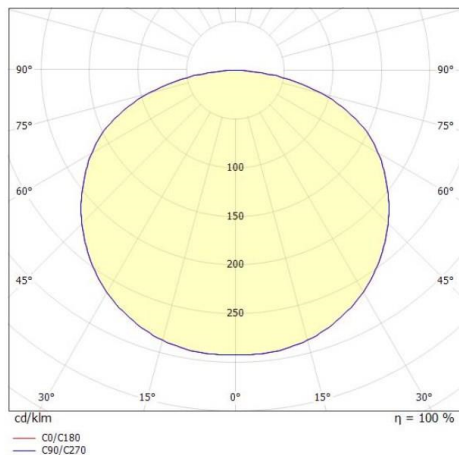

energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.