

# LAN-OPTIC

MPO/F/APC-MPO/F/APC 12 fiber kabel 100 m  
OS2 med ekstra LSZH kappe Method A



## Anvendelse

Anvendes som fiberbackbone i datainstallationer mellem krydsfelter eller i Datacentre mellem krydsfelter.

Leveres færdigtemineret klar til brug - et meget tidsbesparende produkt. Samt med trækøje strømpe for beskyttelse af kablet under installation.

Varenr.: 235535  
EANnr.: 5706683028953

## Specifikation

Fiber: OS2 9/125 $\mu$

Antal fibre: 12 stk.

Loss: Low Loss < 0,35dB

Methode: A

Ende A: MPO/F/APC

Ende B: MPO/F/APC

Kappe materiale: LSZH

Kappe farve: Gul

Trækøjs strømpe: Nylon

Længde: 100 mtr.


Fabrikant: Lan-Optic

Pakning: 1 stk.



# LAN-OPTIC

## MPO/F/APC-MPO/F/APC 12 fiber kabel 100 m OS2 med ekstra LSZH kappe Method A


Description: MPOAPC(F) to MPOAPC(F) SM 12 Cores 3.0mm Optical Fiber Patch Cord.

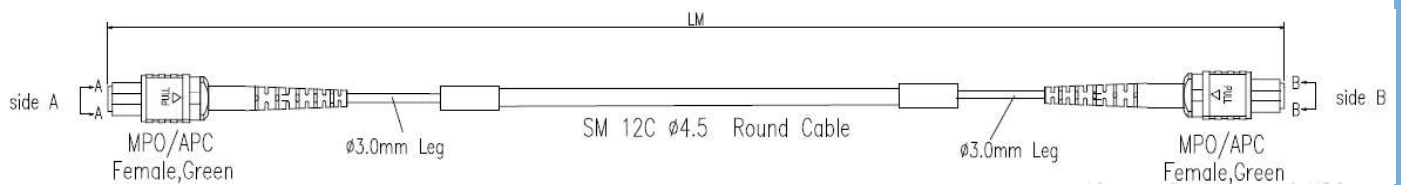

12cores fiber color of MPO connector

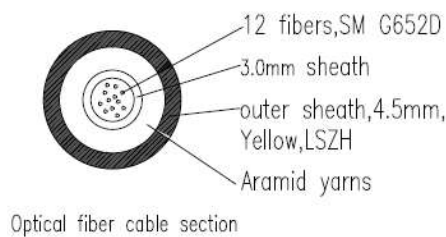

12cores fiber color of MPO connector



Technical requirements:


1. Performance Index:

MPO: IL ≤ 0.7dB, RL ≥ 60dB @ 1310nm;

2. NO dust cap showing on the drawing.

3. Polarity: A.

4. ROHS Compliant.

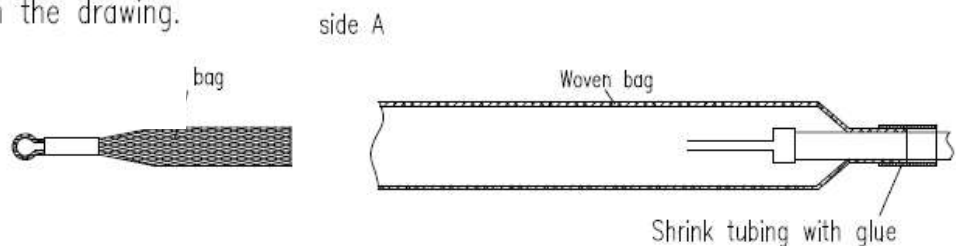

LENGTH(L)	TOLERANCE
L ≤ 1M	+50mm/0
1M < L ≤ 3M	+100mm/0
3M < L ≤ 10M	±100mm
10M < L ≤ 30M	±150mm
L > 30M	±200mm