

LAN-COM

SWITCH 10/100/1000 24xRJ45+4gigabit SFP



Anvendelse

24 port fast Ethernet Switch.

Velegnet som backbone Switch i kontormiljø, hvor høj hastighed ønskes.

Specifikation

24 10/100/1000mbps RJ45 porte:
4xSFP Slot Gigabit

Switching kapacitet: 56 Gbps

Packet forwarding rate: 41,66 Mbps


Packet buffer: 12 Mbit

Varenr.: 227830

EANnr.: 5706683026539

24-Port Gigabit L2+ Managed Switch with 4 SFP Slots

- Full Gigabit Ports: 24× gigabit RJ45 ports and 4× gigabit SFP Slots provide high-speed connections.
- Integrated into Omada SDN: Zero-Touch Provisioning (ZTP)*, Centralized Cloud Management, and Intelligent Monitoring.
- Centralized Management: Cloud access and Omada app for ultra convenience and easy management.
- Static Routing: Helps route internal traffic for more efficient use of network resources.
- Robust Security Strategies: IP-MAC-Port Binding, ACL, Port Security, DoS Defend, Storm control, DHCP Snooping, 802.1X, Radius Authentication, and more.
- Optimize Voice and Video Applications: L2/L3/L4 QoS and IGMP snooping.
- Standalone Management: Web, CLI (Console Port, Telnet, SSH), SNMP, RMON, and Dual Image bring powerful management capabilities

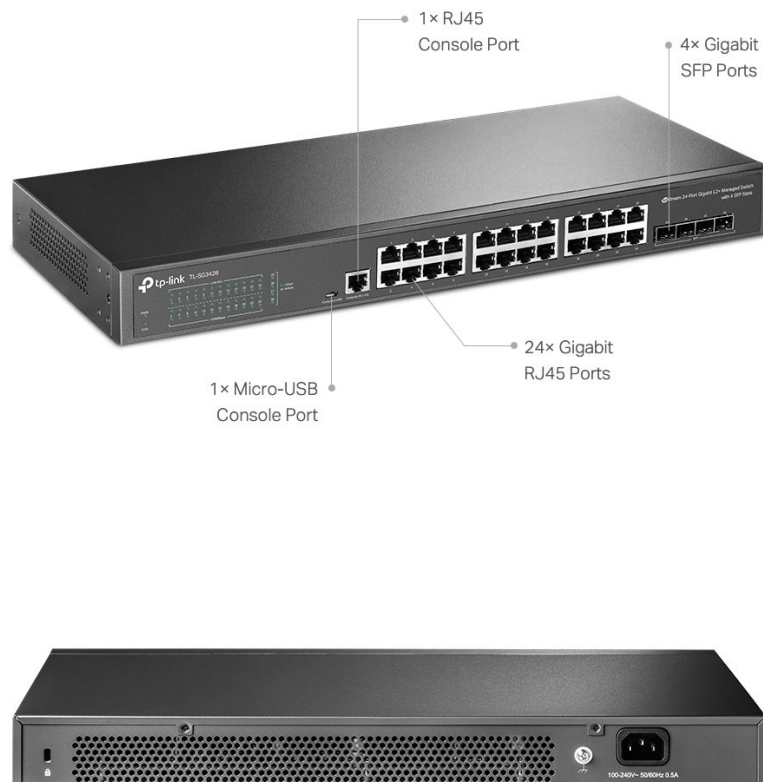



HARDWARE FEATURES

Interface • 24× 10/100/1000 Mbps RJ45 Ports
• 4× Gigabit SFP Slots
• 1× RJ45 Console Port
• 1× Micro-USB Console Port
Fan Quantity Fanless
Power Supply 100-240 V AC~50/60 Hz
Dimensions (W x D x H) 17.3 × 7.1 × 1.7 in (440 × 180 × 44 mm)
Mounting Rack Mountable
Max Power Consumption 19.9 W (220 V/50 Hz)
Max Heat Dissipation 67.73 BTU/h (220 V/50 Hz)

PERFORMANCE

Switching Capacity 56 Gbps
Packet Forwarding Rate 41.66 Mpps
MAC Address Table 16K
Jumbo Frame 9 KB

OTHERS

Certification CE, FCC, RoHS

Environment

- Operating Temperature: 0–45 °C (32–113 °F);
- Storage Temperature: -40–70 °C (-40–158 °F)
- Operating Humidity: 10–90% RH non-condensing
- Storage Humidity: 5–90% RH non-condensing