




Accessories
4068754021135
L 700, B 85, H 37

Recessed ceiling mounting
white

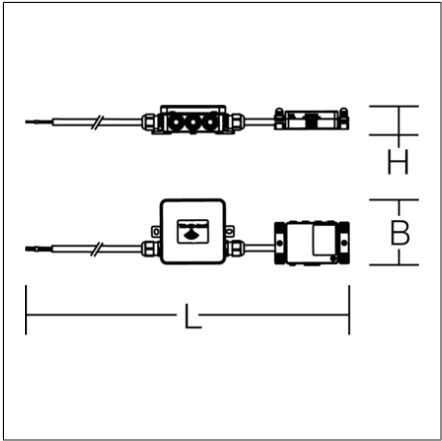

HF movement sensor in separate box. Not suitable for metal ceilings. Connecting box incl. strain relief, with 5-pole connection terminal connected to motion sensor by 150 mm long 5-core connection cable. 2-pole cable between motion detector and luminaire 600 mm long with open wire ends. Movement sensor adjustable with buttons Movement sensor functional parameters: HF detector 5.8 GHz. Holding time: 5 sec. - 30 min., adjustable in 7 steps. Detection angle 30°-150°. Range: up to 10 m, adjustable in up to 5 steps. Adjustable in control gear box. Brightness sensor without function.

Product specifications

Length L	700 mm
Width B	85 mm
Height H	37 mm
Weight	222 g
Voltage	220 - 240 V / 50 Hz, 60 Hz
Type of protection	IP 20
Protection class	II
Filament test	650 °C
Impact resistance	IK02
Ambient temperature	-20 °C to +35 °C
Safety marks	Do not cover the recessed luminaire!
Conformity mark	CE, EAC