



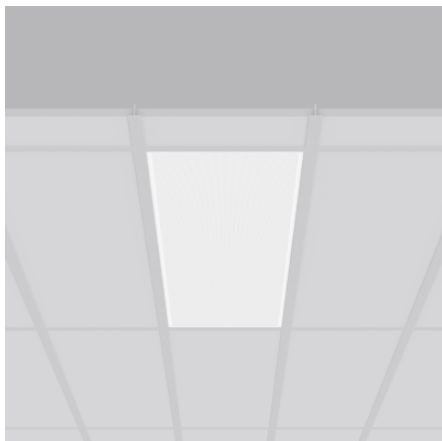

Lay-in luminaires
4068754028134
L 1195, B 295

Lay-in luminaires
white

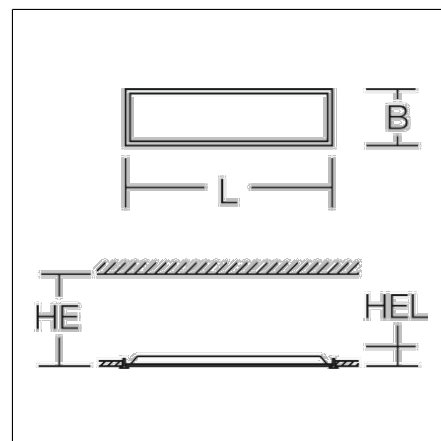

Lay-in luminaire for ceiling systems with visible mounting rails. Housing made of sheet steel, powder-coated. Luminaire frame: aluminium, powder-coated. Diffuser made of non-yellowing plastic (PMMA) microprismatic. External driver. MultiLumen: 4 steps adjustable luminous flux. Factory setting step 2. Perfect for office areas ($RUG \leq 19$) and environments with computer screens in accordance with EN 12464-1.

Product specifications

Length L	1195 mm
Width B	295 mm
Luminaire: recess height HEL	37 mm
Installation space height HE	160 mm
Weight	2.15 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	3300 lm 3850 lm 4350 lm 4950 lm
System power	20 W 24 W 28 W 32 W
System efficiency	155 lm/W 155 lm/W 160 lm/W 165 lm/W
Glare evaluation RUG (4H 8H)	18 18,6 19 19,5
Beam angle	91°/89°
LED rated life	100000 h (L80/B50) 50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance (McAdam)	3 SDCM
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	18
Luminaires on B16A fuse	28
Luminaires on C10A fuse	27
Luminaires on C16A fuse	42
Inrush current / Inrush current duration	30 A / 100 µs
CIE Flux Code / CEN Flux Code	61 88 97 100 100
Type of protection	IP 40 on room side IP 20
Protection class	II
Filament test	650 °C
Impact resistance	IK03
Ambient temperature	5 °C to +35 °C
Safety marks	Do not cover the recessed luminaire!
Conformity mark	CE