


TECHNICAL DATA SHEET

PLUGS CLIPS, ROUND LEAD

tillex®

MADE IN DENMARK SINCE 1954



Plastmaterial: High impact elastic polypropylene - halogen free and UV-stabilized.
Nail: Hardened steel nails, Corrosion Class C4.
 Can be installed both indoors and outdoors.



INSTALLATION

- For installation on flat surfaces.
- Drill hole with 5.5-6 mm drill, mount plugs clip and hit the nail in.
- Suitable for brick and concrete.

DIMENSIONS

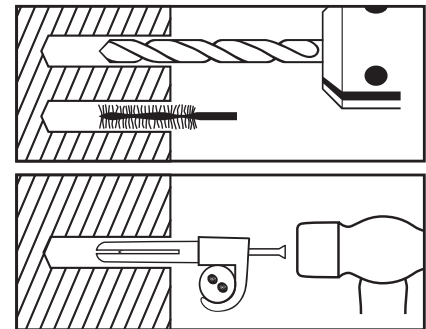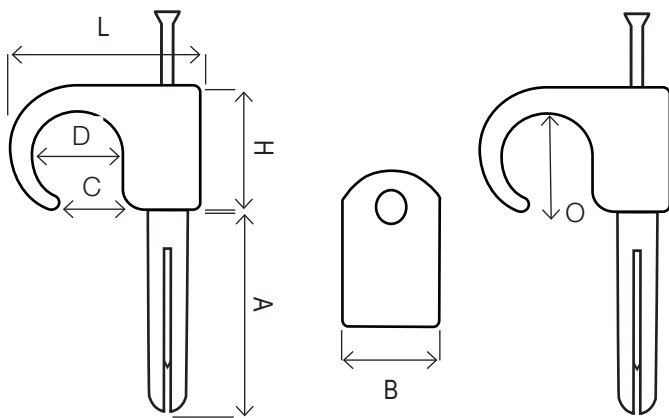

PRODUCT RANGE (BOXES)



| Ref. nr. | Type | Nail. mm | Colour | Dim.L mm | Dim.B mm | Dim.H mm | Dim.A mm | Dim.C mm | Dim.D mm | Dim.O mm | Drill Ø, mm | QTY box |
|----------|------------|----------|--------|----------|----------|----------|----------|----------|----------|----------|-------------|---------|
| 102224 | PC 8-12 G | 2,0x35 | grey | 15,2 | 9,8 | 11,0 | 20,7 | 6,5 | 7,5 | 8,0 | 5,5-6 mm | 100 |
| 102217 | PC 8-12 W | 2,0x35 | white | 15,2 | 9,8 | 11,0 | 20,7 | 6,5 | 7,5 | 8,0 | 5,5-6 mm | 100 |
| 104228 | PC 10-14 G | 2,0x35 | grey | 16,7 | 11,3 | 12,6 | 20,7 | 7,5 | 9,0 | 9,5 | 5,5-6 mm | 100 |
| 104211 | PC 10-14 W | 2,0x35 | white | 16,7 | 11,3 | 12,6 | 20,7 | 7,5 | 9,0 | 9,5 | 5,5-6 mm | 100 |
| 106222 | PC 14-18 G | 2,5x40 | grey | 21,3 | 14,9 | 20,0 | 20,9 | 10,0 | 12,0 | 16,0 | 5,5-6 mm | 100 |
| 106215 | PC 14-18 W | 2,5x40 | white | 21,3 | 14,9 | 20,0 | 20,9 | 10,0 | 12,0 | 16,0 | 5,5-6 mm | 100 |
| 108233 | PC 18-22 G | 2,5x40 | grey | 25,9 | 13,7 | 22,6 | 21,0 | 12,0 | 17,0 | 19,0 | 5,5-6 mm | 50 |
| 108202 | PC 18-22 W | 2,5x40 | white | 25,9 | 13,7 | 22,6 | 21,0 | 12,0 | 17,0 | 19,0 | 5,5-6 mm | 50 |

PRODUCT RANGE (XXL BUCKET)



| Ref. nr. | Type | Nail. mm | Colour | Dim.L mm | Dim.B mm | Dim.H mm | Dim.A mm | Dim.C mm | Dim.D mm | Dim.O mm | Drill Ø, mm | QTY bucket |
|----------|------------|----------|--------|----------|----------|----------|----------|----------|----------|----------|-------------|------------|
| 107212 | PC 14-18 W | 2,5x40 | white | 21,3 | 14,9 | 14,9 | 20,9 | 10,0 | 12,0 | 16,0 | 5,5-6 mm | 1100 |
| 107229 | PC 14-18 G | 2,5x40 | grey | 21,3 | 14,9 | 14,9 | 20,9 | 10,0 | 12,0 | 16,0 | 5,5-6 mm | 1100 |
| 109209 | PC 18-22 W | 2,5x40 | white | 25,9 | 13,7 | 22,6 | 21,0 | 12,0 | 17,0 | 19,0 | 5,5-6 mm | 1000 |
| 109230 | PC 18-22 G | 2,5x40 | grey | 25,9 | 13,7 | 22,6 | 21,0 | 12,0 | 17,0 | 19,0 | 5,5-6 mm | 1000 |