

APPLICATIONS

- Threaded connectors stud screw STST
- Wood and metric screw combination for direct installation of clamps onto a wall


ADVANTAGES/BENEFITS

- Fixing with a Nylon plug to brick or direct into timber construction is simple with the torx drive or the integrated hexagon.

PROPERTIES


- **Material:** steel 4.6 acc. to DIN EN ISO 898-1
- **Zinc plating:** electro zinc-plated, min. 3 µm

TECHNICAL DATA

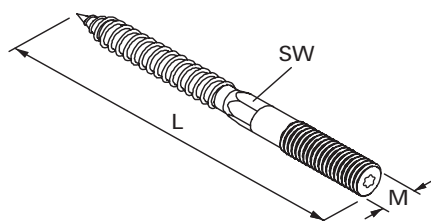

Item	Art.-No.	Length l [mm]	Thread M	Drive	Width across nut ○SW [mm]	Sales unit [pcs]
STST 6 x 60	504400 ¹⁾	60	M 6	T15	—	100
STST 6 x 80	077714 ¹⁾	80	M 6	T15	—	100
STST 8 x 50	079780 ¹⁾	50	M 8	T25	—	100
STST 8 x 60	079781	60	M 8	T25	6	100
STST 8 x 80	079782	80	M 8	T25	6	100
STST 8 x 100	079783	100	M 8	T25	6	100
STST 8 x 120	079784	120	M 8	T25	6	100
STST 8 x 140	079785	140	M 8	T25	6	50
STST 8 x 180	079786	180	M 8	T25	6	50
STST 10 x 60	077689	60	M 10	T25	8	100
STST 10 x 80	077707	80	M 10	T25	8	100
STST 10 x 100	077708	100	M 10	T25	8	100
STST 10 x 120	077709	120	M 10	T25	8	100
STST 10 x 140	077711	140	M 10	T25	8	50
STST 10 x 180	077712	180	M 10	T25	8	50
STST 12 x 100	535541	100	M 12	T30	10	100
STST 12 x 160	535542	160	M 12	T30	10	50

¹⁾ without hex shank

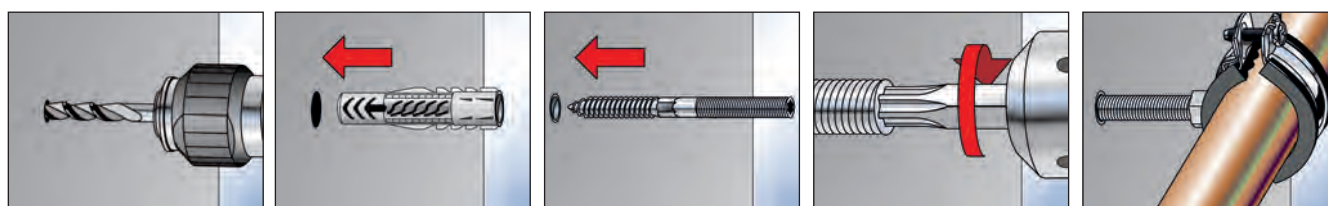

2g

Accessories