


DATASHEET

AAA / LR03 INDUSTRIAL PRO



INDUSTRY STANDARD DIMENSIONS (MM)

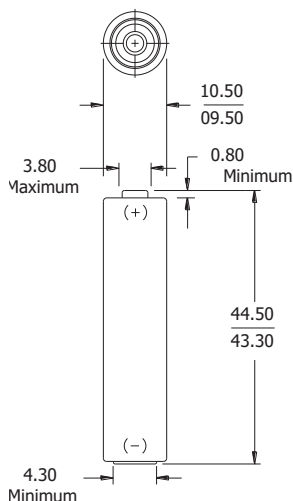


JAPCELL®


SPECIFICATIONS

Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂) No added mercury or cadmium
Designation:	ANSI-24A, IEC-LR3
Nominal Voltage:	1.5 volts
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Typical Weight:	11.5 grams
Typical Volume:	3.8 cubic centimeters
Shelf Life:	10 years at 21°C
Terminal:	Flat Contact

Continue discharge to 0.8 volts at 20± 2°C Capacity (mAh)

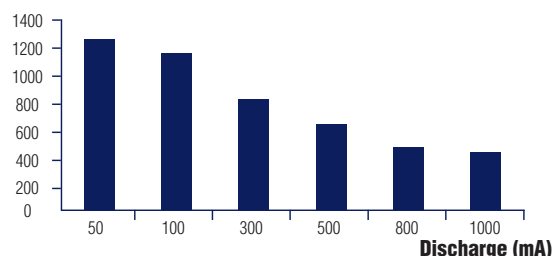

100mA Continue discharge to 0.9 volts at 20± 2°C

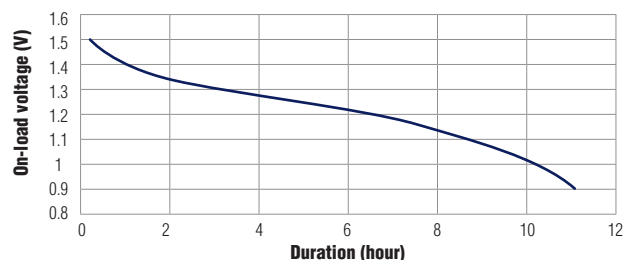

Industry Standard Tests (21°C)

Application	Load	Daily period	End voltage (V)	Unit	Normal
Portable lighting	5.1Ω	4m/h,8h/d	0.9	min	286
Remote control	24Ω	15s/m,8h/d	1.0	hour	23.0
Toy	5.1Ω	1h/d	0.8	min	297
Digital audio	50mA	1h/12h,24h/d	0.9	hour	25.0
Photo flash	600mA	10s/m,1h/d	0.9	pulse	435
*	100mA	24h/d	0.9	hour	10.9

Compliant to: IEC 60086, Non-dangerous goods regulation and EU directive 2006/66/EC

Important Notice: This datasheet contains typical information specific to products manufactured at the time of its publication.

JAPCELL®

Spettrupvej 1A • 8722 Hedensted • Denmark
sales@lakuda.dk • VAT: 25628829 • Phone: +45 76407010 • www.lakuda.dk