


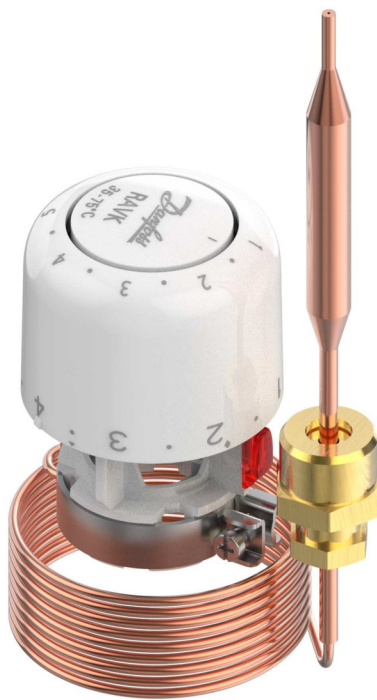

Actuators - Temperature

RAVK

Description

RAVK is self-acting thermostatic actuator primarily for use for temperature control of small hot water cylinders (e.g. storage tanks) or heat exchangers in radiator heating systems.

RAVK can be combined with:

- 2-way valves RAV-/8, VMT-/8, VMA, or
- 3-way valves VMV and KOVM

Controller closes on rising temperature.

RAVK 25-45 °C can be combined with VMV DN 15 and DN 20 valves. This combination is used for temperature control in a mixing loop for hot water service.

Main data:

- DN 10-25
- k_v 0.25-4.0 m³/h
- PN 10 with RAV-/8, VMT-/8 and KOVM valves
- PN 16 with VMA and VMV valves
- Setting ranges:
 - 10 ... 30 °C with RAV-/8, VMT-/8, VMA, KOVM valves
 - 25 ... 45 °C with VMV DN 15 - 20 valves
 - 25 ... 65 °C with RAV-/8, VMT-/8, VMA, KOVM valves
 - 35 ... 75 °C with RAV-/8, VMT-/8, VMA, KOVM valves
- Temperature:
 - Circ. water / glycolic water up to 30 %:
 - 2 ... 90 °C with KOVM valves
 - 2 ... 120 °C with RAV-/8, VMT-/8 and VMV valves
 - 2 ... 130 °C with VMA valves
- Flow and return mounting


Features & benefits

- Self-acting temperature control for small hot water cylinders and heat exchangers – no external power needed
- Adjustable setting range 25–65 °C (other ranges available), closes on rising temperature

Ordering

Product code numbers

RAVK thermostatic actuator

Picture	Setting range (°C)		Capillary length (m)	Max. sensor temp. (°C)	Code No. ¹⁾
	RAV / VMT / VMA / KOVM	VMV			
	10 ... 30	-	2.0	120	003L3680
	25 ... 65				003L3681
	35 ... 75				003L3682
	-	25 ... 45			003L3683

¹⁾ Incl. Sensor stuffing box Rp ½ × M14 × 1mm

Example:

Temperature controller, DN 15, k_v 1.6; PN 16; setting range 25 ... 65 °C; T_{max} 130 °C; 2-way valve with ext. thread;

- 1× RAVK thermostatic actuator, 25 ... 65 °C
Code No: **003L3681**
- 1× VMA DN 15 valve
Code No: **065F2034**

Option:

- 1× Immersion pocket, brass
Code No: **065-4414**
- 1× Weld-on tailpieces
Code No: **003H6908**


Valves

Type	Version	DN (mm)	k _{vs} (m³/h)	PN	Connection		Code No.
					inlet	outlet	
RAV 10/8	2-way	10	1.2	10	R _p ⅜	R ⅜	013U0012
RAV 15/8		15	1.5		R _p ½	R ½	013U0017
RAV 20/8		20	2.3		R _p ¾	R ¾	013U0022
RAV 25/8		25	3.1		R _p 1	R 1	013U0027
VMT 15/8 ¹⁾		15	1.5		R _p ¾		003L3523
VMT 20/8 ¹⁾		20	2.3		G 1 A		065F0120
VMT 25/8 ¹⁾		25	3.1		G 1 ¾ A		065F0125
VMA 15 ²⁾		15	0.25	16	G ¾ A	065F2030	
			0.4			065F2031	
			0.63			065F2032	
			1.0			065F2033	
			1.6			065F2034	
			2.5			065F2035	
VMV 15	3-way	15	2.5		R _p ½	065F0015	
VMV 20		20	4.0		R _p ¾	065F0020	
KOVM 15		15	0.63	10	R _p ½	013U3014	
			1.5		R _p ½	013U3015	
		2.0		R _p ½	013U3020		

¹⁾ For ordering of Cu fittings, see Accessories,

²⁾ For ordering ext., thread tailpieces, see Accessories,

Accessories code numbers



013U8102

**AVTB RAVI/K Adapt. R1/2 M14x1
Gasket f12.6/4 x 6**

AVTB RAVI/K Adapt. R1/2 M14x1 Gasket
f12.6/4 x 6



065-4414

**Immersion pockets, For product
type: AVT; RAVI/K, 170 mm, R 1/2,
BRASS**

Imm.pocket ,AVT; RAVI/K,
9.5mm,Brass(Sens.170)PN25



065-4415

**Immersion pockets, For product
type: AVT; RAVI/K, 170 mm, R 1/2,
Stainless steel**

Imm.pocket,AVT; RAVI/K,9.5mm,SS(Sensor
170),PN25

* code **013U8102** includes housing and gasket of sensor stuffing box




Accessories for valves

Type designations	For valve	Dimensions		Code No.
Compression fittings ^{1), 2)}	VMT 15	Ø 15 x 1		013G4125
		Ø 16 x 1		013G4126
		Ø 18 x 1		013G4128
	VMT 20	Ø 18 x 1		013U0134
		Ø 22 x 1		013U0135
	VMT 25	Ø 28 x 1		013U0140
Weld-on tailpieces	VMA 15	-		003H6908
External thread tailpieces		Con. ext. thread acc. to EN 10226-1	R ½"	003H6902
Compression fittings ^{1), 3), 4)}	KOVM 15 (G ½ A)	Ø 12 x 1		013G4112
		Ø 14 x 1		013G4114
		Ø 15 x 1		013G4115
		Ø 16 x 1		013G4116
Valve stuffing box ⁴⁾	RAV/VMT/VMA/VMV/KOVM			065F0006


¹⁾ Compression fitting consist of compression ring and union
²⁾ For copper pipe
³⁾ For steel and copper pipe
⁴⁾ The products can only be ordered in multiple packing containing 10 pieces each

Overview


Application examples

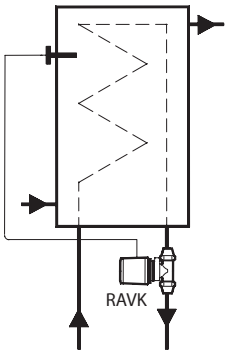

Hot water cylinder

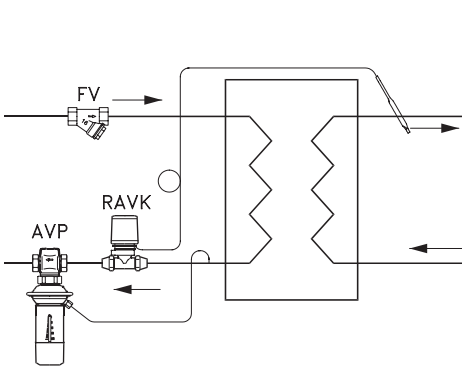

Heat exchanger in radiator heating system

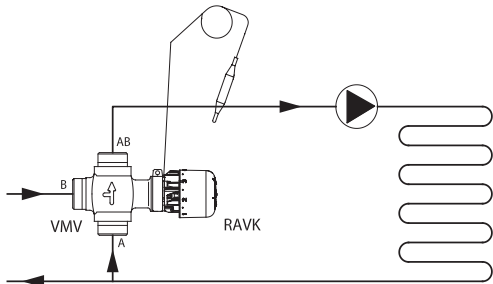

Combination of VMV and RAVK




Functions

Settings


Temperature setting
Relation between scale numbers 1-5 and closing temperature.

The values given are approximate.


RAVK 10 ... 30 °C with RAV, VMT, VMA and KOVM valves




RAVK 25 ... 45 °C with VMV valve



RAVK 25 ... 65 °C with RAV, VMT, VMA and KOVM valves



RAVK 35 ... 75 °C with RAV, VMT, VMA and KOVM valves




Product details

General data

Type RAVK	k _v (m ³ /h) at a P-band °C of					Max. pressure		Test pressure (bar)	Max. flow temp. (°C)	Max. sensor temp. (°C)
						PN	Δp			
	2	4	6	8	10	(bar)	(bar)			
RAV/VMT 10/8	0.35	0.65	0.85	1	1.1	10	0.8	16	120	120
RAV/VMT 15/8	0.5	0.75	0.95	1.1	1.2					
RAV/VMT 20/8	0.55	1.1	1.6	2	2.2					
RAV/VMT 25/8	0.6	1.2	1.8	2.2	2.3					
VMA 15 (k _{vs} = 0.25)	0.1	0.2	0.2	0.2	0.2	16	3.0	25	130	
VMA 15 (k _{vs} = 0.4)	0.1	0.3	0.3	0.3	0.3		3.0			
VMA 15 (k _{vs} = 0.63)	0.2	0.5	0.6	0.6	0.6		1.5			
VMA 15 (k _{vs} = 1.0)	0.2	0.5	0.7	0.7	0.7		1.5			
VMA 15 (k _{vs} = 1.6)	0.2	0.6	0.8	0.8	0.8		1.5			
VMA 15 (k _{vs} = 2.5)	0.4	0.9	1.3	1.3	1.3		0.5			
VMV 15 (k _{vs} = 2.5)	0.45	0.9	1.3	1.75	2.2	16	0.2	25	120	
VMV 20 (k _{vs} = 4.0)	0.7	1.4	2.1	2.8	3.6					
KOVM 15 (k _{vs} = 0.63)	0.3	0.4	0.5	0.6	0.6	10	0.8	16	90	
KOVM 15 (k _{vs} = 1.5)	0.7	0.9	1.2	1.3	1.5					
KOVM 15 (k _{vs} = 2.0)	0.9	1.3	1.6	1.8	2					

Materials	RAV/VMT	VMA	VMV	KOVM
Valve body	Brass	DZR	Rg 5	Brass
Valve cone	NBR rubber	EPDM	EPDM	EPDM
Spindle	-	DZR	St. steel	St. steel 18/8
Temp. sensor	Cu			
Immersion pocket	Brass or stainless steel			
Capillary tube	Cu			

Sizing

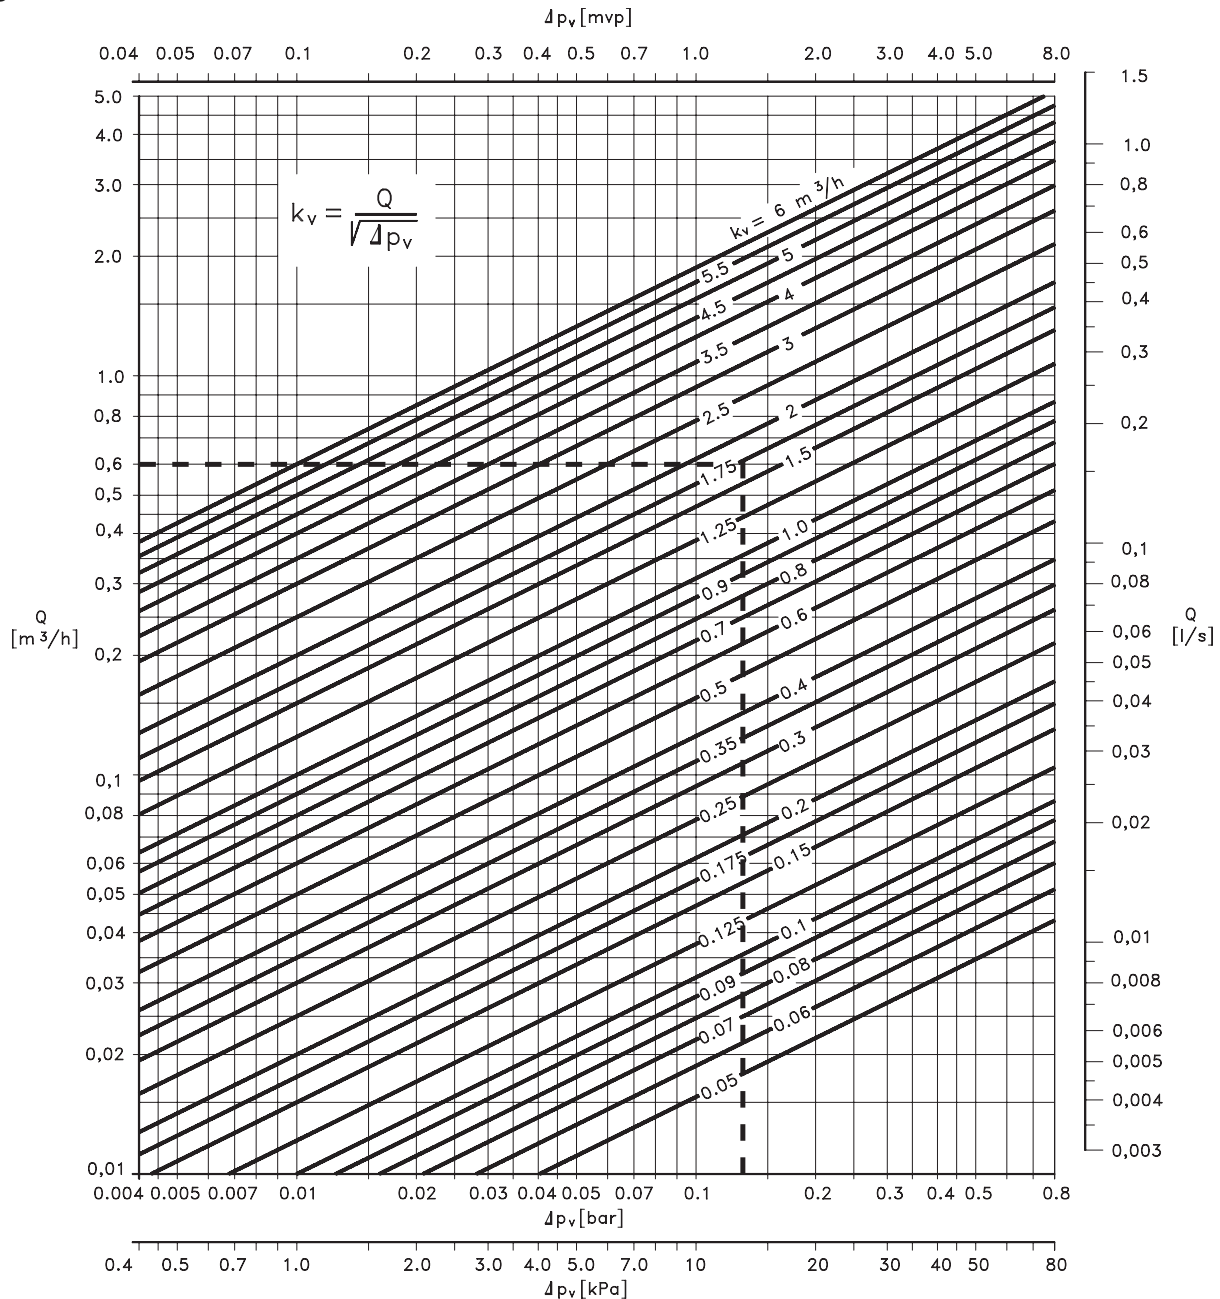

Example:

Temperature control of service hot water

Given data:

Tank output: 14 kW (12.000 kcal/h)

Cooling (flow – return): 20 °C

Flow:

$$\frac{12}{20} = 0.6 \text{ m}^3/\text{h}$$

Differential pressure Δp across valve: 0.12 bar

Required:

Correct valve size


Solution:

From water volume (0.6 m^3/h) and differential pressure (0.12 bar), read off the necessary k_v value in diagram = 1.75 .


In this example, a P-band of 6 °C is required. From the k_v columns in the table, under 6 °C, find the appropriate valve body. Here, the most suitable valve body is RAV 25/8 or VMT 25/8 with a k_v value of 1.8 .

Design

1. Handle for temperature setting
2. Setting spring
3. Bellows
4. Valve stuffing box
5. Bottom screw
6. Valve body
7. Valve cone
8. Temperature sensor
9. Sensor stuffing box
10. Housing of sensor stuffing box
11. Gasket of sensor stuffing box
12. Sealing bolt of sensor stuffing box

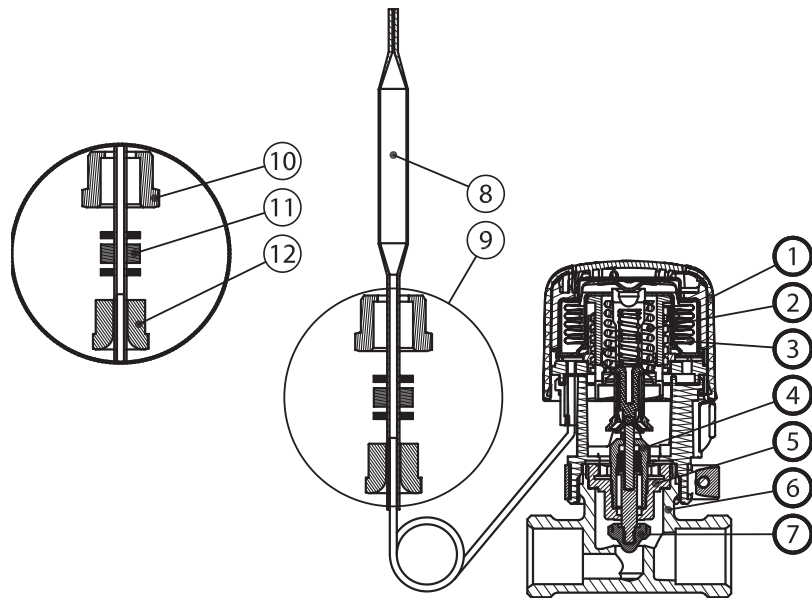


Dimensions

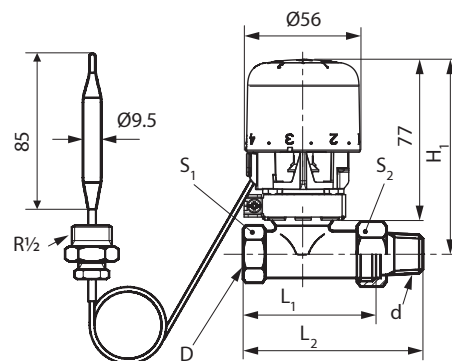


RAVK-RAV/8

Type	D	d	L ₁	L ₂	H ₁	Width across flats	
			(mm)			S ₁ (mm)	S ₂ (mm)
RAVK-RAV 10/8	R _p 3/8	R 3/8	59	85	90	22	27
RAVK-RAV 15/8	R _p 1/2	R 1/2	66	95	90	27	30
RAVK-RAV 20/8	R _p 3/4	R 3/4	74	106	90	32	37
RAVK-RAV 25/8	R _p 1	R 1	90	125	103	41	46

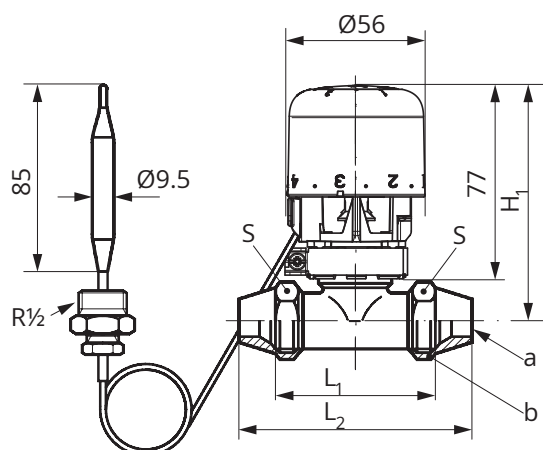
**RAVK-VMT-/8**

Type	a	b	L ₁	L ₂	H ₁	S
			(mm)			
RAVK-VMT 15/8	Ø 15/ Ø 16/ Ø 18	R ¾	66	90	90	90
RAVK-VMT 20/8	Ø 18/ Ø 22	R 1	74	101	90	37
RAVK-VMT 25/8	Ø 28	R 1 ¼	90	120	103	45

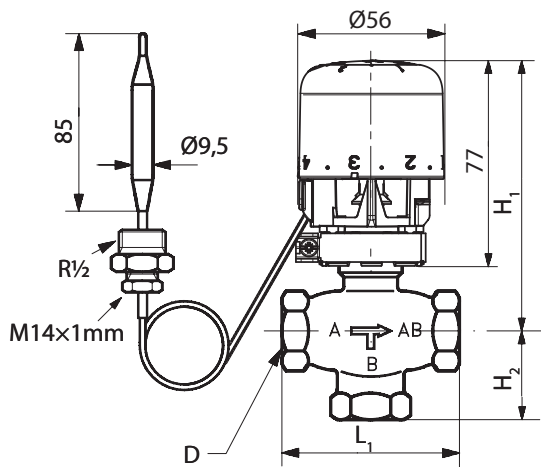


RAVK-VMV


Type	L ₁	H ₁	H ₂	D
	mm			
VMV 15	70	87	35	R _p 1/2
VMV 20	80	87	40	R _p 3/4

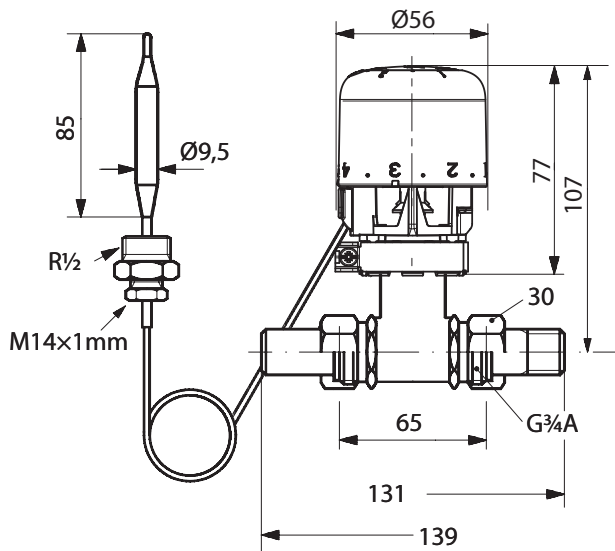


RAVK-VMA

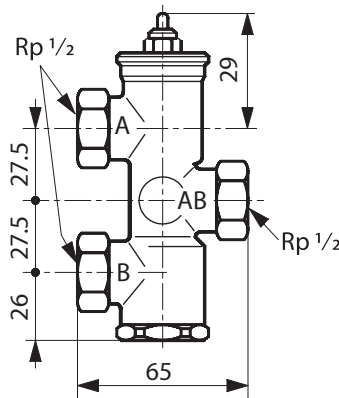


KOVM

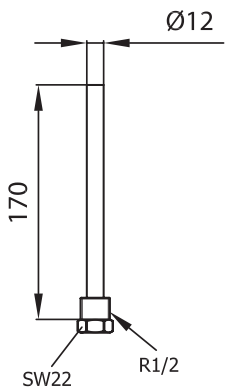

Immersion pockets

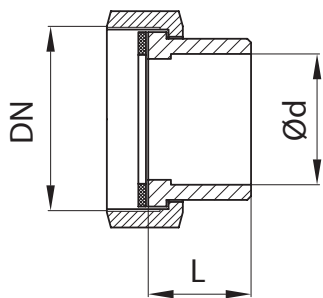

Weld-on tailpieces

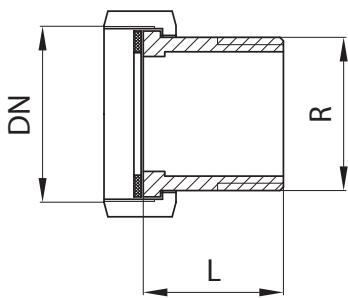

External thread tailpieces

G	Ød	L	Weight (kg)
mm			
15	15	35	0.18


G	R	L (mm)	Weight (kg)
"			
¾	½	25.5	0.17



Installation
Installation positions

Temperature controller
The valve body could be installed in the flow or return pipeline with flow in the direction indicated by the cast-in arrow.

Temperature sensor
The sensor could be installed in any position.

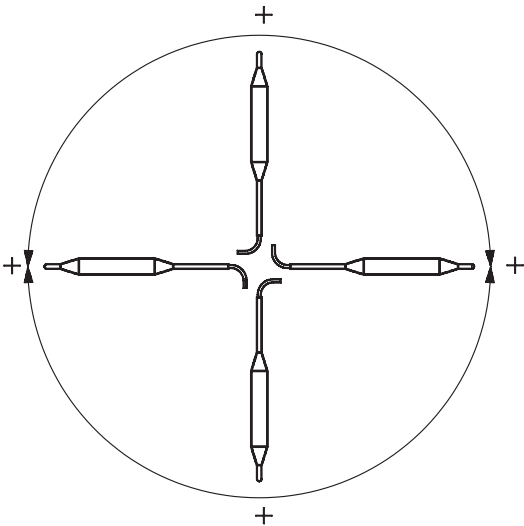

Certificates, declarations and approvals

The list contains all certificates, declarations, and approvals for this product type. Individual code number may have some or all of these approvals, and certain local approvals may not appear on the list.

When you click on the link you will be directed to the latest version of the ‘Declaration of Conformity’. Products developed and sold before this date of issue conform to the directives/standards in force at the time of their sale.

Approval type	Title	Certification body	Approval topic
Export Control Declaration	Actuators pressure flow and temperature	Danfoss	

Contact details

Online support

Danfoss offers a wide range of support along with our products, including digital information, software, mobile apps and expert guidance. See the possibilities below.



The Danfoss Design center

Discover the Design Center, our advanced digital platform that streamlines product selection. With integrated tools and enhanced type pages, it's simpler than ever to access product information and documentation, and to select the right products. Check the availability of Danfoss products at partner locations and enjoy seamless transitions from selection to purchase with our basket-to-basket functionality. Whether you're buying from our distributors or directly from the Product Store, the Design Center simplifies your experience. Learn more at: designcenter.danfoss.com.



The Danfoss product store

The Danfoss Product Store is a one-stop shop available 24/7 for our customers, no matter where you are in the world or what area of industry you work in. Browse our catalog, check product details and documentation, view your prices and product availability, and quickly finalize your purchase. Start browsing at: store.danfoss.com.



Danfoss Partner Portal/Product Data tool

Designed to support you with easy access to product data extracts, essential resources, tools, and information. The Partner Portal provides a centralized hub for product documentation, training materials, marketing assets, and technical support, ensuring you have everything you need to succeed and grow your business with Danfoss. The Partner Portal is available 24/7 at: partner.danfoss.com and is ready to support your business.



Find technical documentation

Find technical documentation you need to get your project up running. Get direct access to our official collection of data sheets, certificates and declarations, manuals and guides, 3D models and drawings, case stories, brochures, and much more. Start searching now at: documentation.danfoss.com.



Danfoss Learning

Danfoss Learning is a free online learning platform. It features courses and materials specifically designed to help engineers, installers, service technicians, and wholesalers better understand the products, applications industry topics, and trends that will help you do your job better. Find your local Danfoss website here: learning.danfoss.com.



Get local information and support

Local Danfoss websites are the main sources for help and information about our company and products. Find product availability, get the latest regional news, or connect with a nearby expert - all in your own language. Find your local Danfoss website here: danfoss.com.

Danfoss A/S

Climate Solutions . danfoss.com . +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues description, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the products. All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.
