




SPIT HIT M

Elforsinket med senkhode

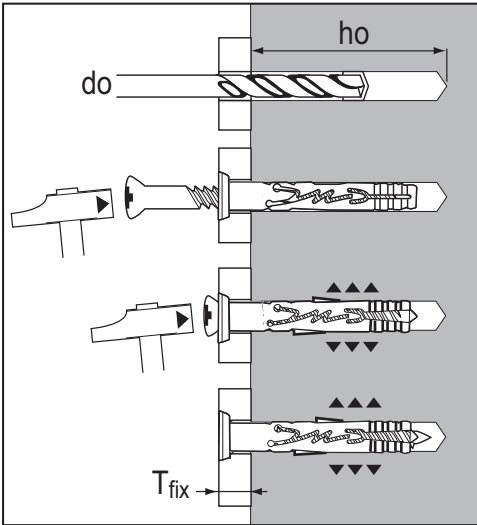

Bruksområde: feste av el artikler, trelister, isolasjon, stålprofiler, mm.

Hvor kan den brukes	Hva kan den bære (belastning)	Hvordan skal den monteres																								
   	Maks. anbefalt belastning: Uttrekks last v. min montasjedybde  <table><tr><td>0,32 kN</td><td>0,32 kN</td><td>0,42 kN</td><td>0,42 kN</td></tr><tr><td>Ø6</td><td>Ø6</td><td>Ø8</td><td>Ø8</td></tr><tr><td>L ≤ 52 mm</td><td>L > 52 mm</td><td>L ≤ 92 mm</td><td>L > 92 mm</td></tr></table> Maks. anbefalt belastning: Skjær last  <table><tr><td>0,75 kN</td><td>0,60 kN</td><td>1,15 kN</td><td>0,95 kN</td></tr><tr><td>Ø6</td><td>Ø6</td><td>Ø8</td><td>Ø8</td></tr><tr><td>L ≤ 52 mm</td><td>L > 52 mm</td><td>L ≤ 92 mm</td><td>L > 92 mm</td></tr></table>	0,32 kN	0,32 kN	0,42 kN	0,42 kN	Ø6	Ø6	Ø8	Ø8	L ≤ 52 mm	L > 52 mm	L ≤ 92 mm	L > 92 mm	0,75 kN	0,60 kN	1,15 kN	0,95 kN	Ø6	Ø6	Ø8	Ø8	L ≤ 52 mm	L > 52 mm	L ≤ 92 mm	L > 92 mm	
0,32 kN	0,32 kN	0,42 kN	0,42 kN																							
Ø6	Ø6	Ø8	Ø8																							
L ≤ 52 mm	L > 52 mm	L ≤ 92 mm	L > 92 mm																							
0,75 kN	0,60 kN	1,15 kN	0,95 kN																							
Ø6	Ø6	Ø8	Ø8																							
L ≤ 52 mm	L > 52 mm	L ≤ 92 mm	L > 92 mm																							

Anbefalt maks. belastningsverdier: i betong 20 mPa

(1 kN ~ 100 kg)

Dim.	Bor diameter do	Boredybde mm ho*	Uttreks last N rec - kN	Skjær last V rec - kN	Min. innv. avst., mm	Min kantavst. C min
Ø6					Tæt på kant	N / V
L ≤ 52	6	35	0,32	0,75	25 / 70	25 / 45
L > 52	6	35	0,32	0,60	25 / 70	25 / 45
Ø8						
L ≤ 92	8	40	0,42	1,15	25 / 90	25 / 45
L > 92	8	40	0,42	0,95	25 / 90	25 / 45

*) ho + emnetykkelse

Sortiment

Best.nr.	NOBB nr.	Dimensjon mm	Antall
050129	30254221	6 x 12/39	100
050131	30254239	6 x 25/52	100
050132	30254247	6 x 40/67	100
050134	30254254	8 x 30/62	100
050135	30254262	8 x 60/92	100
050136	30254270	8 x 80/112	100
050137	30254288	8 x 100/132	100

6 x 12 / 39

