LANRACK

19'' rack 42HE H2080xB600xD1000mm DPPD sort LRG-800



Anvendelse

19" Gulvrack for data og server installatoner. Leveres med 19" opspænding for og bag. 19": Electrosteel (ledende). Aflåselige sideplader. Perforerede døre for og bag, sikrer optimal ventilation. Aftagelig fordør, som kan højre/venstre vendes. Dobbelt perforerede døre bag. Forberedt for ventilation. Topplade med 3 kabelindgange. Bundplade med gæller og kabelindgang for og bag. Leveres med hjul og niveler fødder.

Specifikation

Materiale: Pulverlakeret stål. 1,5 mm

Farve: Sort

Dør: Dobbelt perforeret pladedør

Lås: 1 punkt vridergreb Eurolock
Forberedt for: Ruko

Opspænding: 19" for og bag.
Electrosteel (ledende)

Størrelse: H2080xB600xD1000 mm

HE: 42HE

Max belastning: 800 kg

Jording: Forberedt for jord
(kobberstag)

Tilbehørs program: Stort

Leveres samlet


Hjul: 4 stk. nylon

Fødder: 4 stk. nivelerbare

Vare-nr.: 244030
EANnr.: 5706683015076


LANRACK

19’’ rack 42HE H2080xB600xD1000mm DPPD sort LRG-800

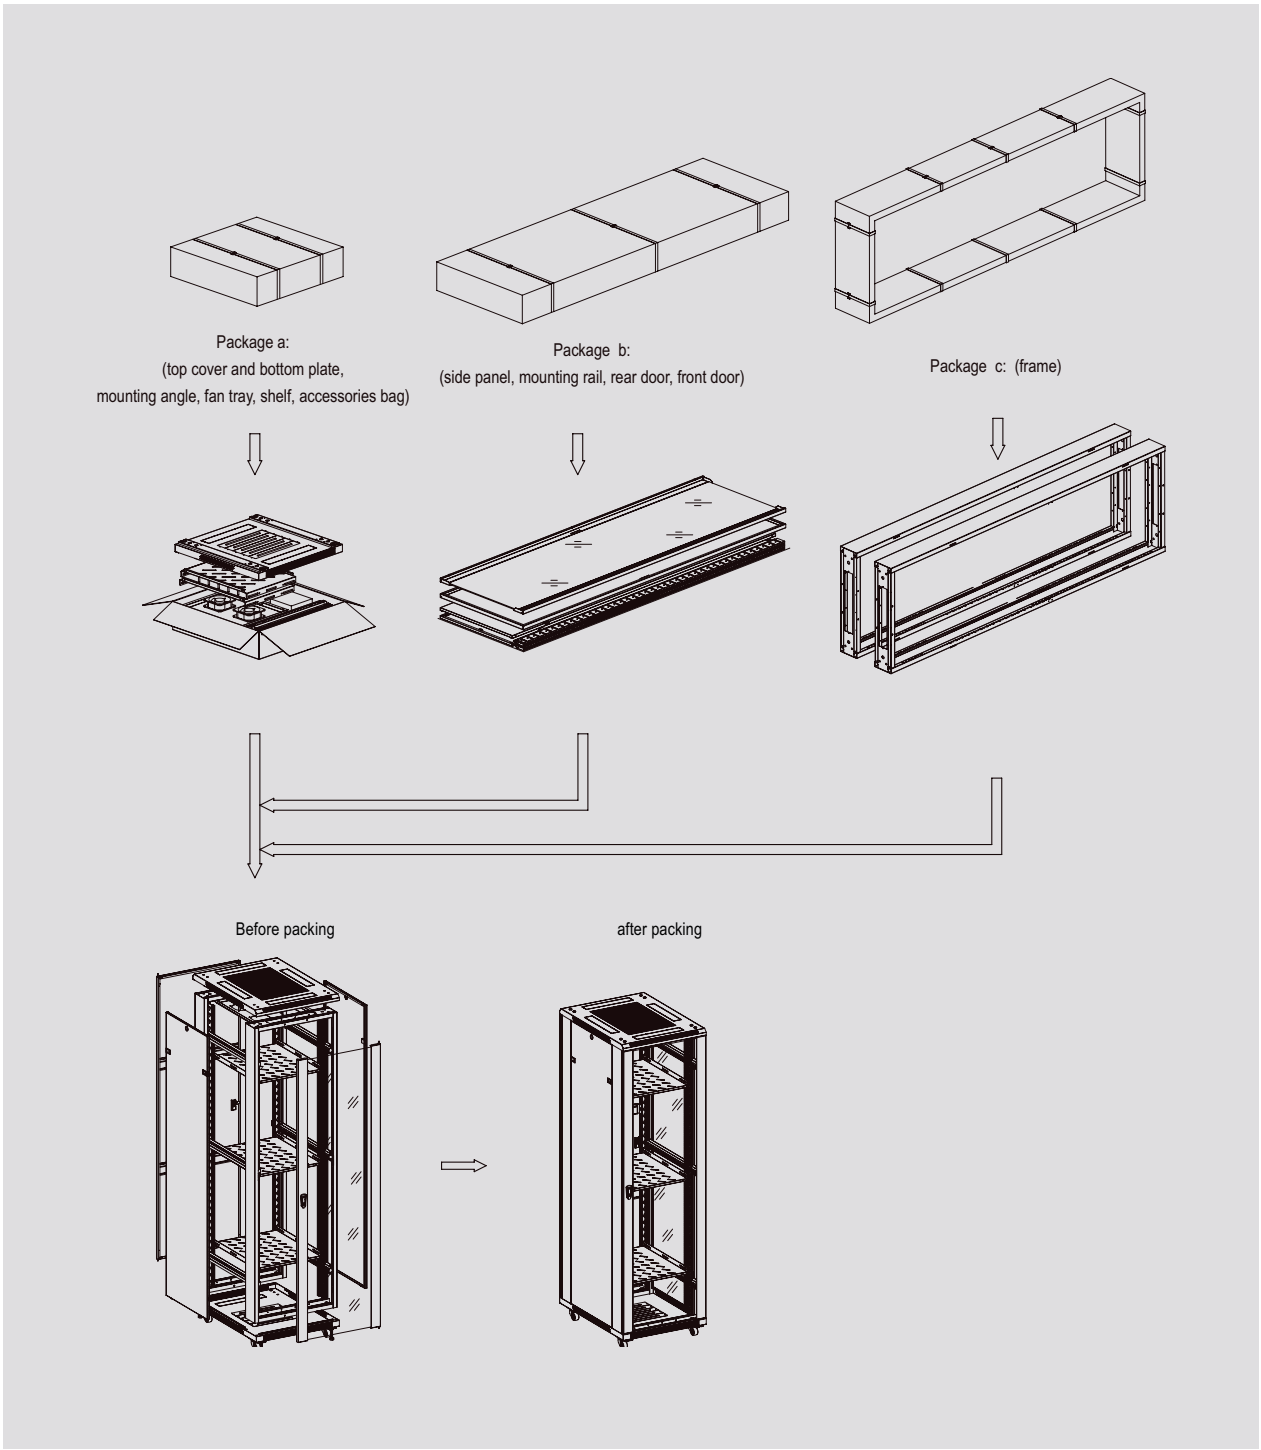

LANRACK


19” rack 42HE H2080xB600xD1000mm DPPD sort LRG-800

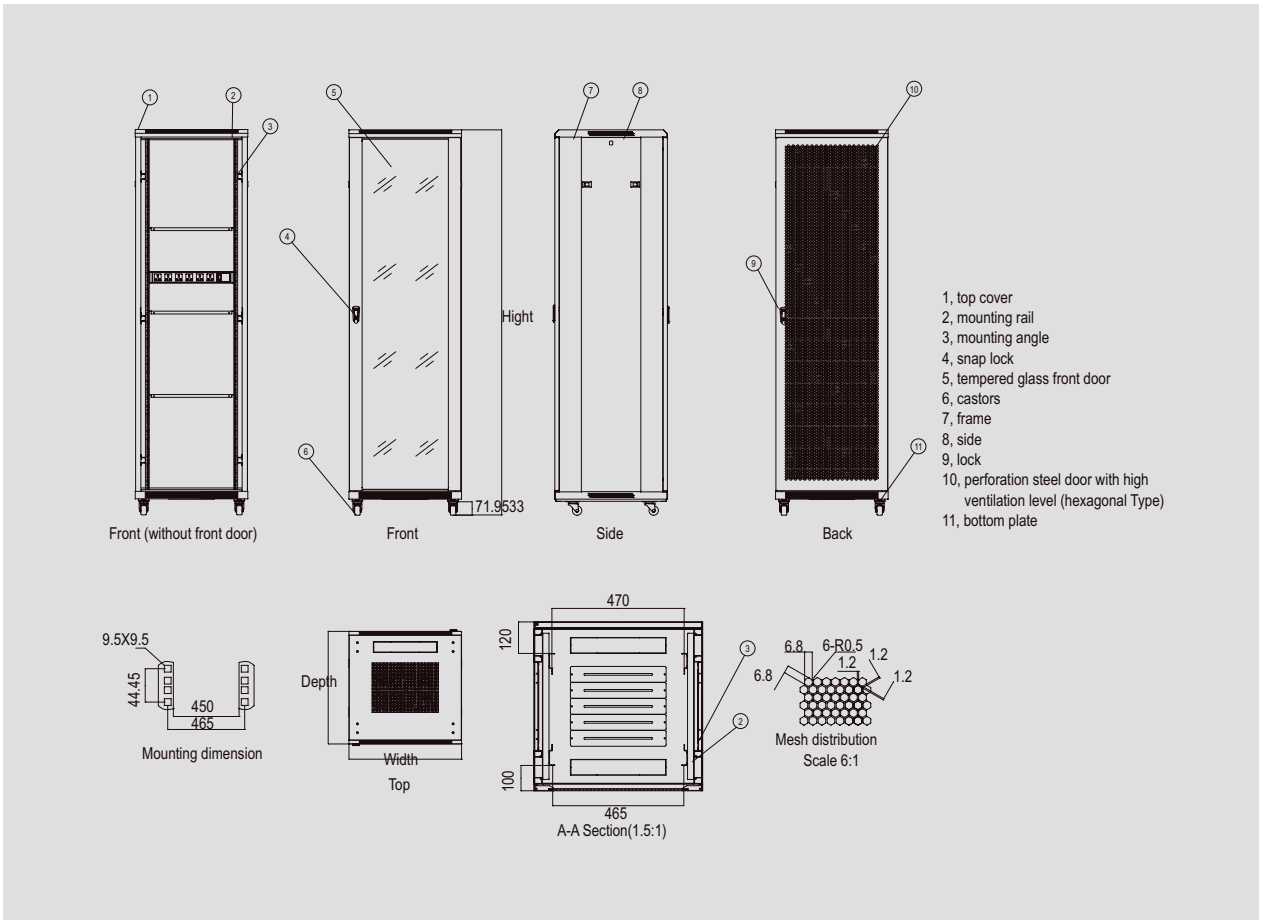

S/N	Specification	Qty	Unit	Material	Surface Finish	Remark
1	Top cover	1	Pcs	1.2mm cold rolled steel	Powder coated	-
2	Rack	2	Pcs	1.2mm cold rolled steel	Powder coated	-
3	Front door	1	Pcs	1.2mm cold rolled steel	Powder coated	type door
4	Side panel	4	Pcs	1.2mm cold rolled steel	Powder coated	With lock
5	Left rear door	1	Pcs	1.2mm cold rolled steel	Powder coated	A type door
6	Lock	1	Pcs	-	-	-
7	Mounting rail	6	Pcs	2.0mm cold rolled steel	Powder coated	-
8	Mounting angle	4	Pcs	1.2mm cold rolled steel	Powder coated	-
9	Bottom plate	6	Pcs	1.2mm cold rolled steel	Powder coated	-
10	Spacer	2	Pcs	-	-	Width 800mm
11	Fixed shelf	1	Pcs	1.2mm cold rolled steel	Powder coated	20pcs under 32u, 1pcs under 22u
12	Castors	4	Pcs	-	-	-
13	Feet	4	Pcs	-	-	-
14	Cage and nuts	40	sets	-	-	20pcs under 32u
15	Fan	4	Pcs	-	-	2 fans for 600mm depth
16	6way power strip	1	Pcs	-	-	-
17	Wrench	1	Pcs	-	-	-

LANRACK

19'' rack 42HE H2080xB600xD1000mm DPPD sort LRG-800

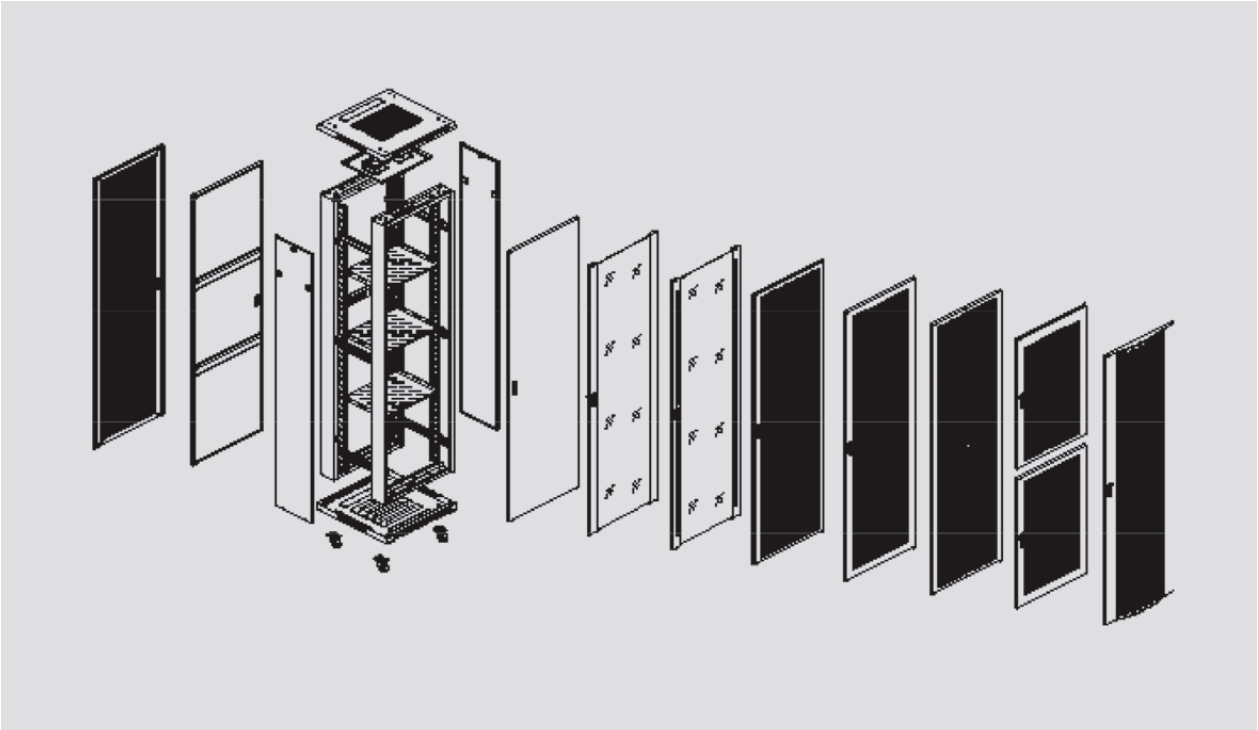

Standard

Comply with ANSI/EIARS-310-D, DIN41491; PART1, IEC297-2, DIN41494; PART7, GB/T3047.2-92 standard. Compatible with metric ETSI and 19 inch international standard.

Features

- Exquisite design with precise craftsmanship
- Good compatibility, adapt to more servers. Perfect ventilation
- Vented front door and rear door enable ventilation and reliable operation
- The top and bottom wiring channel can be closed and adjusted
- Optional plinth to meet under base wiring, ventilation and rat-proof
- Rack's side panel can be easily assembled
- Efficient and solid cabinet connection
- Adjustable feet and heavy duty castors are available at the same time , static loading: 800kg.(with adjustable feet)
- Advanced lock
- Surface finish: degreasing, pickling, phosphating, powder coating Available in black and gray
- Height, width, and depth selectable, full range of optional accessories.

Materials

Cold-rolled steel sheet. Thickness for frame 1.2mm, mounting rail 2.0mm(1.5mm for 600mm depth cabinet), fixed shelf 1.2mm , side panel 1.2mm. Thickness for smoky grey glass 5mm.

Application

Widely applied in finance, securities and data center; adopted by the professional servers' network providers as IBM, SUN, HP, COMPAQ, DELL etc.

LAN-COM
Intelligent datakabling

Hassellunden 7
2765 Smørum
Telefon: 44 57 07 87
E-mail: lan-com@lan-com.dk