MPO/F/APC-MPO/F/APC 12 fiber kabel 120 m OS2 med ekstra LSZH kappe Method A



Anvendelse

Anvendes som fiberbackbone i datainstallationer mellem krydsfelter eller i Datacentre mellem krydsfelter.
Leveres færdigtemineret klar til brug - et meget tidsbesparende produkt.
Samt med trækøje strømpe for beskyttelse af kablet under installation.


Specifikation

Fiber: OS2 9/125µ
Antal fibre: 12 stk.
Loss: Low Loss < 0,35dB
Methode: A
Ende A: MPO/F/APC
Ende B: MPO/F/APC
Kappe matriale: LSZH
Kappe farve: Gul
Trækøjs strømpe: Nylon
Længde: 120 mtr.
Fabrikant: Lan-Optic
Pakning: 1 stk.


Varenr.: 235541
EANnr.: 5706683028977

MPO/F/APC-MPO/F/APC 12 fiber kabel 120 m OS2 med ekstra LSZH kappe Method A


Description: MPOAPC(F) to MPOAPC(F) SM 12 Cores 3.0mm Optical Fiber Patch Cord.

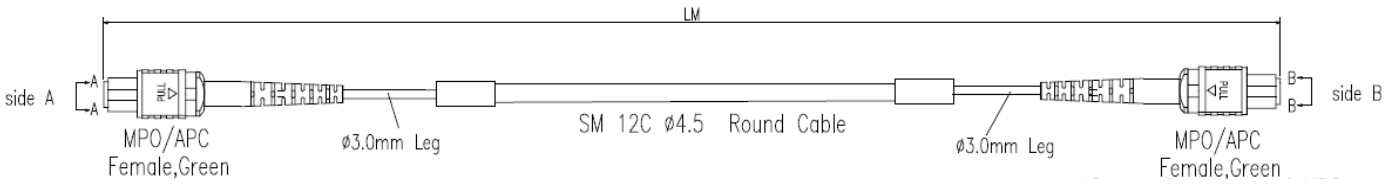

12cores fiber color of MPO connector




A–A

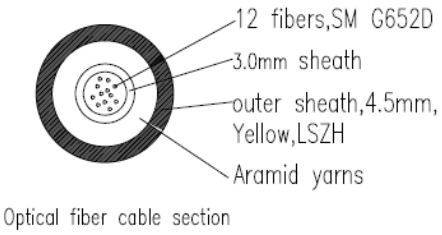

Optical fiber cable section

12cores fiber color of MPO connector





B–B

Techenical requirements:

1.Performance Index:
MPO:IL≤0.7dB,RL≥60dB@1310nm;
2.NO dust cap showing on the drawing.
3.Polarity:A.
4.ROHS Compliant.

side A



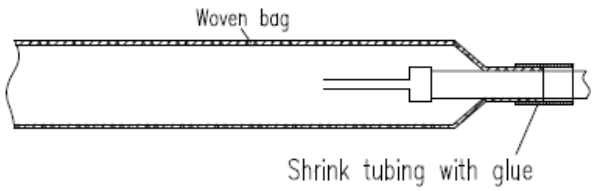

LENGTH(L)	TOLERANCE
L≤1M	+50mm/0
1M<L≤3M	+100mm/0
3M<L≤10M	±100mm
10M<L≤30M	±150mm
L>30M	±200mm

LAN-COM
Intelligent datakabling

Hasellunden 7
2765 Smørum
Telefon 44 57 07 87
Email: lan-com@lan-com.dk