# MPO/F/APC-MPO/F/APC 12 fiber kabel 130 m OS2 med ekstra LSZH kappe Method A



## Anvendelse

Anvendes som fiberbackbone i datainstallationer mellem krydsfelter eller i Datacentre mellem krydsfelter.
Leveres færdigtemineret klar til brug - et meget tidsbesparende produkt.
Samt med trækøje strømpe for beskyttelse af kablet under installation.


## Specifikation

Fiber: OS2 9/125µ
Antal fibre: 12 stk.
Loss: Low Loss < 0,35dB
Methode: A
Ende A: MPO/F/APC
Ende B: MPO/F/APC
Kappe matriale: LSZH
Kappe farve: Gul
Trækøjs strømpe: Nylon
Længde: 130 mtr.
Fabrikant: Lan-Optic
Pakning: 1 stk.


**Varenr.:** 235544
**EANnr.:** 5706683028984

# MPO/F/APC-MPO/F/APC 12 fiber kabel 130 m OS2 med ekstra LSZH kappe Method A


Description: MPOAPC(F) to MPOAPC(F) SM 12 Cores 3.0mm Optical Fiber Patch Cord.

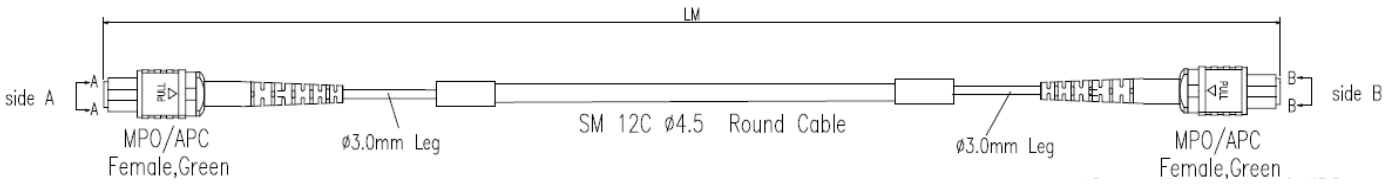


12cores fiber color of MPO connector





A–A

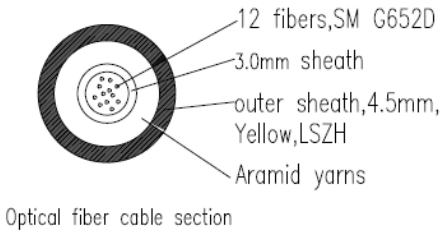


Optical fiber cable section

12cores fiber color of MPO connector






B–B

Techenical requirements:

1.Performance Index:
MPO:IL≤0.7dB,RL≥60dB@1310nm;
2.NO dust cap showing on the drawing.
3.Polarity:A.
4.ROHS Compliant.

side A



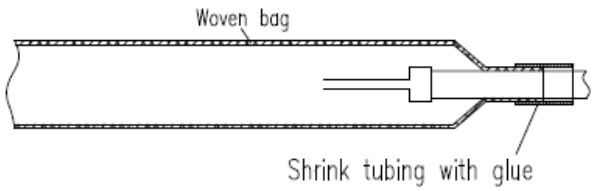
| LENGTH(L) | TOLERANCE |
|---|---|
| L≤1M | +50mm/0 |
| 1M<L≤3M | +100mm/0 |
| 3M<L≤10M | ±100mm |
| 10M<L≤30M | ±150mm |
| L>30M | ±200mm |


LAN-COM
Intelligent datakabling

Hasellunden 7
2765 Smørum
Telefon 44 57 07 87
Email: lan-com@lan-com.dk