

The **cast malleable iron compression fittings**

O + OF


gebo[®]
ORIGINAL

Dimensions and weights


DN	Steel pipe		Black steel pipe		PE pipe		Installation length ~A [mm]	Wrench size or dimension Flange cover ~SW [mm]	Corner dimension ~e [mm]	Depth of insertion min. max. [mm]	
	Pipe Outer-Ø [mm]	Weight [kg]	Pipe Outer-Ø [mm]	Weight [kg]	Pipe Outer-Ø [mm]	Weight [kg]					
10	17.2	0.2					85	31.5	34	25	35
15	21.3	0.4	20.0	0.5	20.0	0.5	120	41	44	30	50
20	26.9	0.7	25.0	0.7	25.0	0.7	120	50	54	30	50
25	33.7	0.8	31.8	0.8	32.0	0.8	120	55	60	35	50
32	42.4	1.3	44.5	1.1	40.0	1.3	130	70	76	40	55
40	48.3	1.5	51.0	1.3	50.0	1.5	130	75	81	40	55
50	60.3	2.2	57.0	2.4	63.0	2.2	145	90	97	40	65
			63.5	2.3			145	90	97	40	65
65	76.1	5.1	70.0	5.5	75.0	5.1	190	100	150	50	75
80	88.9	6.8			90.0	6.0	190	120	160	50	85
100	114.3	7.6	108.0	7.7	110.0	7.6	190	135	185	50	85

Compression fitting for **steel pipe** and **black steel pipe**

17.2 mm–60.3 mm and 20 mm–63.5 mm

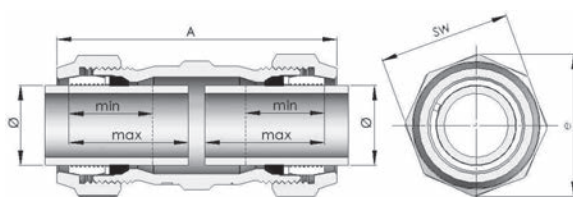


76.1 mm–114.3 mm and 70 mm–108 mm

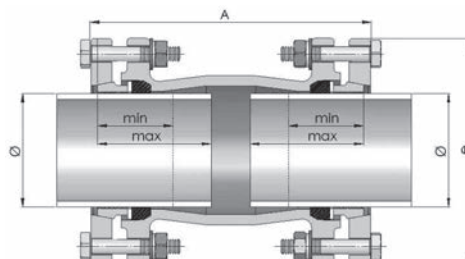

Compression fitting for **PE pipe incl. support sleeve**

20 mm–63 mm

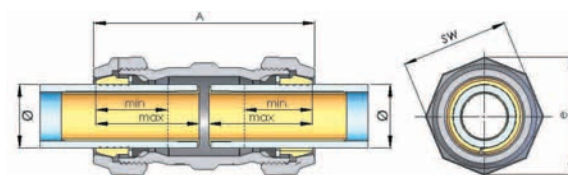

75 mm–110 mm

