PAY-OFF


FOR SPOOLS AND BUNDLES

ASC100


100 kg pay-off with safety perimeter guards
Aspo svolgitore da 100 kg con barriere di protezione
Desenrollador de 100 kg con barreras de protección

AVAILABLE MODELS	ASC100-08-G1
Features Caratteristiche Características	• Reduced dimensions
Recommended for wire Raccomandato per filo Recomendado para hilo	ø 0,1 ÷ 0,8 mm (ø .004 ÷ .03")
Capacity Capacità di carico Capacidad de carga	100 kg (220 lb)
ø Plate ø Piatto ø Plato	ø 800 mm with / without 15 mm border* (ø 31.5" - .6")
Plate orientation Orientamento del piatto Orientación del plato	Horizontal
Inside bundle diameter Diametro interno matassa Diámetro interior madeja	ø 215 ÷ 600 mm (ø 8.4 ÷ 23.6")
Max speed Velocità max Velocidad máxima	120 rpm
Guards features Caratteristiche barriere Caracteristicas barreras	• Fixing to the ground is not mandatory


***PLATE WITH / WITHOUT 15 MM BORDER**

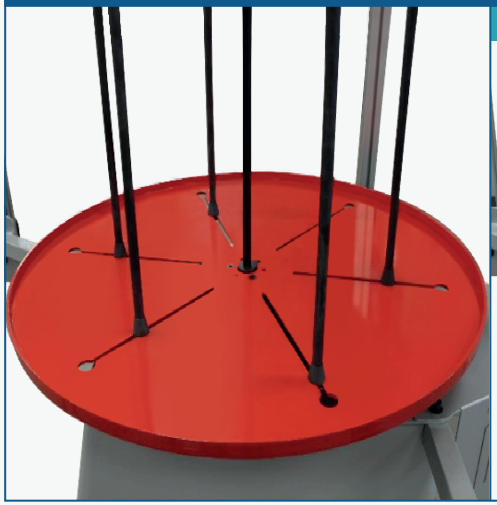

UPSIDE DOWN

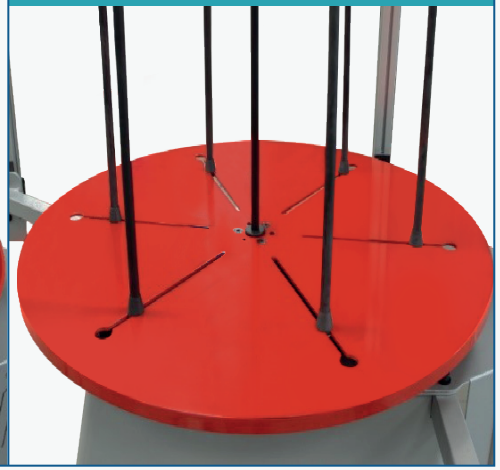

ASC100

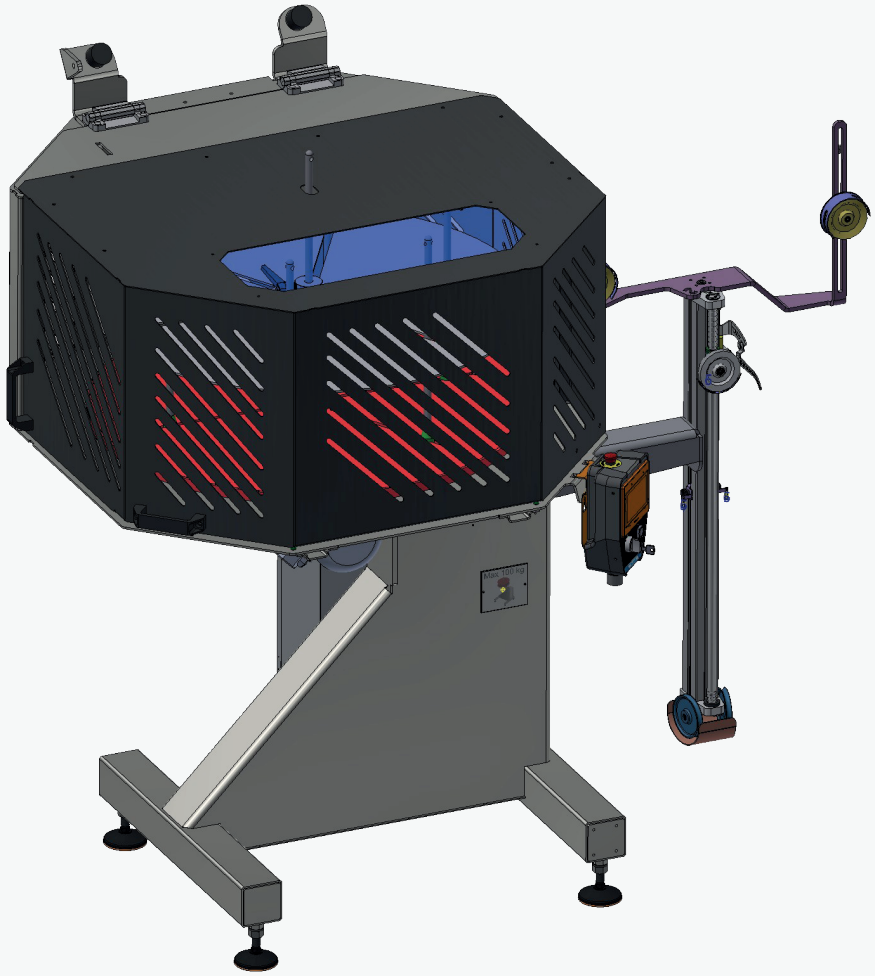


MicroStudio
MADE IN ITALY


It is strongly recommended to do not remove or tamper the safety perimeter guards from the pay-off. MicroStudio does not assume any responsibility for an incorrect installations of the various necessary safety measures.


ASC100-08-G1

CONFIGURATION A

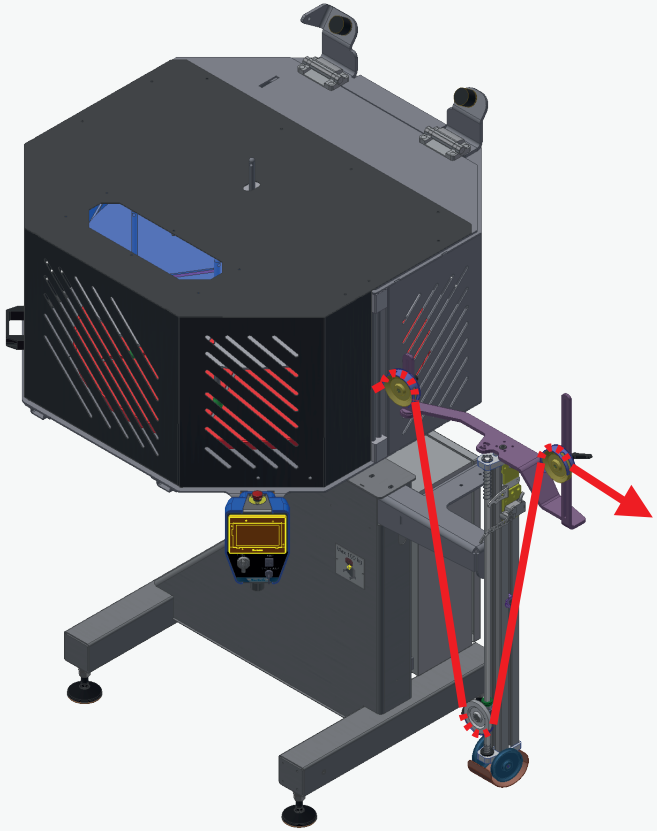

CONFIGURATION B: SPACE-SAVING

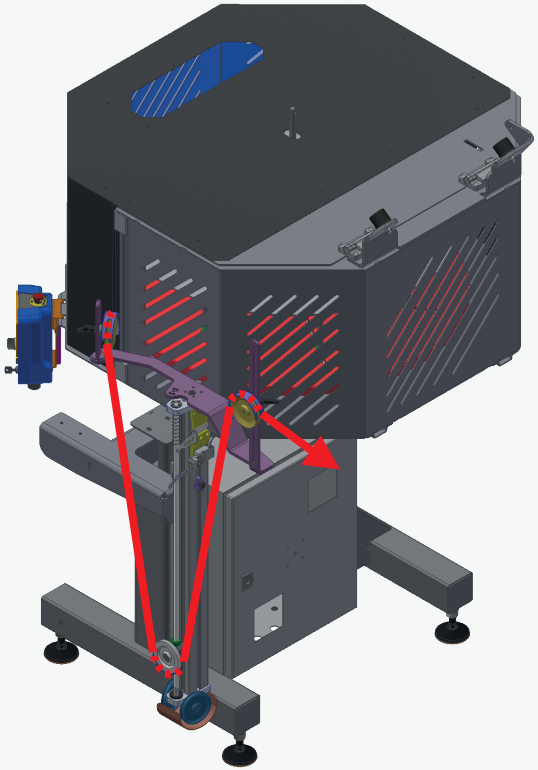

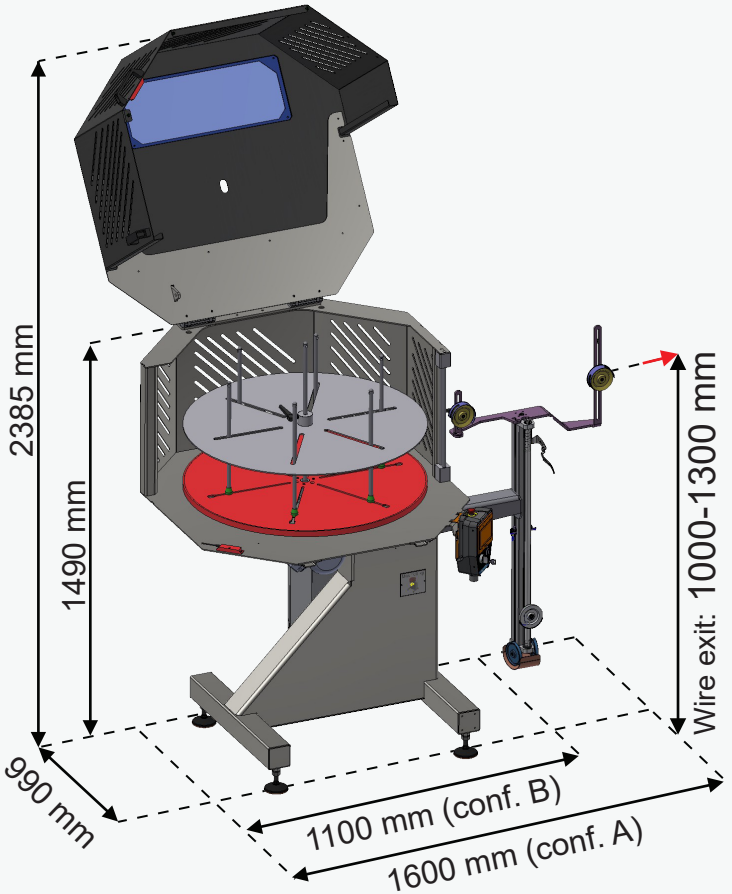

It is strongly recommended to do not remove or tamper the safety perimeter guards from the pay-off. MicroStudio does not assume any responsibility for an incorrect installations of the various necessary safety measures.