


FC + 4 x 26 Tensile strenght 1.960 N/mm²



Rope Ø mm.	Construction	Diam. Out. Wire mm.	Weight Kg/mt
8,4	AT+ 4x26 WS	0,63	0,260
11,6	AT+ 4x26 WS	1,02	0,530
16,3*	AT+ 4x36 WS	1,05	1,040


*FC + 4 x 36

FC + 5 x 26 WS compacted with polypropylene core



Rope Ø mm.	Diam. Out. Wire mm.	Min. Breaking Load kgf.	Weight Kg./mt
8,4	0,67	5.250	0,250
9,5	0,75	6.809	0,340
10,2	0,83	8.461	0,390
11,5	0,93	9.531	0,480
14,0	1,15	16.004	0,740
16,3*	1,15	19.776	1,010

*FC + 5 x 31 WS compacted with polypropylene core

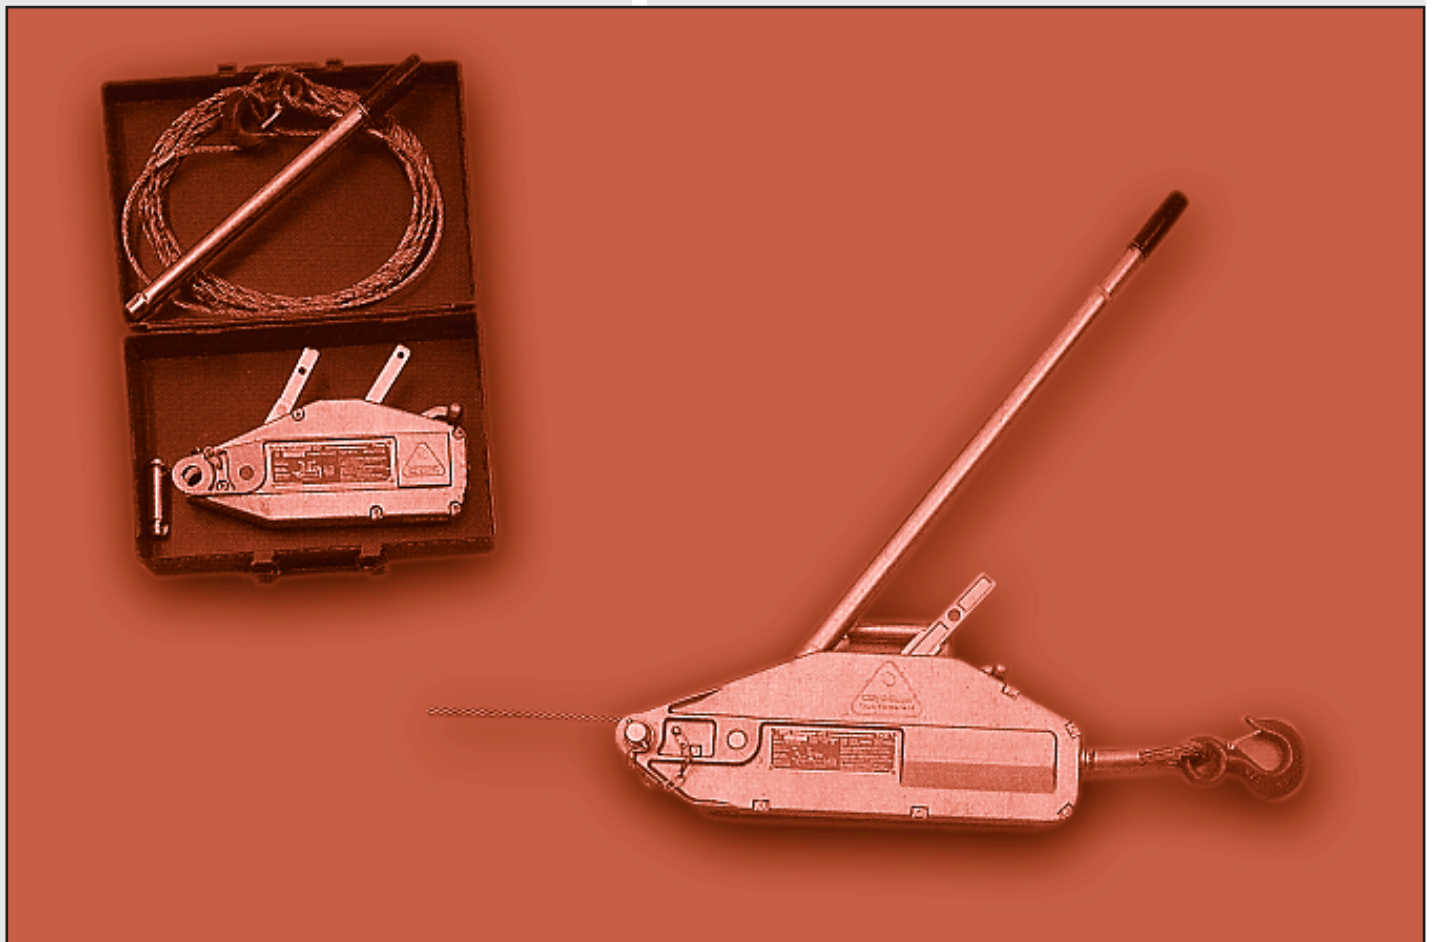

FOLLOWING CLIENT'S NEEDS, REMER IS ABLE TO PRODUCE THE OVER - DISPLAYED WIRE ROPES IN ALL REQUESTED DIAMETERS.