

1 x 7 + 34 x 7W avec âme plastifiée



| Câble Ø. mm. | Fils ext. Ø mm. | Section métal. mm ² | Charge de rupture kg/F | | | Poids Kg./mt |
|--------------|-----------------|--------------------------------|------------------------|------------------------|------------------------|--------------|
| | | | 200 kg/mm ² | 220 kg/mm ² | 240 kg/mm ² | |
| 8 | 0,40 | 30,25 | 4.790 | 5.269 | 5.748 | 0,293 |
| 10 | 0,50 | 47,27 | 7.490 | 8.239 | 8.988 | 0,458 |
| 11 | 0,55 | 57,20 | 9.060 | 9.966 | 10.872 | 0,558 |
| 12 | 0,60 | 68,07 | 10.810 | 11.891 | 12.972 | 0,670 |
| 13 | 0,65 | 79,89 | 12.640 | 13.904 | 15.168 | 0,783 |
| 14 | 0,70 | 92,65 | 14.480 | 15.928 | 17.376 | 0,908 |
| 15 | 0,75 | 106,36 | 16.820 | 18.502 | 20.184 | 1,036 |
| 16 | 0,80 | 121,01 | 19.160 | 21.076 | 22.992 | 1,180 |
| 17 | 0,85 | 136,61 | 21.610 | 23.771 | 25.932 | 1,320 |
| 18 | 0,90 | 153,15 | 24.260 | 26.686 | 29.112 | 1,491 |
| 19 | 0,95 | 170,64 | 27.010 | 29.711 | 32.412 | 1,653 |
| 20 | 1,00 | 189,08 | 28.960 | 31.856 | 34.752 | 1,835 |
| 22 | 1,10 | 228,79 | 36.280 | 39.908 | 43.536 | 2,221 |
| 24 | 1,20 | 272,28 | 43.110 | 47.421 | 51.732 | 2,680 |
| 25 | 1,25 | 295,44 | 46.780 | 51.458 | 56.136 | 2,846 |
| 26 | 1,30 | 319,55 | 50.650 | 55.715 | 60.780 | 3,132 |
| 28 | 1,40 | 370,60 | 58.700 | 64.570 | 70.440 | 3,635 |
| 30 | 1,50 | 425,43 | 67.460 | 74.206 | 80.952 | 4,141 |
| 32 | 1,60 | 484,04 | 76.740 | 84.414 | 92.088 | 4,721 |
| 34 | 1,70 | 546,44 | 86.620 | 95.282 | 103.944 | 5,301 |
| 36 | 1,80 | 612,72 | 97.120 | 106.832 | 116.544 | 5,936 |
| 38 | 1,90 | 682,58 | 108.020 | 118.822 | 129.624 | 6,591 |

1 x 7 + 18 x 7 avec âme plastifiée




| Câble Ø. mm. | Fils ext. Ø mm. | Section métal. mm ² | Charge de rupture kg/F | | | Poids Kg./mt |
|--------------|-----------------|--------------------------------|------------------------|------------------------|------------------------|--------------|
| | | | 180 kg/mm ² | 200 kg/mm ² | 220 kg/mm ² | |
| 8 | 0,50 | 24,70 | 3.780 | 4.200 | 4.620 | 0,276 |
| 9 | 0,58 | 35,00 | 4.784 | 5.315 | 5.847 | 0,349 |
| 10 | 0,65 | 41,70 | 5.906 | 6.562 | 7.218 | 0,431 |
| 11 | 0,70 | 48,50 | 7.146 | 7.940 | 8.734 | 0,522 |
| 12 | 0,80 | 63,20 | 8.504 | 9.449 | 10.394 | 0,621 |
| 13 | 0,85 | 71,40 | 9.981 | 11.090 | 12.199 | 0,729 |
| 14 | 0,90 | 80,00 | 11.575 | 12.862 | 14.148 | 0,845 |
| 16 | 1,05 | 109,10 | 15.119 | 16.799 | 18.479 | 1,104 |
| 18 | 1,15 | 142,90 | 19.135 | 21.261 | 23.387 | 1,397 |
| 20 | 1,30 | 167,20 | 23.623 | 26.248 | 28.873 | 1,725 |
| 22 | 1,45 | 208,00 | 28.584 | 31.760 | 34.936 | 2,087 |
| 24 | 1,55 | 253,00 | 34.017 | 37.797 | 41.577 | 2,484 |
| 26 | 1,70 | 301,00 | 39.923 | 44.359 | 48.795 | 2,915 |
| 28 | 1,80 | 338,00 | 46.301 | 51.446 | 56.591 | 3,381 |
| 30 | 1,93 | 388,80 | 53.152 | 59.058 | 64.964 | 3,881 |

AM + 6 x 36 WS avec âme plastifiée




| Câble Ø. mm. | Fils ext. Ø mm. | Section métal. mm ² | Charge de rupture kg/F | | | Poids Kg./mt |
|--------------|-----------------|--------------------------------|------------------------|------------------------|------------------------|--------------|
| | | | 180 kg/mm ² | 200 kg/mm ² | 220 kg/mm ² | |
| 16 | 0,96 | 133,76 | 18.060 | 20.067 | 22.073 | 1,252 |
| 18 | 1,09 | 169,29 | 22.857 | 25.397 | 27.937 | 1,585 |
| 20 | 1,20 | 209,00 | 28.219 | 31.354 | 34.490 | 1,956 |
| 22 | 1,32 | 252,89 | 34.145 | 37.939 | 41.733 | 2,367 |
| 24 | 1,44 | 300,96 | 40.635 | 45.150 | 49.665 | 2,817 |
| 26 | 1,56 | 353,21 | 47.690 | 52.989 | 58.288 | 3,306 |
| 28 | 1,68 | 409,64 | 55.309 | 61.455 | 67.600 | 3,834 |
| 30 | 1,80 | 470,25 | 63.493 | 70.547 | 77.602 | 4,400 |
| 32 | 1,92 | 535,04 | 72.241 | 80.267 | 88.294 | 5,000 |
| 34 | 2,04 | 604,01 | 81.553 | 90.614 | 99.676 | 5,650 |
| 36 | 2,16 | 677,16 | 91.429 | 101.588 | 111.747 | 6,340 |
| 38 | 2,28 | 754,49 | 101.870 | 113.189 | 124.508 | 7,060 |
| 40 | 2,40 | 836,00 | 112.876 | 125.418 | 137.959 | 7,830 |
| 42 | 2,52 | 921,69 | 124.446 | 138.273 | 152.100 | 8,630 |
| 44 | 2,64 | 1.011,56 | 136.580 | 151.755 | 166.931 | 9,470 |

AM + 8 x 36 WS avec âme plastifiée




| Câble Ø. mm. | Fils ext. Ø mm. | Section métal. mm ² | Charge de rupture kg/F | | | Poids Kg./mt |
|--------------|-----------------|--------------------------------|------------------------|------------------------|------------------------|--------------|
| | | | 180 kg/mm ² | 200 kg/mm ² | 220 kg/mm ² | |
| 10 | 0,46 | 47,03 | 6.418 | 7.132 | 7.845 | 0,438 |
| 11 | 0,51 | 56,90 | 7.766 | 8.629 | 9.492 | 0,529 |
| 12 | 0,56 | 67,72 | 9.242 | 10.269 | 11.296 | 0,630 |
| 13 | 0,60 | 79,48 | 10.847 | 12.052 | 13.257 | 0,739 |
| 14 | 0,65 | 92,17 | 12.580 | 13.978 | 15.376 | 0,858 |
| 16 | 0,74 | 120,39 | 16.431 | 18.257 | 20.082 | 1,120 |
| 18 | 0,83 | 152,37 | 20.795 | 23.106 | 25.417 | 1,418 |
| 20 | 0,93 | 188,11 | 25.673 | 28.526 | 31.379 | 1,750 |
| 22 | 1,02 | 227,61 | 31.065 | 34.517 | 37.968 | 2,118 |
| 24 | 1,11 | 270,88 | 36.970 | 41.078 | 45.185 | 2,520 |
| 26 | 1,20 | 317,90 | 43.388 | 48.209 | 53.030 | 2,958 |
| 28 | 1,30 | 368,69 | 50.320 | 55.911 | 61.502 | 3,430 |
| 30 | 1,39 | 423,24 | 57.765 | 64.184 | 70.602 | 3,938 |
| 32 | 1,48 | 481,56 | 65.724 | 73.027 | 80.329 | 4,480 |
| 34 | 1,57 | 543,63 | 74.196 | 82.440 | 90.684 | 5,058 |
| 36 | 1,67 | 609,47 | 83.182 | 92.424 | 101.667 | 5,670 |
| 38 | 1,76 | 679,07 | 92.681 | 102.979 | 113.277 | 6,318 |
| 40 | 1,85 | 752,43 | 102.694 | 114.104 | 125.515 | 7,000 |
| 42 | 1,94 | 829,55 | 113.220 | 125.800 | 138.380 | 7,718 |
| 44 | 2,04 | 910,44 | 124.259 | 138.066 | 151.873 | 8,470 |
| 46 | 2,13 | 995,09 | 135.813 | 150.903 | 165.993 | 9,258 |
| 48 | 2,22 | 1.083,50 | 147.879 | 164.310 | 180.741 | 10,080 |

LA MAISON REMER PEUT PRODUIRE LES CABLES CI-ILLUSTRES DANS LES DIAMETRES DEMANDES PAR LE CLIENT.

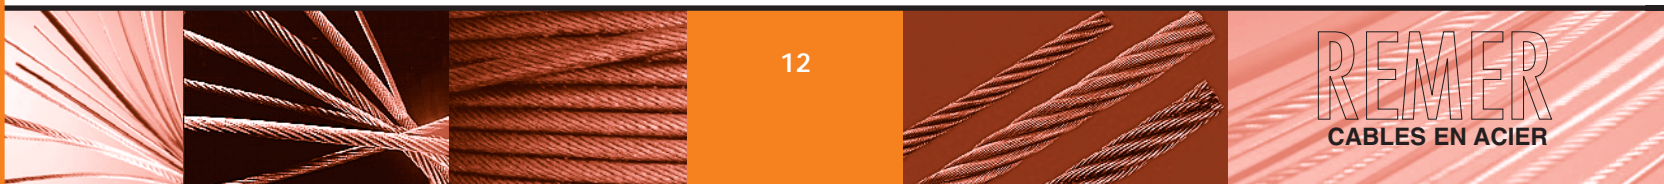


AM + 6x36WS tréfilé avec âme plastifiée



| Câble Ø. mm. | Fils ext. Ø mm. | Section métal. mm ² | Charge de rupture kg/F | | | Poids Kg./mt |
|--------------------|-----------------------|--------------------------------------|---------------------------|---------------------------|---------------------------|-----------------|
| | | | 180 kg/mm ² | 200 kg/mm ² | 220 kg/mm ² | |
| 16 | 0,96 | 133,76 | 18.060 | 20.067 | 22.073 | 1,252 |
| 18 | 1,09 | 169,29 | 22.857 | 25.397 | 27.937 | 1,585 |
| 20 | 1,20 | 209,00 | 28.219 | 31.354 | 34.490 | 1,956 |
| 22 | 1,32 | 252,89 | 34.145 | 37.939 | 41.733 | 2,367 |
| 24 | 1,44 | 300,96 | 40.635 | 45.150 | 49.665 | 2,817 |
| 26 | 1,56 | 353,21 | 47.690 | 52.989 | 58.288 | 3,306 |
| 28 | 1,68 | 409,64 | 55.309 | 61.455 | 67.600 | 3,834 |
| 30 | 1,80 | 470,25 | 63.493 | 70.547 | 77.602 | 4,400 |
| 32 | 1,92 | 535,04 | 72.241 | 80.267 | 88.294 | 5,000 |
| 34 | 2,04 | 604,01 | 81.553 | 90.614 | 99.676 | 5,650 |
| 36 | 2,16 | 677,16 | 91.429 | 101.588 | 111.747 | 6,340 |
| 38 | 2,28 | 754,49 | 101.870 | 113.189 | 124.508 | 7,060 |
| 40 | 2,40 | 836,00 | 112.876 | 125.418 | 137.959 | 7,830 |
| 42 | 2,52 | 921,69 | 124.446 | 138.273 | 152.100 | 8,630 |
| 44 | 2,64 | 1.011,56 | 136.580 | 151.755 | 166.931 | 9,470 |

AM + 8 X 36 WS tréfilé avec âme plastifiée




| Câble Ø. mm. | Fils ext. Ø mm. | Section métal. mm ² | Charge de rupture kg/F | | | Poids Kg./mt |
|--------------------|-----------------------|--------------------------------------|---------------------------|---------------------------|---------------------------|-----------------|
| | | | 180 kg/mm ² | 200 kg/mm ² | 220 kg/mm ² | |
| 10 | 0,49 | 51,73 | 7.060 | 7.845 | 8.629 | 0,475 |
| 11 | 0,54 | 62,59 | 8.543 | 9.492 | 10.441 | 0,575 |
| 12 | 0,60 | 74,49 | 10.167 | 11.296 | 12.426 | 0,684 |
| 13 | 0,64 | 87,43 | 11.932 | 13.257 | 14.583 | 0,803 |
| 14 | 0,69 | 101,39 | 13.838 | 15.376 | 16.913 | 0,931 |
| 16 | 0,79 | 132,43 | 18.074 | 20.082 | 22.091 | 1,216 |
| 18 | 0,88 | 167,61 | 22.875 | 25.417 | 27.958 | 1,539 |
| 20 | 0,99 | 206,92 | 28.241 | 31.379 | 34.517 | 1,900 |
| 22 | 1,09 | 250,37 | 34.171 | 37.968 | 41.765 | 2,299 |
| 24 | 1,18 | 297,97 | 40.667 | 45.185 | 49.704 | 2,736 |
| 26 | 1,28 | 349,69 | 47.727 | 53.030 | 58.333 | 3,211 |
| 28 | 1,38 | 405,56 | 55.352 | 61.502 | 67.652 | 3,724 |
| 30 | 1,48 | 465,56 | 63.542 | 70.602 | 77.662 | 4,275 |
| 32 | 1,58 | 529,72 | 72.296 | 80.329 | 88.362 | 4,864 |
| 34 | 1,67 | 597,99 | 81.616 | 90.684 | 99.753 | 5,491 |
| 36 | 1,78 | 670,42 | 91.500 | 101.667 | 111.834 | 6,156 |
| 38 | 1,87 | 746,98 | 101.949 | 113.277 | 124.605 | 6,859 |
| 40 | 1,97 | 827,67 | 112.963 | 125.515 | 138.066 | 7,600 |
| 42 | 2,07 | 912,51 | 124.542 | 138.380 | 152.218 | 8,379 |
| 44 | 2,17 | 1.001,48 | 136.685 | 151.873 | 167.060 | 9,196 |
| 46 | 2,27 | 1.094,60 | 149.394 | 165.993 | 182.592 | 10,051 |
| 48 | 2,36 | 1.191,85 | 162.667 | 180.741 | 198.815 | 10,944 |

1 x 7 + 18 x 7 tréfilé avec âme plastifiée



| Câble Ø. mm. | Fils ext. Ø mm. | Section métal. mm ² | Charge de rupture kg/F | Poids Kg./mt |
|--------------------|-----------------------|--------------------------------------|---------------------------|-----------------|
| | | | 220 kg/mm ² | |
| 8 | 0,57 | 33,90 | 6.000 | 0,305 |
| 9 | 0,64 | 42,80 | 7.600 | 0,395 |
| 10 | 0,72 | 54,10 | 9.500 | 0,491 |
| 11 | 0,78 | 63,50 | 11.300 | 0,595 |
| 12 | 0,84 | 73,70 | 13.200 | 0,691 |
| 12 | 0,87 | 79,00 | 14.100 | 0,741 |
| 13 | 0,93 | 90,30 | 16.000 | 0,823 |
| 14 | 0,99 | 102,30 | 18.500 | 0,931 |
| 15 | 1,08 | 121,80 | 21.650 | 1,130 |
| 16 | 1,14 | 135,70 | 24.000 | 1,260 |
| 17 | 1,23 | 158,00 | 27.900 | 1,460 |
| 18 | 1,29 | 173,70 | 30.500 | 1,612 |
| 20 | 1,44 | 216,50 | 38.000 | 2,003 |
| 22 | 1,58 | 260,60 | 46.000 | 2,427 |

1 x 7 + 34 x 7 W tréfilé avec âme plastifiée



| Câble Ø. mm. | Fils ext. Ø mm. | Section métal. mm ² | Charge de rupture kg/F | | | Poids Kg./mt |
|--------------------|-----------------------|--------------------------------------|---------------------------|---------------------------|---------------------------|-----------------|
| | | | 200 kg/mm ² | 220 kg/mm ² | 240 kg/mm ² | |
| 10 | 0,55 | 53,43 | 9.000 | 9.900 | 10.800 | 0,516 |
| 11 | 0,59 | 64,65 | 10.691 | 11.760 | 12.829 | 0,613 |
| 12 | 0,63 | 76,94 | 12.545 | 13.800 | 15.055 | 0,720 |
| 12,5 | 0,66 | 83,48 | 13.182 | 14.500 | 15.818 | 0,784 |
| 13 | 0,69 | 90,30 | 14.818 | 16.300 | 17.782 | 0,858 |
| 14 | 0,75 | 104,72 | 17.273 | 19.000 | 20.727 | 1,011 |
| 15 | 0,81 | 120,22 | 19.727 | 21.700 | 23.673 | 1,155 |
| 16 | 0,87 | 136,78 | 22.727 | 25.000 | 27.273 | 1,330 |
| 17 | 0,92 | 154,41 | 24.909 | 27.400 | 29.891 | 1,455 |
| 18 | 0,97 | 173,11 | 28.727 | 31.600 | 34.473 | 1,661 |
| 19 | 1,02 | 192,88 | 31.636 | 34.800 | 37.964 | 1,818 |
| 20 | 1,08 | 213,72 | 34.909 | 38.400 | 41.891 | 2,035 |
| 22 | 1,20 | 258,60 | 43.182 | 47.500 | 51.818 | 2,491 |
| 24 | 1,29 | 307,76 | 49.909 | 54.900 | 59.891 | 2,880 |
| 25 | 1,35 | 333,94 | 54.000 | 59.400 | 64.800 | 3,155 |
| 26 | 1,41 | 361,19 | 58.727 | 64.600 | 70.473 | 3,424 |
| 28 | 1,53 | 418,89 | 68.727 | 75.600 | 82.473 | 4,006 |
| 30 | 1,62 | 480,87 | 78.273 | 86.100 | 93.927 | 4,441 |
| 32 | 1,76 | 547,12 | 90.000 | 99.000 | 10.800 | 5,320 |

LA MAISON REMER PEUT PRODUIRE LES CABLES CI-ILLUSTRES DANS LES DIAMETRES DEMANDES PAR LE CLIENT.