

SC series

3Axes Control Coilers




SC-30

シンコーマシンツール株式会社

機種選定表 Model Selection Chart

機種 Model	SC-04	SC-12	SC-20	SC-30
対応線径 Wire Diameter	0.1~0.6mm .004" ~.024" (D/d=4.)	0.4~1.2mm .016" ~.047" (D/d=4.)	0.9~2.0mm .035" ~.079" (D/d=4.)	1.4~3.2mm .055" ~.126" (D/d=4.)
送りロール連数 Pairs of Rollers	1	1	2	2
最大線送り速度 Max Feeding Speed	120m/min 393.6ft./min.	90m/min 295ft./min.	90m/min 295ft./min.	90m/min 295ft./min.
最大カム速度 Max Cam Speed	600rpm	600rpm	530rpm	450rpm
最大巻き外径 Max. O.D.	10mm(15mm) .394" (.591")	20mm(30mm) .787" (1.181")	35mm(50mm) 1.181" (1.969")	50mm(75mm) 1.969" (2.953")
電源容量 Power Source	30A	30A	40A	60A
重量 Weight	420Kg 930lb.	540Kg 1,200lb.	780Kg 1,700lb.	1,050Kg 2,300lb.
寸法 Dimension	H 1,700mm(66.9") W1 990mm(39.0") W2 970mm(38.2") L1 1,031mm(40.6") L2 670mm(26.4") WL 1,300mm(51.2")	H 1,700mm(66.9") W1 1,060mm(41.7") W2 1,000mm(39.4") L1 1,121mm(44.1") L2 760mm(29.9") WL 1,300mm(51.2")	H 1,700mm(66.9") W1 1,160mm(45.7") W2 1,100mm(43.3") L1 1,241mm(48.9") L2 880mm(34.6") WL 1,300mm(51.2")	H 1,710mm(67.3") W1 1,410mm(55.5") W2 1,350mm(53.2") L1 1,311mm(51.6") L2 950mm(37.4") WL 1,300mm(51.2")

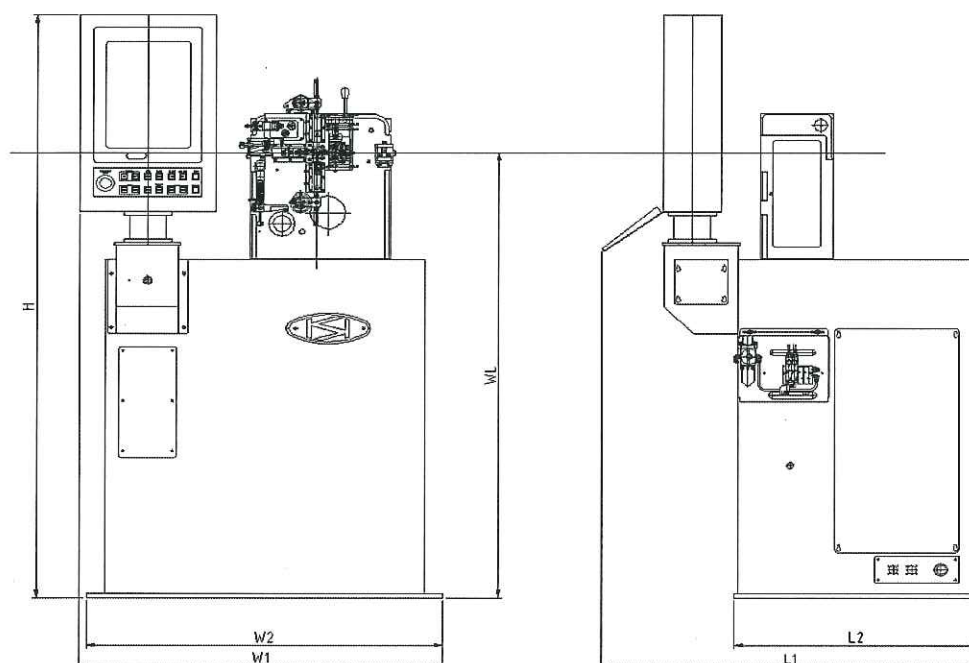

シンコーマシンツール株式会社

〒547-0001 大阪市平野区加美北3丁目17番25号
TEL.06(6792)-7388 FAX.(06)6794-1025
www.shinko-mach.co.jp
E-mail : info@shinko-mach.co.jp

SHINKO MACHINE TOOL CO.,LTD

3-17-25,Kami-Kita Hiranoku,Osaka 547-0001,Japan
(INT)Phone : +81-6-6794-6610,FAX :+81-6-6794-1025