


## DADI IN GABBIA MONTAGGIO FRONTALE SERIE 2100

### CAGE NUTS FRONT MOUNTING 2100 SERIES



**MATERIALI:**

Gabbia: ACC C67 S UNI EN 10132-4

Dado: ACC CL 8


Trattamento superficiale: PROTEZIONE GALVANICA GIALLA O BIANCA

**MATERIALS:**

Cage: CARBON STEEL C 67 S UNI EN 10132-4

Nuts: STEEL CL8

Treatment: ZINC PLATED CHR. 3

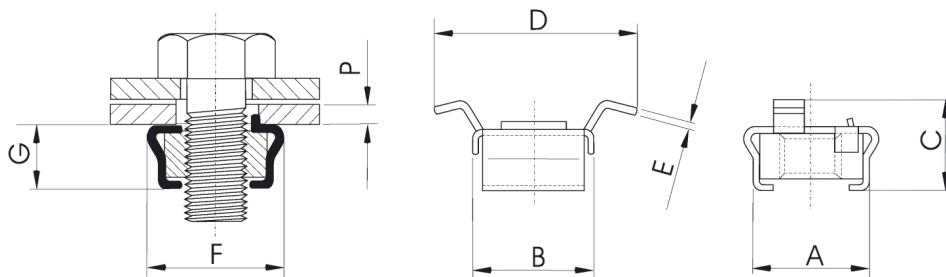

| Ø<br>Diametro Vite<br>Screw Diameter | P<br>Spessore Lamiera<br>Sheet Thickness | Riferimento<br>Reference | A    | B  | C   | D    | E   | F  | G | Foro rettangolare<br>Rectangular Hole<br>+0,2 - 0 |    |
|--------------------------------------|--|--------------------------|------|----|-----|------|-----|----|---|---|----|
| M4                                   | 0,4-0,7                                  | 2104-A                   | 11,2 | 12 | 7,4 | 20   | 0,5 | 13 | 6 | 8   | 13 |
|                                      | 0,8-1,1                                  | 2104-B                   |      |    | 7,8 | 19,5 |     |    |   |   |    |
|                                      | 1,2-1,5                                  | 2104-C                   |      |    | 8,2 | 18,5 |     |    |   |   |    |
|                                      | 1,6-1,9                                  | 2104-D                   |      |    | 8,6 | 18,5 |     |    |   |   |    |
|                                      | 2-2,3                                    | 2104-E                   |      |    | 9   | 18   |     |    |   |   |    |
| M5                                   | 0,4-0,7                                  | 2105-A                   | 11,2 | 12 | 7,4 | 20   | 0,5 | 13 | 6 | 8   | 13 |
|                                      | 0,8-1,1                                  | 2105-B                   |      |    | 7,8 | 19,5 |     |    |   |   |    |
|                                      | 1,2-1,5                                  | 2105-C                   |      |    | 8,2 | 18,5 |     |    |   |   |    |
|                                      | 1,6-1,9                                  | 2105-D                   |      |    | 8,6 | 18,5 |     |    |   |   |    |
|                                      | 2-2,3                                    | 2105-E                   |      |    | 9   | 18   |     |    |   |   |    |
| M6                                   | 0,4-0,7                                  | 2106-A                   | 11,2 | 12 | 7,4 | 20   | 0,5 | 13 | 6 | 8   | 13 |
|                                      | 0,8-1,1                                  | 2106-B                   |      |    | 7,8 | 19,5 |     |    |   |   |    |
|                                      | 1,2-1,5                                  | 2106-C                   |      |    | 8,2 | 18,5 |     |    |   |   |    |
|                                      | 1,6-1,9                                  | 2106-D                   |      |    | 8,6 | 18,5 |     |    |   |   |    |
|                                      | 2-2,3                                    | 2106-E                   |      |    | 9   | 18   |     |    |   |   |    |

