


V50..M


Hot Connection Bolt
according to DIN 46200

Zyl.-Bolt
M5*30 DIN 84-5.8

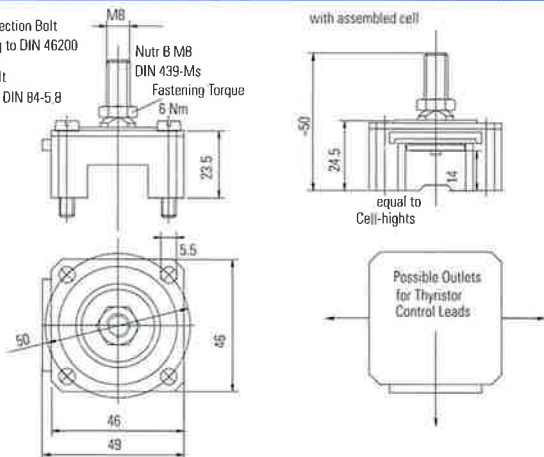

type designation	order no.	clamping force [kN]	suitable for Ø [mm] housings	height [mm]	minimum creepage [mm] distance
V50-14.45M	SP000096563	4.5	42	14	11
V50-14.60M	SP000096564	6.0	42	14	11


V50..N

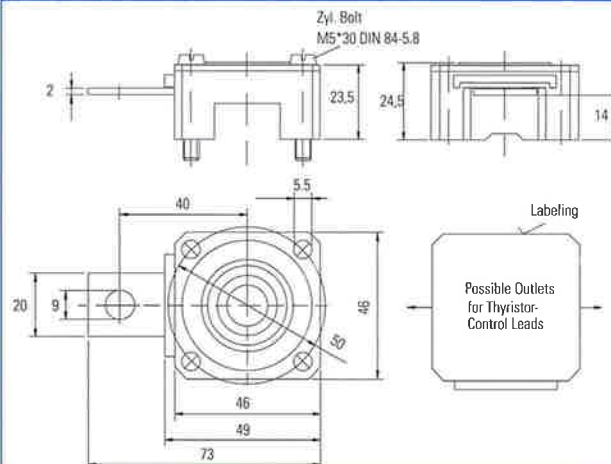

type designation	order no.	clamping force [kN]	suitable for Ø [mm] housings	height [mm]	minimum creepage [mm] distance
V50-14.45N	SP000090625	4.5	42	14	11
V50-14.60N	SP000090626	6.0	42	14	11


V61..M

Hot Connection Bolt
acc. to DIN 46200
Fastening Torque
for the Nut: 10 Nm

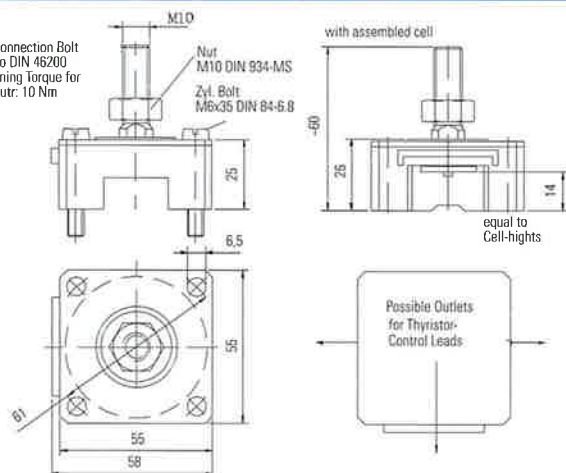

type designation	order no.	clamping force [kN]	suitable for Ø [mm] housings	height [mm]	minimum creepage [mm] distance
V61-14.80M	SP000096565	8.0	48	14	11


V61..N

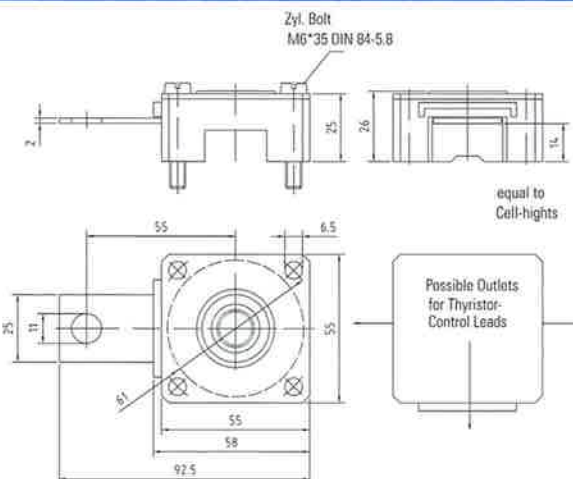

type designation	order no.	clamping force [kN]	suitable for Ø [mm] housings	height [mm]	minimum creepage [mm] distance
V61-14.80N	SP000090627	8.0	48	14	11


V72-14..M

hot connection bolt
according to DIN
46200
fastening torque
10Nm

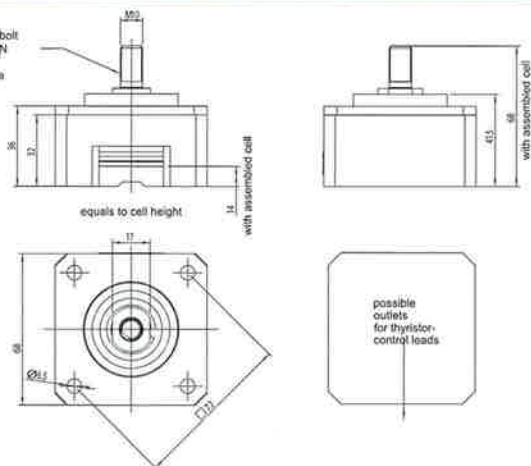


type designation	order no.	clamping force [kN]	suitable for Ø [mm] housings	height [mm]	minimum creepage [mm] distance
V72-14.150M	SP000096566	15.0	58	14	11

V72-26..M

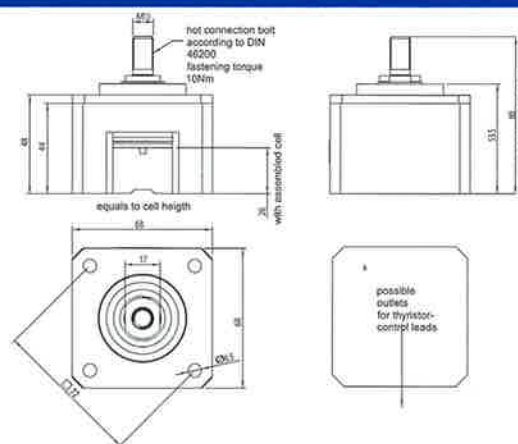


type designation	order no.	clamping force [kN]	suitable for Ø [mm] housings	height [mm]	minimum creepage [mm] distance
V72-26.80M	SP000096569	8.0	58	26	23
V72-26.120M	SP000096567	12.0	58	26	23
V72-26.150M	SP000096568	15.0	58	26	23

V 89

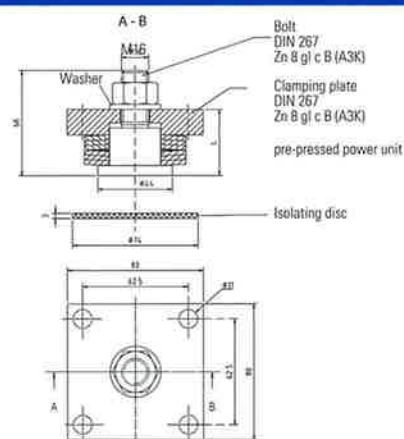

type designation	order no.	clamping force [kN]	suitable for housings	
			Ø [mm]	height [mm]
V89-26.170N	SP000358597	17	75	26
V89-26.300N	SP000090624	30	75	26
V89-26.400N	SP000090662	40	75	26

V 100

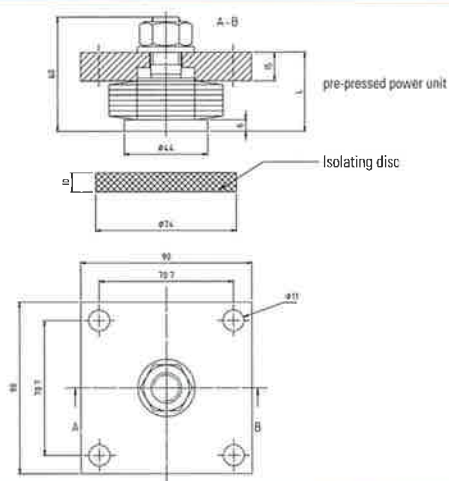

type designation	order no.	clamping force [kN]	suitable for housings	
			Ø [mm]	height [mm]
V100-35.200N	SP000090635	20	75	26