



A6A:35.XX

VOLTAGE RATINGS

Part Number	V _{RRM} , V _R (V)		V _{RSM} , V _R (V) Max. non-rep. peak reverse voltage
	Max. rep. peak reverse voltage		
	T _J = 0 to 150°C	T _J = -40 to 0°C	
A6A:35.04	400	400	500
A6A:35.06	600	600	700
A6A:35.08	800	800	900
A6A:35.10	1000	1000	1100
A6A:35.12	1200	1200	1300
A6A:35.14	1400	1400	1500
A6A:35.16	1600	1600	1700

This datasheet applies to:

A6A:35.XX, A6B:35.XX

For long lead, add "L"
to the end of part number

MAXIMUM ALLOWABLE RATINGS

PARAMETER	VALUE	UNITS	NOTES
T_J Junction Temperature	-40 to 150	$^{\circ}\text{C}$	-
T_{stg} Storage Temperature	-40 to 150	$^{\circ}\text{C}$	-
$I_{F(AV)}$ Max. Av. current @ Max. T_C	35	A	180° half sine wave
	150	$^{\circ}\text{C}$	
$I_{F(RMS)}$ Nom. RMS current	55	A	-
I_{FSM} Max. Peak non-rep. surge current	390	A	50 Hz half cycle sine wave Initial $T_J = 150^{\circ}\text{C}$, rated V_{RRM} applied after surge.
	425		60 Hz half cycle sine wave
	430		50 Hz half cycle sine wave Initial $T_J = 150^{\circ}\text{C}$, no voltage applied after surge.
	510		60 Hz half cycle sine wave
I^2t Max. I^2t capability	555	A^2s	$t = 10\text{ms}$ Initial $T_J = 150^{\circ}\text{C}$, rated V_{RRM} applied after surge.
	605		$t = 8.3\text{ ms}$
	1000		$t = 10\text{ms}$ Initial $T_J = 150^{\circ}\text{C}$, no voltage applied after surge.
	860		$t = 8.3\text{ ms}$
$I^2t^{1/2}$ Max. $I^2t^{1/2}$ capability	10.265	$\text{A}^2\text{s}^{1/2}$	Initial $T_J = 150^{\circ}\text{C}$, no voltage applied after surge. I^2t for time $t_x = I^2t^{1/2} * t_x^{1/2}$. ($0.1 < t_x < 10\text{ms}$).



A6A:35.XX

CHARACTERISTICS

PARAMETER	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
V_{FM} Peak forward voltage	---	---	1.40	V	Initial $T_J = 25^{\circ}\text{C}$, sinusoidal wave, $I_{peak} = 110\text{A}$.
$V_{F(TO)1}$ Low-level threshold	---	---	0.72	V	$T_J = 180^{\circ}\text{C}$
$V_{F(TO)2}$ High-level threshold	---	---	0.93		Av. power = $V_{F(TO)} * I_{F(AV)} + r_F * [I_{F(RMS)}]^2$
r_{F1} Low-level resistance	---	---	7.20	m	Use low values for $I_{FM} < I_{F(AV)}$
r_{F2} High-level resistance	---	---	3.60		
I_{RM} Peak reverse current	---	---	5.00	mA	$T_J = 180^{\circ}\text{C}$. Max. Rated V_{RRM}
R_{thJC} Thermal resistance, junction-to-case	---	---	0.85	$^{\circ}\text{C/W}$	DC operation
R_{thCS} Thermal resistance, case-to-sink	---	---	0.55	$^{\circ}\text{C/W}$	Mtg. Surface smooth, flat and greased. Single side.
wt Weight	---	10(0.36)	---	g(oz.)	---
Case Style	Press-fit			---	---

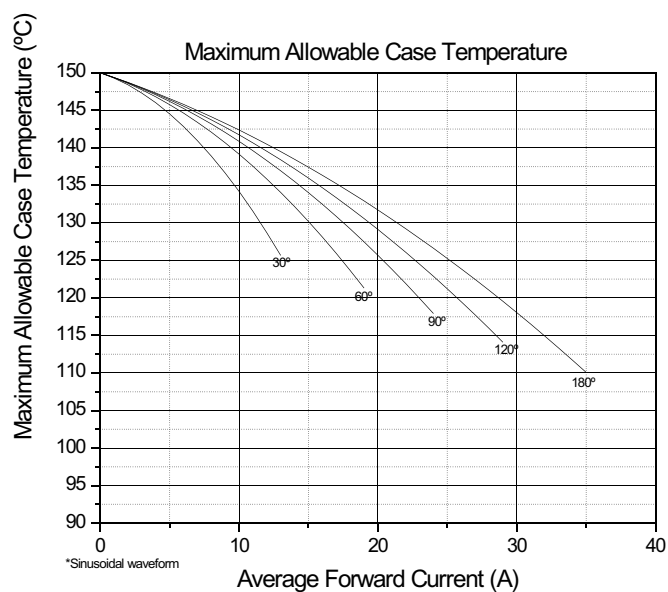


Fig. 1 - Current Ratings Characteristics

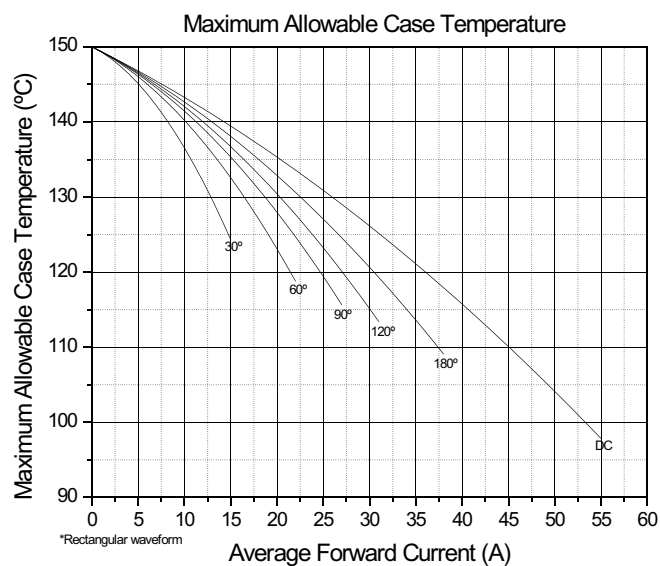


Fig. 2 - Current Ratings Characteristics



A6A:35.XX

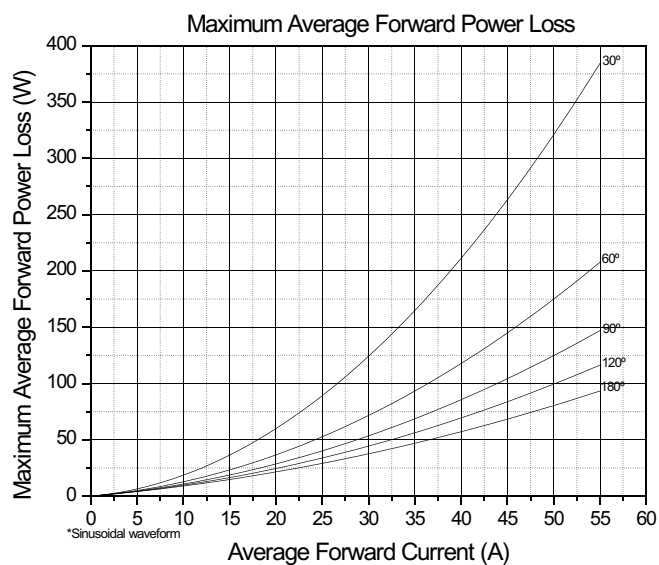


Fig. 3 - Average Forward Power Loss Characteristics

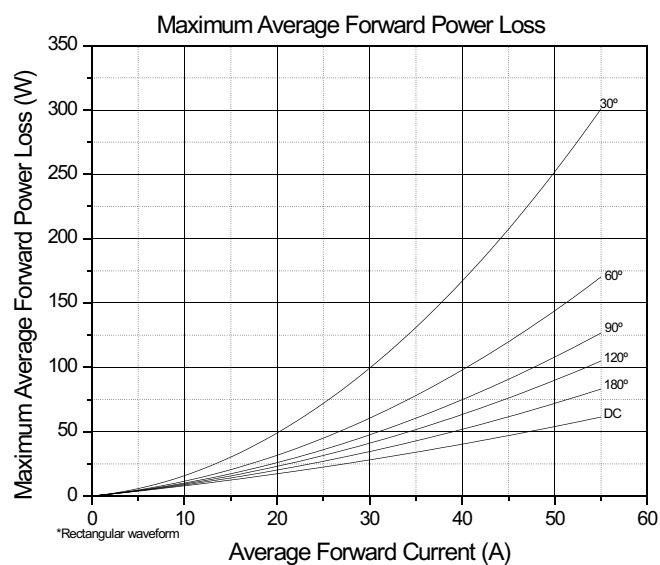


Fig. 4 - Average Forward Power Loss Characteristics

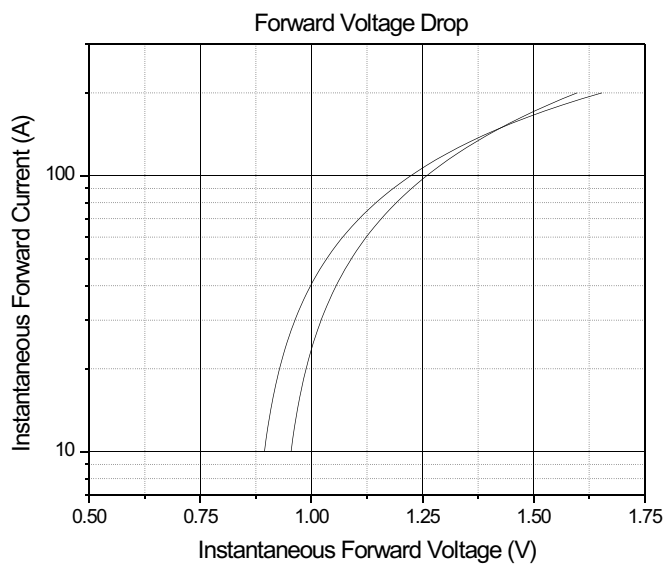


Fig. 5 - Forward Voltage Drop Characteristics

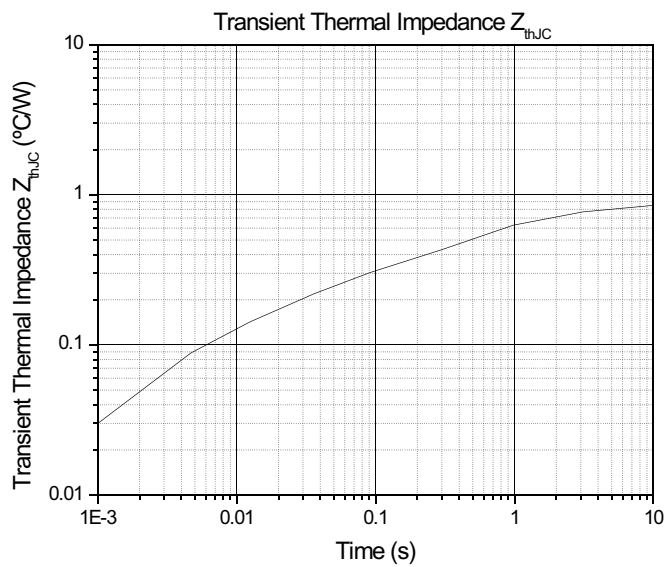


Fig. 6 - Transient Thermal Impedance Z_{thJC} Characteristics



A6A:35.XX

“Press-Fit”

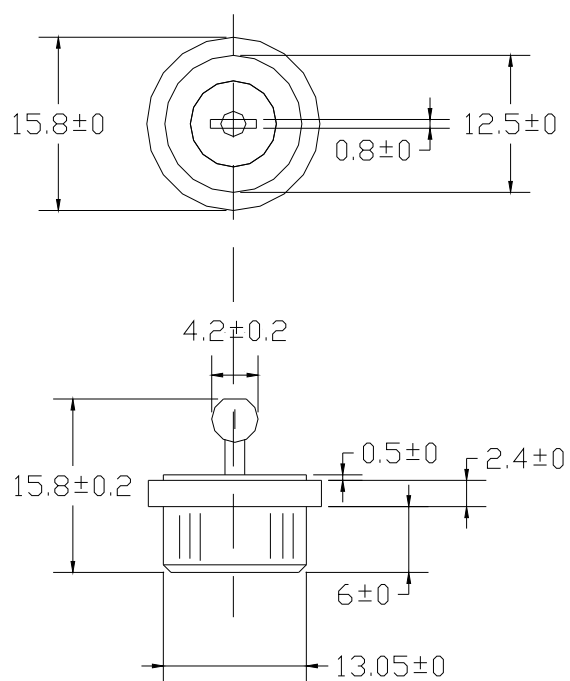


Fig. 7 - Outline Characteristics