

## 630EU690V-100kA Semiconductor Fuse With Indicator




### Specifications

Description	630EU690V-100kA
Weight	.85
Level	SYSTEM NV/NH
Indicator	Top fuse status indicator
Rated DC voltage (V)	440
Rated current (A)	630
Type	NH
Size	NH3
Product group	Semiconductor Protection
Characteristics	aR (accompanied semiconductor protection)
Rated AC voltage (V)	690
Breaking capacity AC (kA)	100
Breaking capacity DC (kA)	50


### Trent international classification

Nominal rated current	630A
Nominal rated voltage	690V
Construction size	NH3
Utilization category	aR (accompanied semiconductor protection)
Type of fuse status indicator	Top fuse status indicator


## Melting energy characteristics

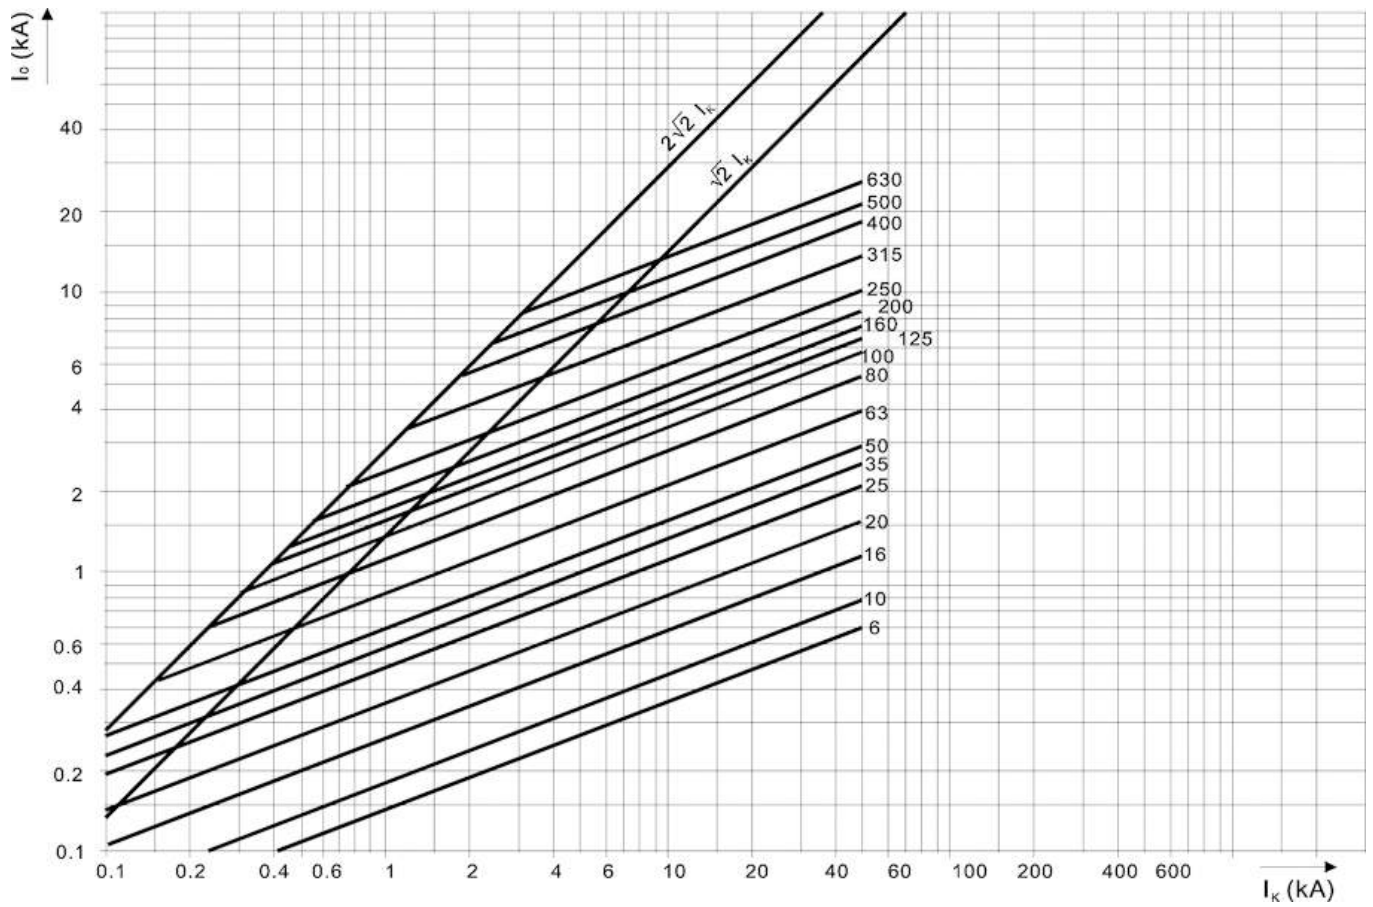

## Time current characteristics

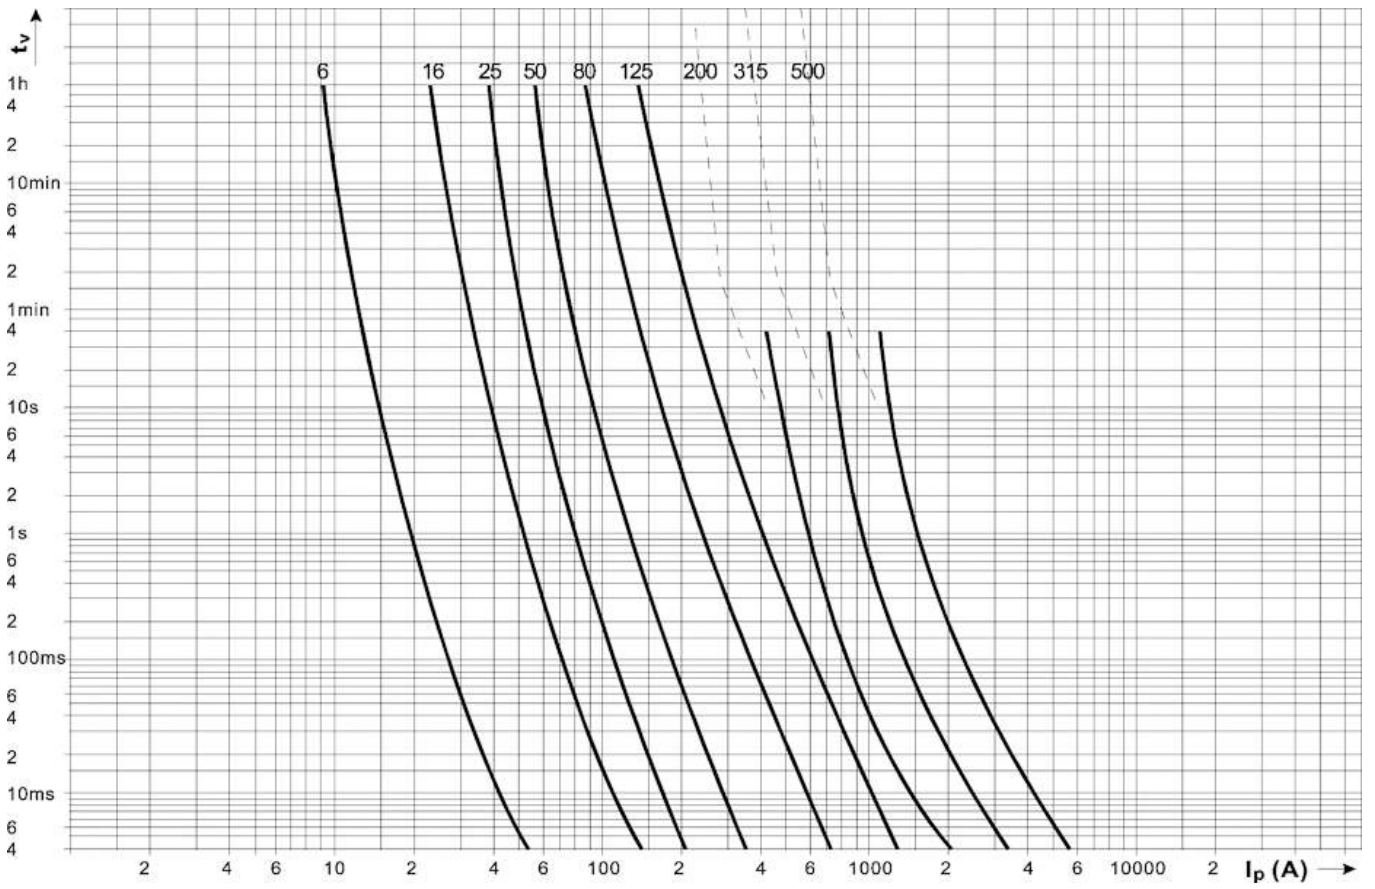

## Dimension drawing

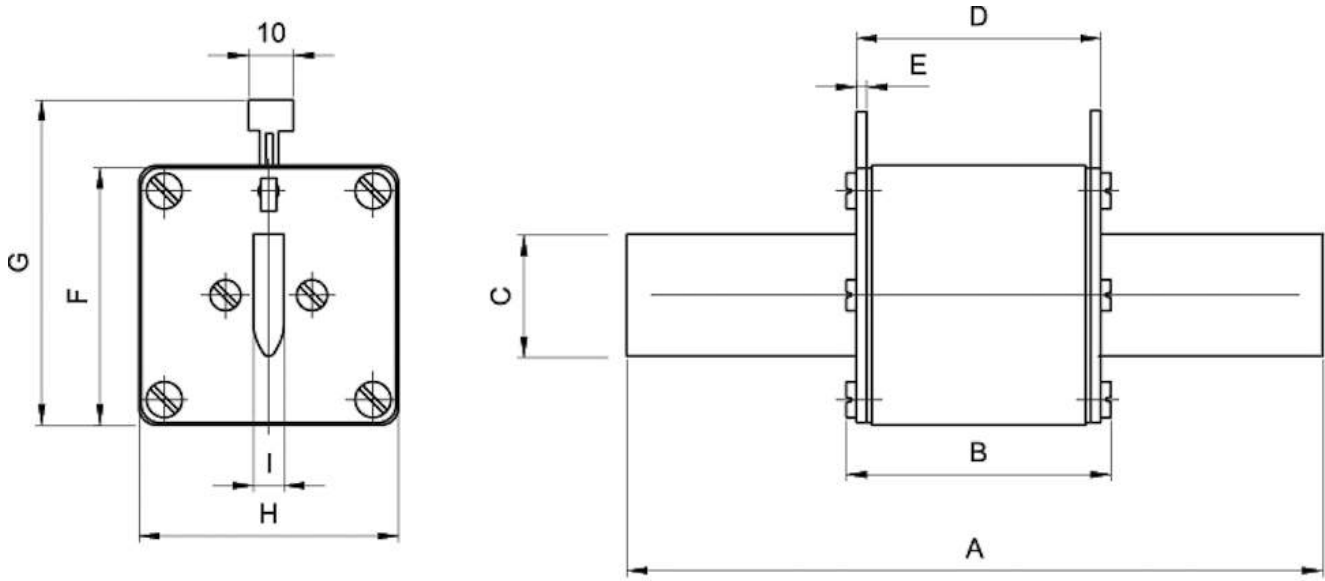

Size	A	B	C	D	E	F	G	H	I
1	135	75	20	68	2	40	61,5	46	6
2	150	75	26	68	2	48	71,5	57	6
3	150	75	36	68	2	60	81,5	69	6