



Key Parameters

V_{RRM}	= 1800V
$I_{F(AV)}$	= 400A
I_{FSM}	= 9250A
$V_{F(TO)}$	= 0.85V
r_F	= 0.51mΩ

Features

- Full blocking capability over wide temperature range
- Hermetic metal case with glass insulator
- Threaded Stud

Applications

- Power Supplies
- Uncontrolled Rectifiers
- Battery Chargers

Ordering Information


MS D	403	N	XX	M	B
Rectifier Diode	Current code	Polarity R= Stud Anode N= Stud Cathode	Voltage Code Code X 100 = V_{RRM}	Stud Threads M = Stud M20 X 1.5 U = 3/4" -16UNF-2A M1 = Stud M16 X 1.5	Technology B = Solder Bond Technology
Order Code MS D403N16MB : 1600V V_{RRM} , M20 Stud, Diode with stud Cathode					

Prepared by : ABA	Date of Publication : 25.03.2015
Approved by : RBS	Revision : 0

Symbol	Characteristic	Conditions	T _j [°C]	Value	Unit
BLOCKING					
V _{RRM}	Repetitive peak reverse voltage		190	200 - 1800	V
V _{RSM}	Non-repetitive peak reverse voltage		190	300 - 1900	V
I _{RRM}	Repetitive peak reverse current	V = V _{RRM}	190	15	mA
CONDUCTING					
I _{F(AV)}	Mean forward current	180° sin ,50 Hz, T _c =120°C 180° sin ,50 Hz, T _c =100°C		400 480	A
I _{FRMS}	RMS current			630	A
I _{FSM}	Surge forward current	Sine wave, 10 ms Without reverse voltage	25	9250	A
			190	8250	A
I ² t	I ² t	Sine wave, 10 ms Without reverse voltage	25	427 x 10 ³	A ² s
			190	340 x 10 ³	A ² s
V _F	Forward voltage	On-state current = 1500A	190	1.62	V
V _{F(TO)}	Threshold voltage		190	0.85	V
r _F	Forward slope resistance		190	0.51	mΩ
MOUNTING					
R _{th(j-c)}	Thermal impedance, sin 180°	Junction to case		0.13	°C/W
R _{th(c-h)}	Thermal impedance	Case to heatsink		0.04	°C/W
T _j	Max. junction temperature			190	°C
T _{stg}	Storage temperature			-40 200	°C
M	Mounting torque			26	NM
W	Weight (Approx.)			250	gm
			Prepared by : ABA	Date of Publication : 25.03.2015	
			Approved by : RBS	Revision : 0	


DISSIPATION CHARACTERISTICS

SINE WAVE

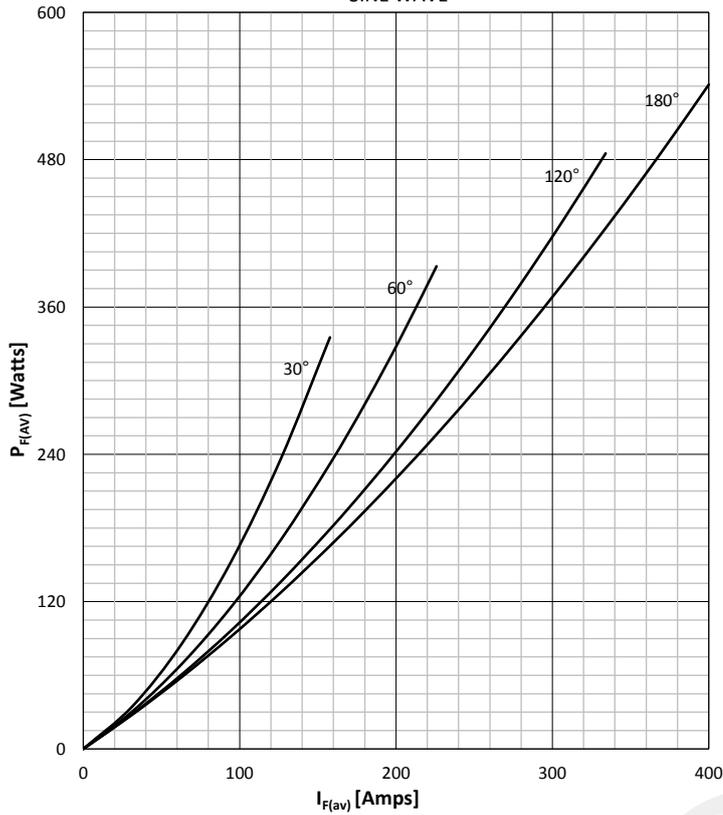


FORWARD CURRENT DERATING CURVE

SINE WAVE

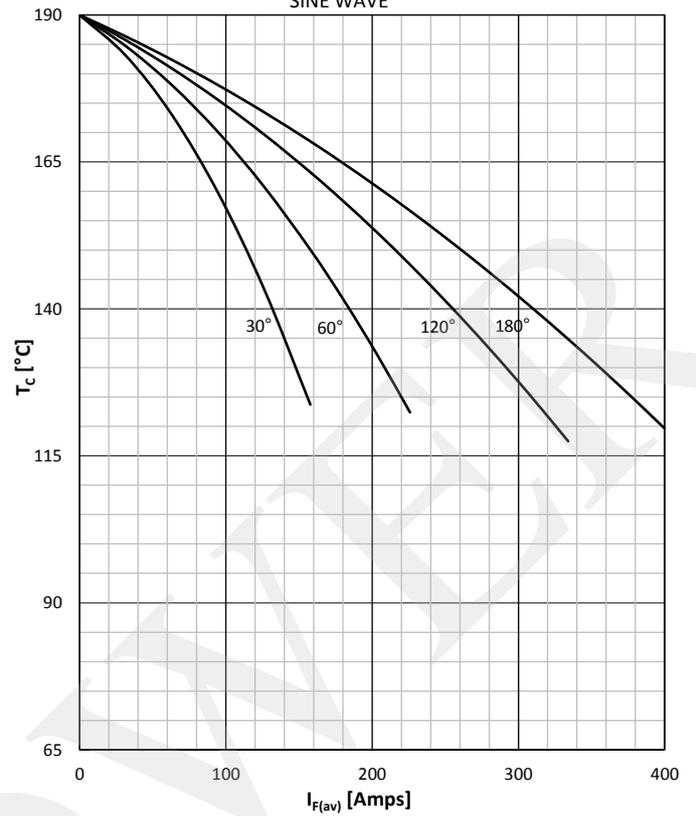


DISSIPATION CHARACTERISTICS

SQUARE WAVE

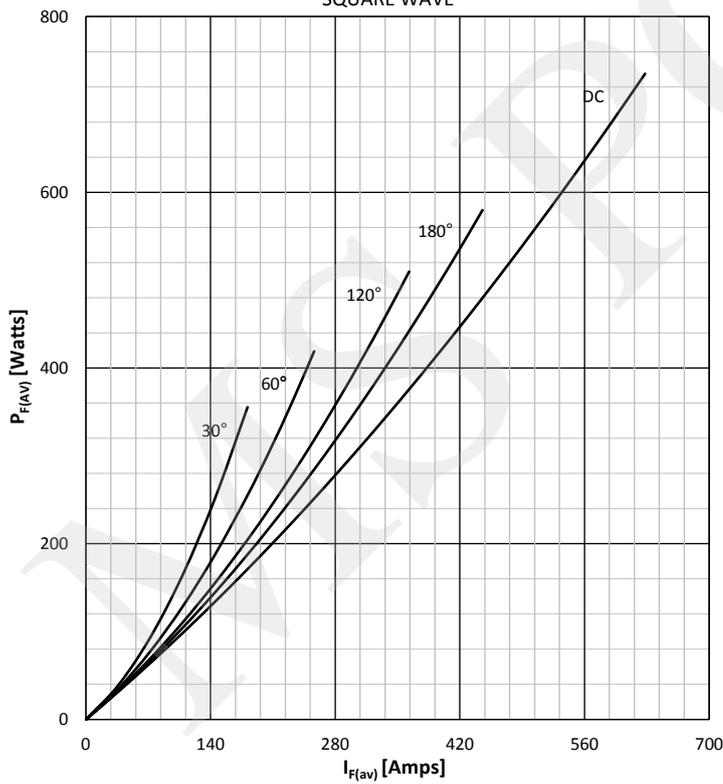

FORWARD CURRENT DERATING CURVE

SQUARE WAVE

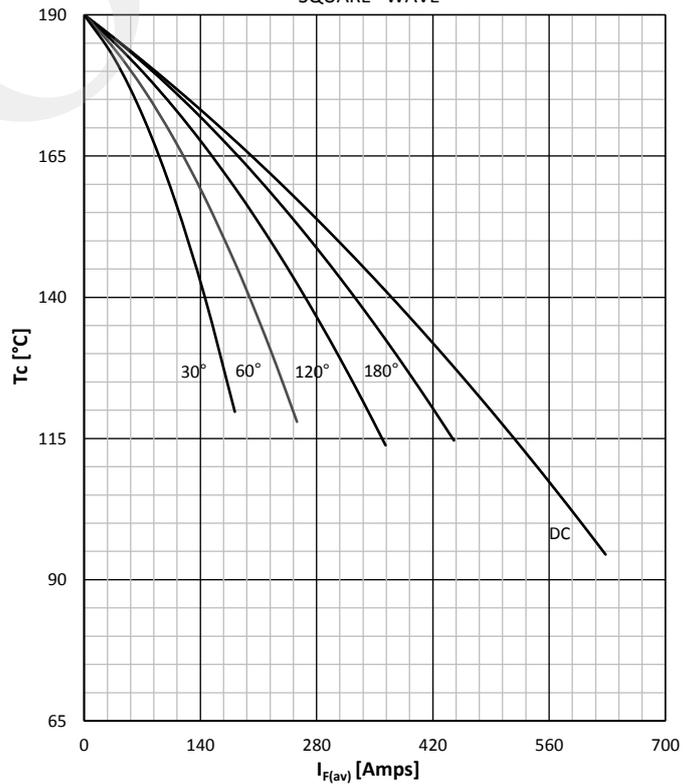


Prepared by : ABA


Date of Publication : 25.03.2015

Approved by : RBS

Revision : 0

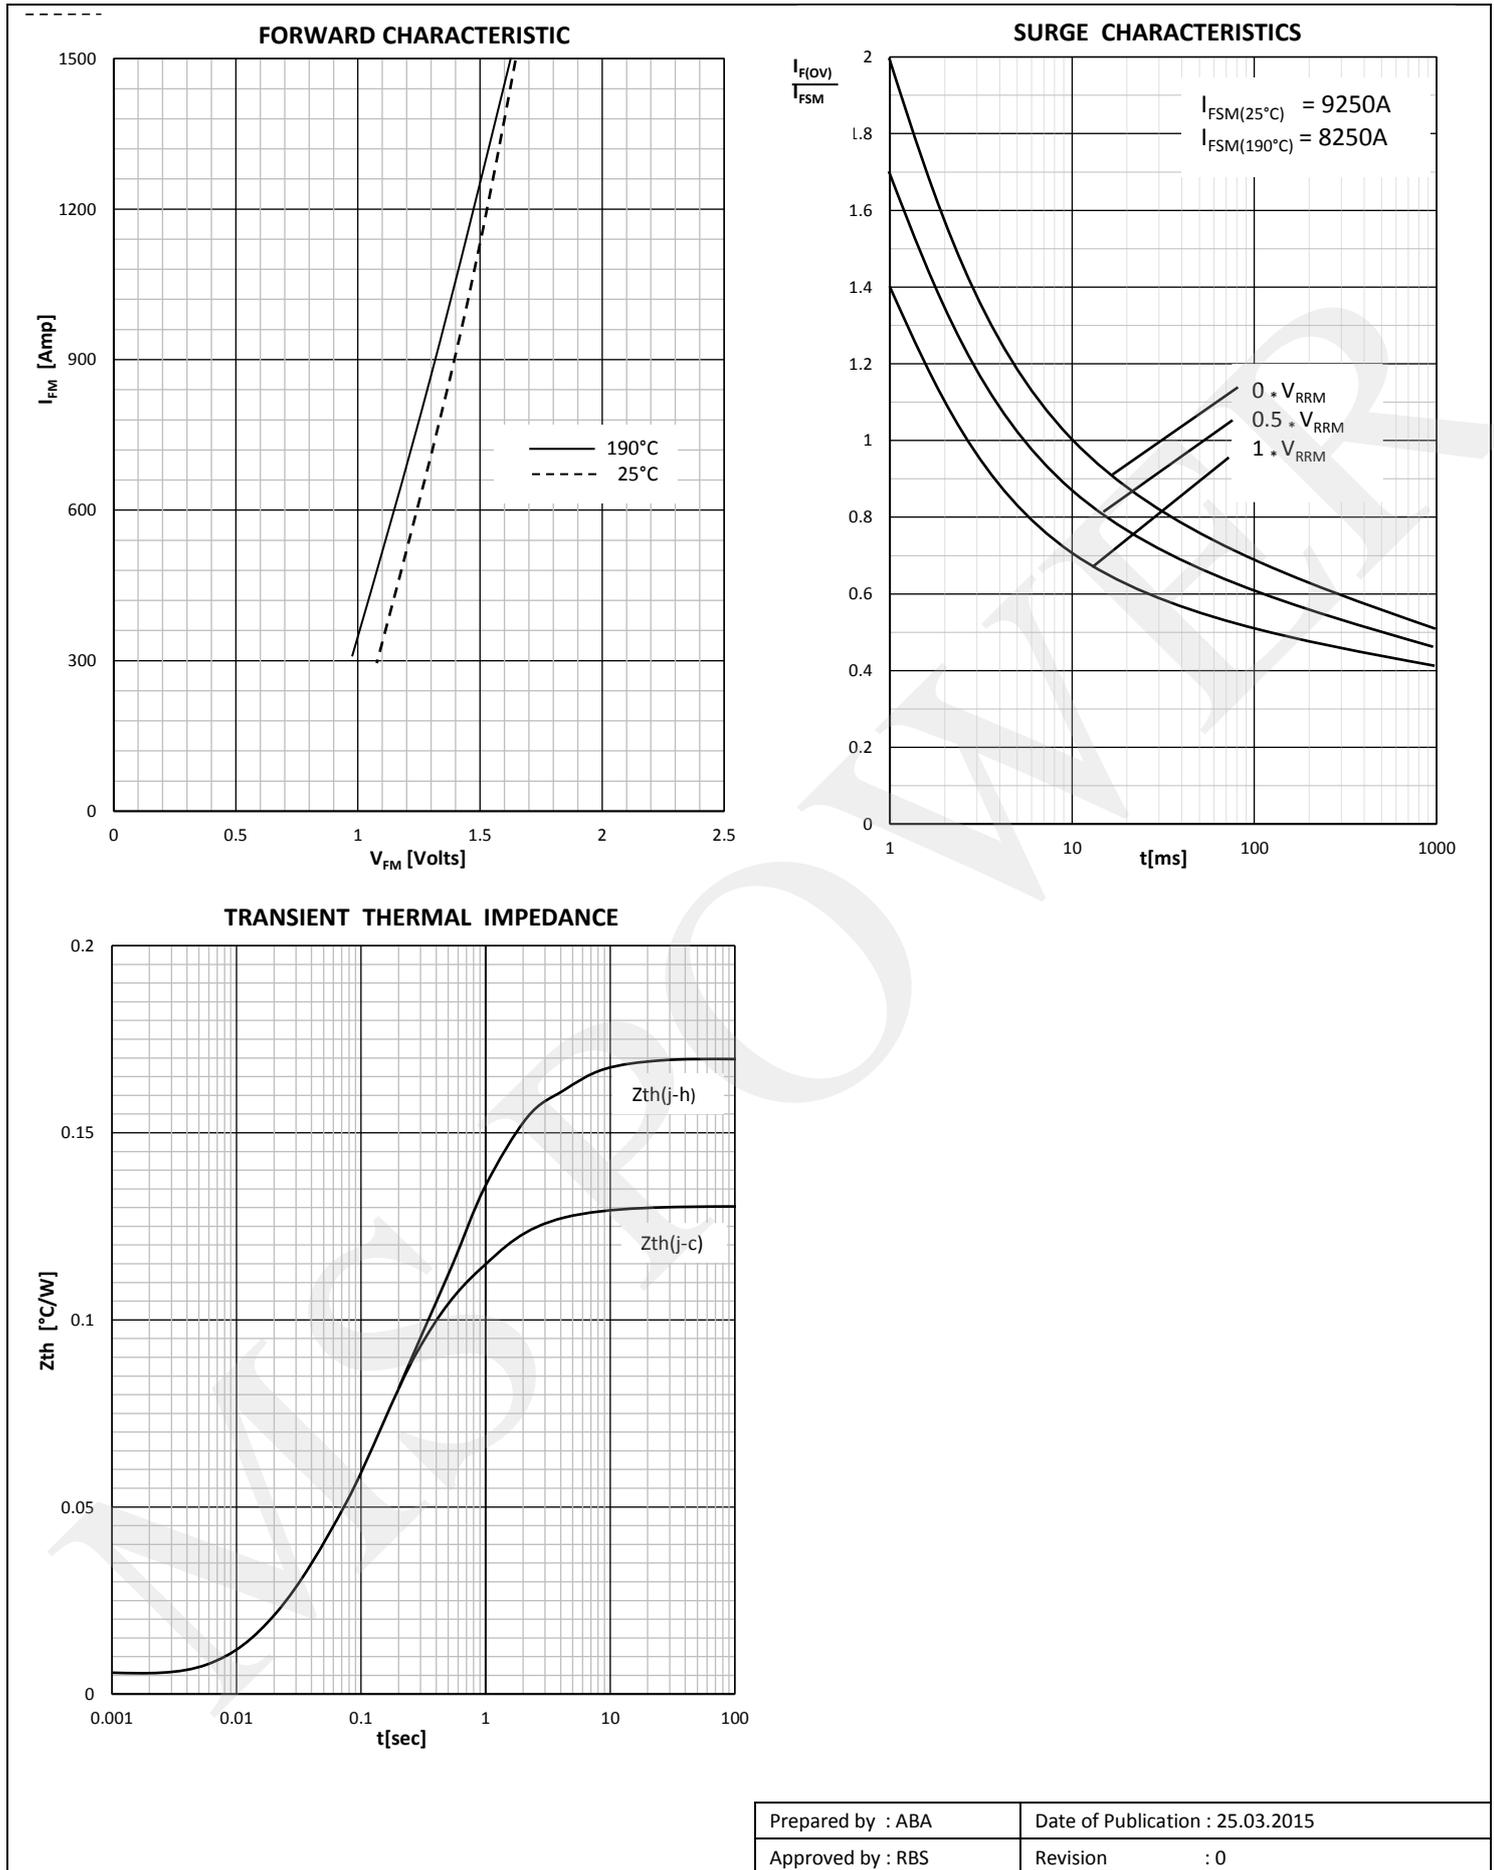

Outline

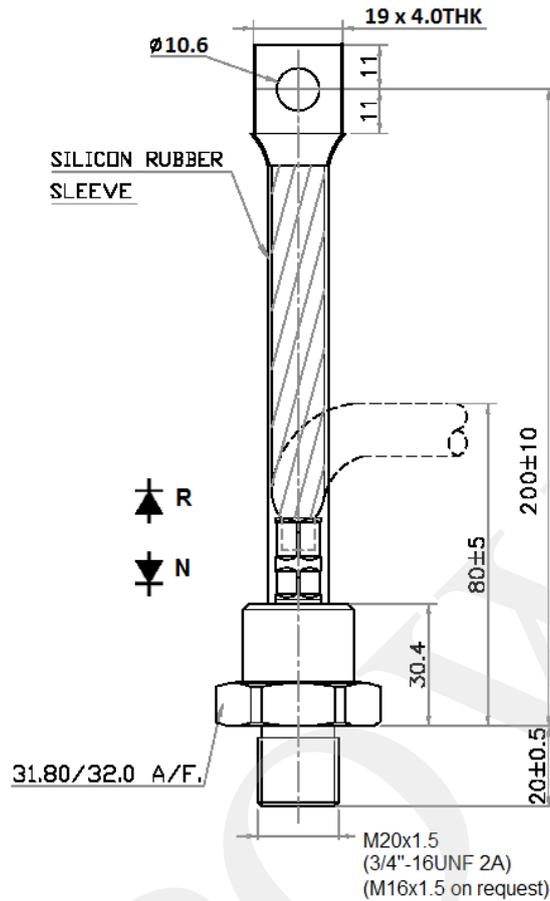

MS Power GmbH

Mergenthalerallee 79-81
65760 Eschborn, Germany
Web: www.mspowergroup.com
Mail: info@mspowergroup.de

Sales & Enquiry:

sales@mspowergroup.de

Technical Support:

solution@mspowergroup.de

After sales Service:

service@mspowergroup.de

Phone: +49 (0) 6196/7768 666

Fax: +49 (0) 6196/7757 888



Prepared by : ABA

Date of Publication : 25.03.2015

Approved by : RBS

Revision : 0

Terms & Conditions of usage :

The data contained in this product datasheet is exclusively Intended for technically trained staff. You and your technical departments will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to such application. This product datasheet is describing the characteristics of this product for which a warranty is granted. Any such warranty is granted exclusively pursuant the terms and conditions of the supply agreement. There will be no guarantee of any kind for the product and its characteristics. The information in the valid application-and assembly notes of the device must be considered.

Should you require product information in excess of the data given in this product datasheet or which concerns the specific application of our product, please contact the sales office, which is responsible for you (see www.mspowergroup.com). For those that are specifically interested we may provide application notes.

Due to technical requirements our product may contain dangerous substances. For information on the types in question please contact the sales office, which is responsible for you.

Should you intend to use the Product in aviation applications, in health or live endangering or life support applications, please notify. Please note, that for any such applications we urgently recommend

- to perform joint Risk and Quality Assessments;
- the conclusion of Quality Agreements;
- to establish joint measures of an ongoing product survey, and that we may make delivery depended on the realization of any such measures.

If and to the extent necessary, please forward equivalent notices to your customers.

Changes of this product datasheet are reserved.

Prepared by : ABA	Date of Publication : 25.03.2015
Approved by : RBS	Revision : 0