


Item | Split Core Current Transformer

Model | SCT-6000

Dimension(Unit:mm)

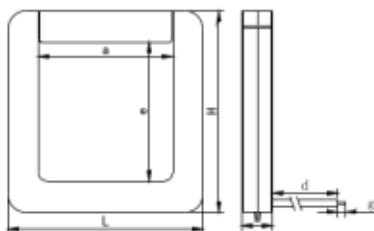

Outline Size			Window Size		Leads	
L	W	H	a	e	d	g
220	30	226	153	157	1000	6



Ratings: 1000,1250,1500,2000,2500,3000,4000,5000 Amp

Electrical Diagram




Parameters

Cutrrrent Range	≤5000A
Output	0.333V
Accuracy	1.0
Frequency	50/60HZ
Insulation Strength	3KV

Performance Curve

SCT-6000 3000A/0.33V Performance Curves

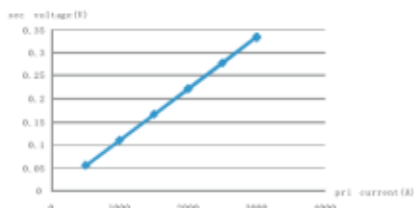

Specification

Leads:1015# 20awg
 Operating Temperature:-20℃ to +55℃
 Storage Temperature:-40℃ to +70℃
 Features: Split core design, the split core design permits non-contact current measurements through magnetic field induction without requiring that the primary wire be taken offline and disconnected for CT installation. This method permits a safer, easy and portable current measurement

