




HS211A & HS211B Heatsink

REV. DATE


08/31/12

For Technical Support:

sales@fastron.com.au

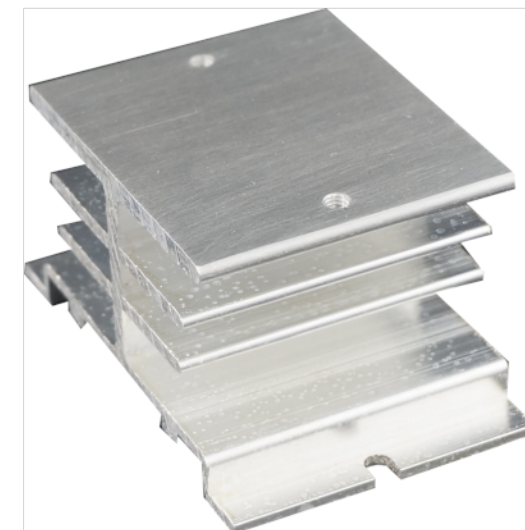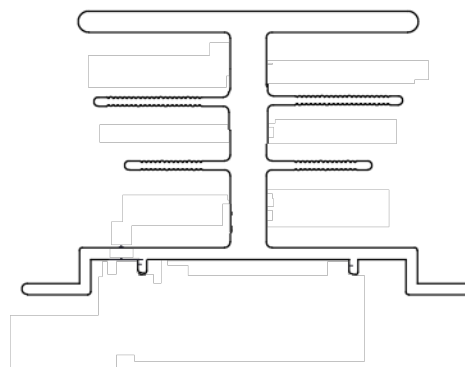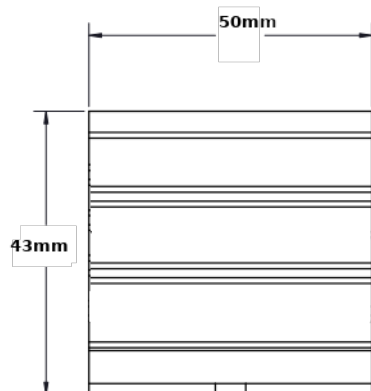

20 Amp @40 DeG C
Based on 50 Deg C Rise

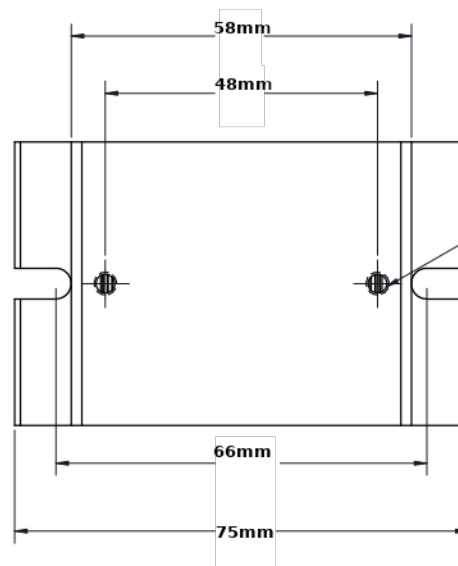

**Note: HS211B has 45/46mm
Hole spacing for OEM
Fastron/Trent SSR's only.**

M4x0.7 Tapped Hole (2X)

Tolerances: ± 0.02 in / 0.5 mm. All dimensions are in: inches [millimeters]