

HS212,HS212-F, HS212DR, HS212DR-F Heatsink




Features:

- Standard Heatsink Footprint
- Compact and light weight
- Natural and Fan Cooled Options
- Panel or Din Rail Mount Options
- Pre-drilled for 3 Phase or Single Phase SSR



Outline & Installation Dimensions

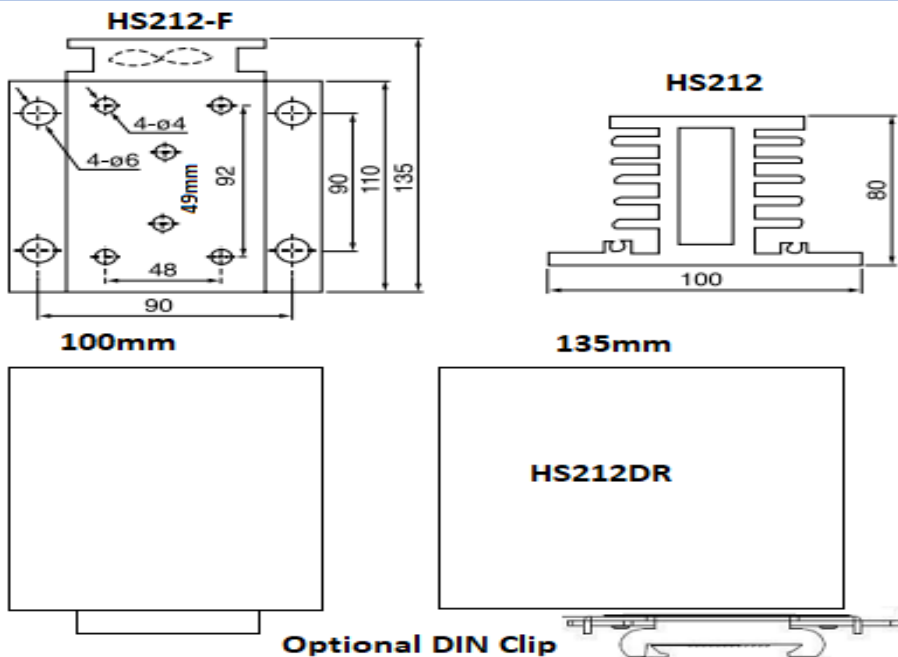

Thermal Ratings

HS212	1°C/Watt	60 Amp @ 40 Deg C (3 x 20 Amp)
HS212DR	1°C/Watt	60 Amp @ 40 Deg C (3 x 20 Amp)
HS212-F	0.4°C/Watt	110 Amp @ 40 Deg C (3 x 36 Amp)
HS212DR_F	0.4°C/Watt	110 Amp @ 40 Deg C (3 x 36 Amp)

Material

Alloy 6060 T5

V1.0

www.fastron.com.au