

41F-2Z-C2-1 12~24VAC/DC



- Matches Major Brands

-To Suit F115 Series 2 Pole Relays-

Two Pole Slim Relay Base

Features:

-Din Rail Mount

-Compact and light weight

Type

Dimensions

Contact Arrangement

Rated Voltage

Rated Current

Safety Approvals

Socket

89.5mm x 14mm x 76mm

1 x DPDT (2 x Changeover)

250VAC

8 Amp

CE

Termination and Mounting

Terminal Type

Mounting Type

Plug-in Force

Pull out Force

Terminal Torque

Rail Install Force

Contact Resistance

Insulation Resistance

Dielectric Strength

Vibration

Shock

Temperature Resistance

Cold Resistance

Screw Terminal

Din Rail Mount (35mm)

30-40 N (3 – 4 kgf)

15-25 N (1.5 – 2.5 kgf)

6kgf

7 < F < 30 N (0.7 < F < 3kgf)

< 40m Ohm (24VDC @ 1 Amp)

> 1000 M Ohm (500vdc)

Leak Current = 1mA > 2500 VAC (50 Hz 1 sec)

10-55Hz Double Amplitude 1.0mm

98 m/s² (10g) , 6ms

70 Deg C +/- 2 Deg C for 2 Hours

-25 Deg C +/- 2 Deg C for 2 Hours

40 Deg C +/- 2 Deg C, Humidity 90-95 % RH for 48 Hours, then room temp for 2 hours

Moisture Resistance


Service Life

Plug/Remove cycles

> 100,000 Operations

50 times

Outline & Installation Dimensions

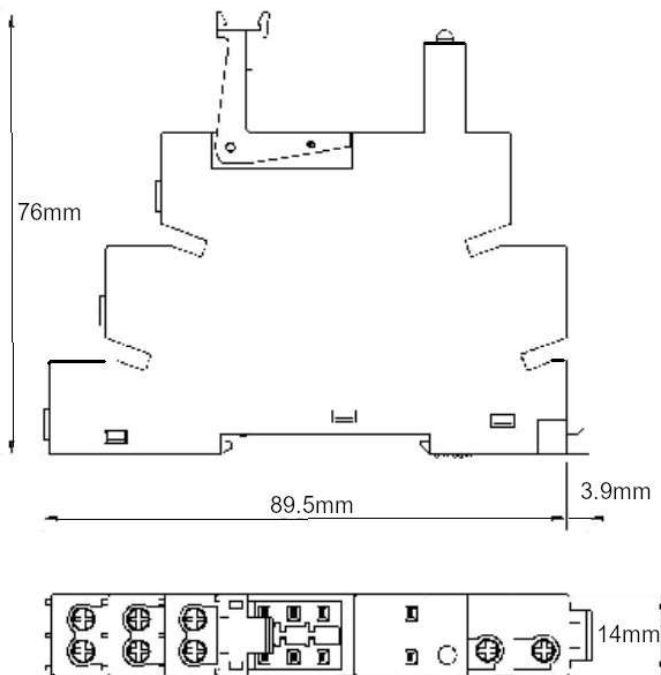

V1.0 www.fastron.com.au

