




# AUTO RANGE MULTIMETER

## CAT IV DMM with USB / LAN Wire Test VA40 / VA40R / VA43

VA40

VA40R

VA43

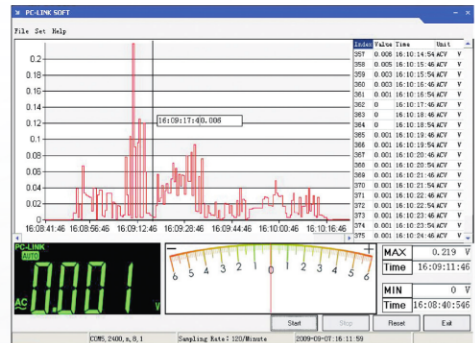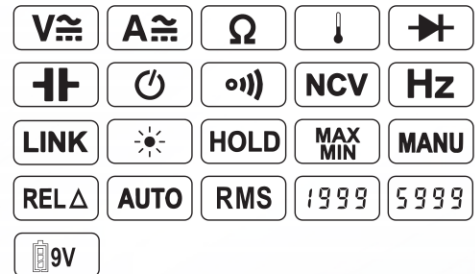

### Specifications

	VA40	VA40R	VA43
DC Voltage	600mV±0.5%,6/60/600V±0.8%,1000V±1.0%		200mV/2V/20V/200V/600V ±(0.7%+4)
AC Voltage	600mV/6V/60V/600V±1.0%,1000V±1.5%		200mV/2V/20V/200V/600V ±(1%+6)
DC Current	600µA/6000µA/60mA/600mA/6A/10A±1.5%		200µA/2mA/20mA/200mA ±(2%+10)
AC Current	600µA/6000µA/60mA/600mA±1.5%,6A/10A±3%		200µA/2mA/20mA/200mA ±(3%+10)
Resistance	600Ω/6KΩ/60KΩ/600KΩ/6MΩ±0.5%,60Ω±1.5%		200Ω/2KΩ/20KΩ/200KΩ/2MΩ/20MΩ ±(1%+5)
Capacitance	60nF±3%,600nF/6µF/60µF/600µF/6mF±5% (60mF)		
Logic Frequency	10 Hz ~ 1MHz ±(0.1%+3)		
Linear Frequency	6 Hz ~ 10KHz ±(0.05%+8)		
Frequency	10 Hz ~ 1MHz ±(0.1%+3)		
Temperature	-55~0°C ±5.0%,0~1000°C ±2.0%		

### Features

	VA40	VA40R	VA43
Max. Display	5999	5999	1999
Auto/Manual Range	✓	✓	✓
NCV Function	✓	✓	✓
RMS Measurement	✓	✓	✓
Max measurement	✓	✓	✓
Relative measurement	✓	✓	✓
Data hold	✓	✓	✓
Back light	✓	✓	✓
Diode test	✓	✓	✓
Continuity test	✓	✓	✓
LAN wire test	✓	✓	✓
Phone test	✓	✓	✓
Cable track	✓	✓	✓
USB port connect to PC	✓	✓	✓
Low power indication	✓	✓	✓
Auto power off	✓	✓	✓
Low battery detect	✓	✓	✓
Power	Battery 6F22(9V)X1	Battery 6F22(9V)X1	Battery 6F22(9V)X1
Size	190x90x40mm	190x90x40mm	190x90x40mm
Weight	~500g (including battery)	~500g (including battery)	~500g (including battery)

More information



- Power Semiconductors
- Electrical Measurement
- Process Control

Web: www.fastron.com.au  
 9B Lakewood Blvd  
 Braeside VIC 3195 Australia

Email: sales@fastron.com.au  
 Telephone: + 61 - 3 - 97635155  
 Facsimile: + 61 - 3 - 97635206