

## EM4T II

### Energy Meter for On-Board Traction applications





## Energy Measurement for On-Board Applications: EM4T II

With the liberalization and/or privatization of some of the major rail networks, the opportunity for traction units to cross national boundaries now exists, using both the installed base of rail and planned rail networks.

This gave train designers the daunting task to develop multi-system locomotives to be used on the different existing networks.


These prime movers would be needed to operate on the different supply networks of bordering countries along the route without requiring an equipment exchange at the regional or network supply border.

Today, it is therefore technically possible to transfer people or goods throughout Europe, from Norway to Sicily for example, without any physical exchange of the locomotive (Picture 1).

Changes in the Energy Markets in the form of deregulation and increased competition for large user contracts brought potential benefits for those willing to negotiate for their electrical traction supply requirements.

This negotiation however requires greater knowledge and understanding of the load profile of bulk supply points in one of the harshest electrical environments – the traction supply.

With the energy meter from LEM, the data for the precise calculation of both supplied and regenerated energy for billing purposes can be accomplished on the train, independently of the energy supplier.

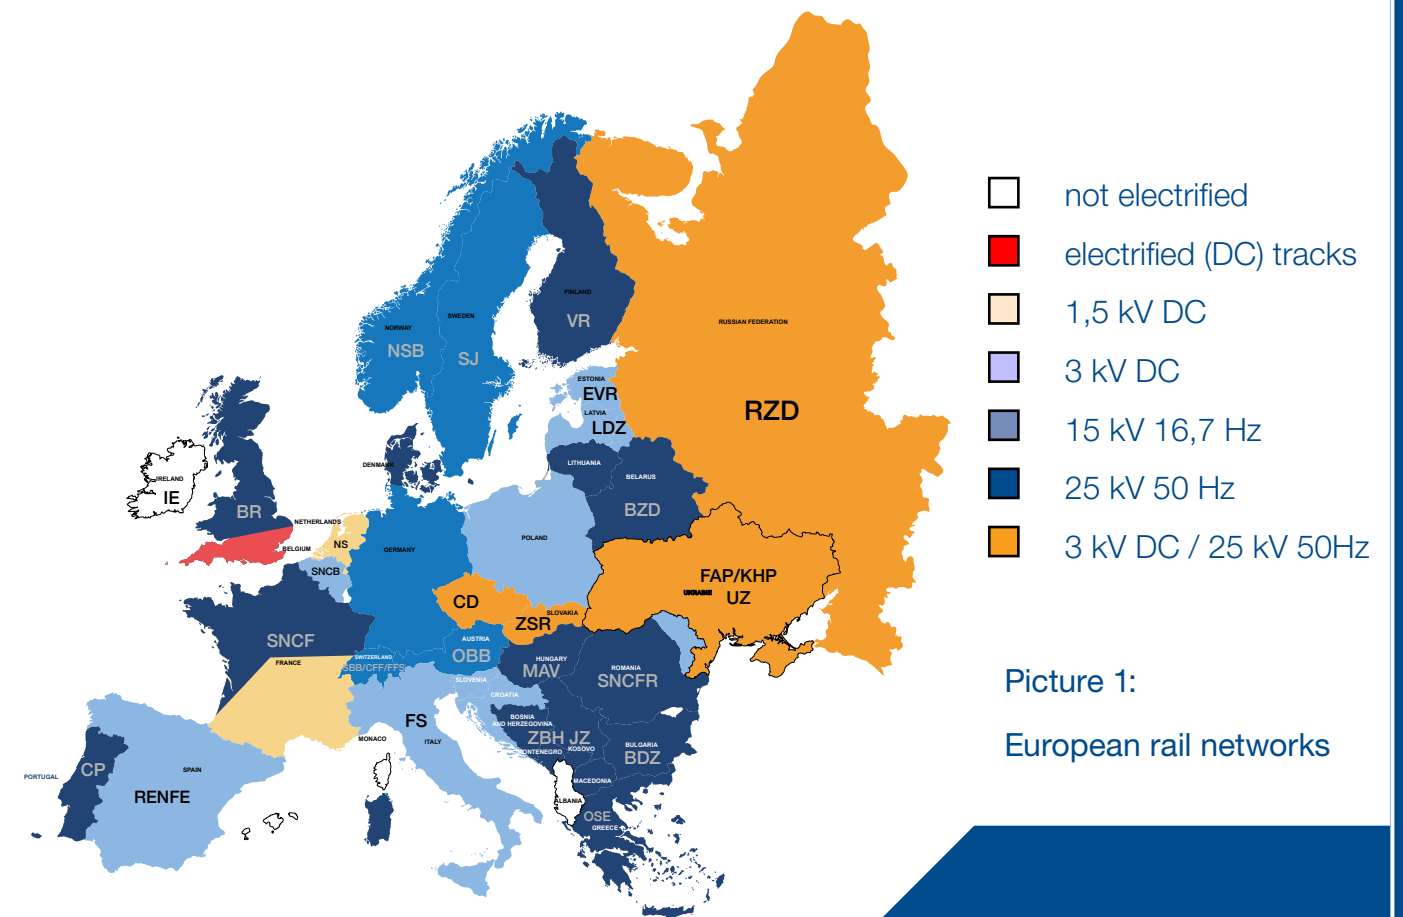

Picture 1:  
European rail networks

## The second generation of universal energy meters for traction especially designed for on-board applications

With the **EM4T II energy meter**, LEM introduced the second generation of universal energy meters for electric traction units with the authorization for billings. Thanks to the advanced capability (such as input channels to connect any actual available current and voltage transducer



Picture 2: EM4T II



Siemens Train

or transformer) of the **EM4T II**, it is used both in new multi-system locomotives and for retrofitting to all types of electrical rail vehicles already in operation. Recently, the new EN 50463 standards define characteristics of energy measurement function (EMF) as well as transducers for current and voltage DC or AC measurement used for EMF. This evolution led LEM to upgrade EM4T to the latest model: **EM4T II**.



## EM4T II - The load profile provider

EM4T II is a single energy meter complying to all the requirements of EN 50463-x & EN 50155 standards for metering and On-Board use, and thus satisfies the requirements of EC Decision 2011/291/EC (TSI “Locomotives and passenger rolling stock”).

EM4T II processes signals from the transformer and electronic converter systems for current and voltage to calculate energy values which are stored as load profile information.

In this load profile (set and stored in intervals of 1, 2, 3, 5, 10 or 15 minutes period length according to the user), the primary energy (delta) values are recorded together with data such as:

- Date and time stamp
- Events
- Train identification numbers
- Absolute energy values for consumption and regeneration of active and reactive energy
- Frequency of the network (16.7 Hz, 50 Hz, 60 Hz or DC)
- Additional “user” load profile like the voltage with a shorter time interval (feature coming in a second design step)
- Position of the train at the time the load profile was stored and/or the event arose
- Further functions, such as voltage detection can be set.

The measured energy information includes separately the consumed and regenerated active and reactive energy and is stored in the load profile memory (at 5 minutes period length) for at least 300 days.

The input variables - current and voltage - are connected to the measuring circuits of the EM4T II via differential inputs (Picture 2 and 3), designed for connection of all current and voltage transducers/transformers currently available on the market.

Four input channels are proposed for metering of both DC and AC signals of any existing traction network (see chart 1).

The EM4T II is suitable for usage in multi-system vehicles. Supply systems 25 kV 50/60 Hz and 15 kV 16.7 Hz, or either 600 V DC, 750 V DC, 1.5 kV DC or 3 kV DC are covered. A system change is detected by the energy meter and stored in the load profile.

The requirements for current measurement at this level can be diverse.

A large aperture transducer is appropriate when the primary conductor is highly isolated to support the high level of voltage (15 to 25 kV AC as nominal level): LEM's ITC Transducer Series is of this category.

For the DC networks, the transducer's inherent isolation properties are adequate.

Analog to Digital Sigma-Delta conversion processors suppress high frequency disturbances in all channels, enhancing even further the capacity to handle the often rapid supply transitions within traction supplies.

The microprocessor reads the sampled values and calculates the real energy in adjustable intervals (standard value = 5 min). The results are then saved in flash memory (a special variant of an EEPROM).

The signals from 2 AC and 2 DC input channels (each for U- and I- input) are used to calculate the energy values. The high-accuracy measurement of the energy value is guaranteed by the digitally sampled signal converter implemented, providing the highest level of temperature and long-term stability.

Optionally, the EM4T II for DC measurement is available in a version with a single voltage input and up to three current inputs to measure the energy consumption for vehicles with multiple power supply points.

The EM4T II has a dedicated RS232 interface input for receiving serial GPS-data messages according to NMEA 0183, including the location data of the energy consumption point. It synchronizes also the internal clock of the meter using the obtained time information.

A log book in full conformity with EN 50463-3 is stored in the EM4T II. This log book information contains e.g. loss and gain of the operating voltage, power up/power down events of the supply voltage, clock synchronization, and the modification of parameters influencing the energy calculating.

Identification data of the vehicle or train are also stored and can be retrieved separately. The self-luminous display of the EM4T II shows cyclically all relevant energy and status information without required operations of a mechanical or optical button.

All measured and stored data can be read out via the RS-type interface (via modem or local).

The interface versions RS232, RS422 or RS485 are available. The applied data communications protocol is IEC 62056-21 and is therefore easily adaptable by all common remote reading systems. In the next version, the EM4T II will also provide an Ethernet-interface.

The supply voltage is selectable between 24 V and 110 V. Optionally, the EM4T II offers a power supply of 12 V for a communication unit (modem).


The operating conditions (considering EMC, temperature, vibration, etc.) meet the special requirements for traction use, including EN 50155, EN 50121-3-2, EN 50124-1, and EN 61373. The compact and fire-retardant enclosure provides protection against the ingress of moisture or foreign objects according IP 65.

## EM4T II Energy meter for On-Board Traction

- Data recording according to EN 50463-x
- Accuracy 0.5R according to EN 50463-2
- Multi-System capability for DC, 16.7 Hz, 50 Hz, 60 Hz
- Supply systems according to EN 50163: 25 kV 50 Hz, 15 kV 16.7 Hz, 600 V DC, 750 V DC, 1.5 kV DC, 3 kV DC
- Measurement of consumed and regenerated active and reactive energy
- For DC optionally with up to 3 DC current channels
- Input for GPS receiver
- Load profile recording including location data
- RS-type interface for data communication
- Ethernet-interface (Available in the next version)

Version	Channel 1	Channel 2	Channel 3	Channel 4
AC	AC-voltage	AC-current		
ACDC	AC-voltage	AC-current	DC-voltage	DC-current
DC	DC-voltage	DC-current		
DCDC	DC-voltage	DC-current	DC-current	
DCDCDC	DC-voltage	DC-current	DC-current	DC-current

Chart 1: EM4T II possible configurations for inputs

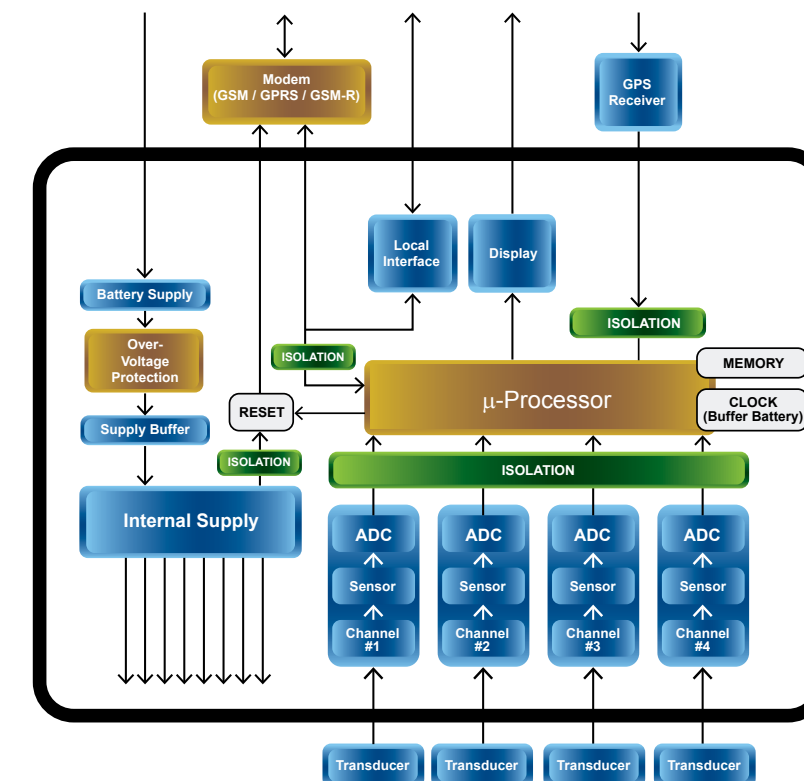

Picture 3: Block diagram of the LEM energy meter


Standards & Regulations

The EM4T II has been designed to comply with the following standards and regulations (excerpt)

EN 50463-x (2012)	Draft: Railway application – Energy measurement on board trains DC measurement Class 2 AC measurement Class 1.5
EN 50155 (2007)	Railway applications – Electronic equipment used on rolling stock
EN 50121-3-2 (2006)	Railway applications - Electromagnetic compatibility - Part 3-2: Rolling stock – Apparatus
EN 61373 (2010)	Railway applications - Rolling stock equipment - Shock and vibration tests
EN 50124-1 (2001)	Railway applications – Insulation coordination – Part 1: Basic requirements
IEC 62056-21 (2002)	Electricity metering - Data exchange for meter reading, tariff and load control - Part 21: Direct local data exchange



ITC 2000...4000-S FAMILY  
Better than Class 0.5R current measurement  
High temperature stability

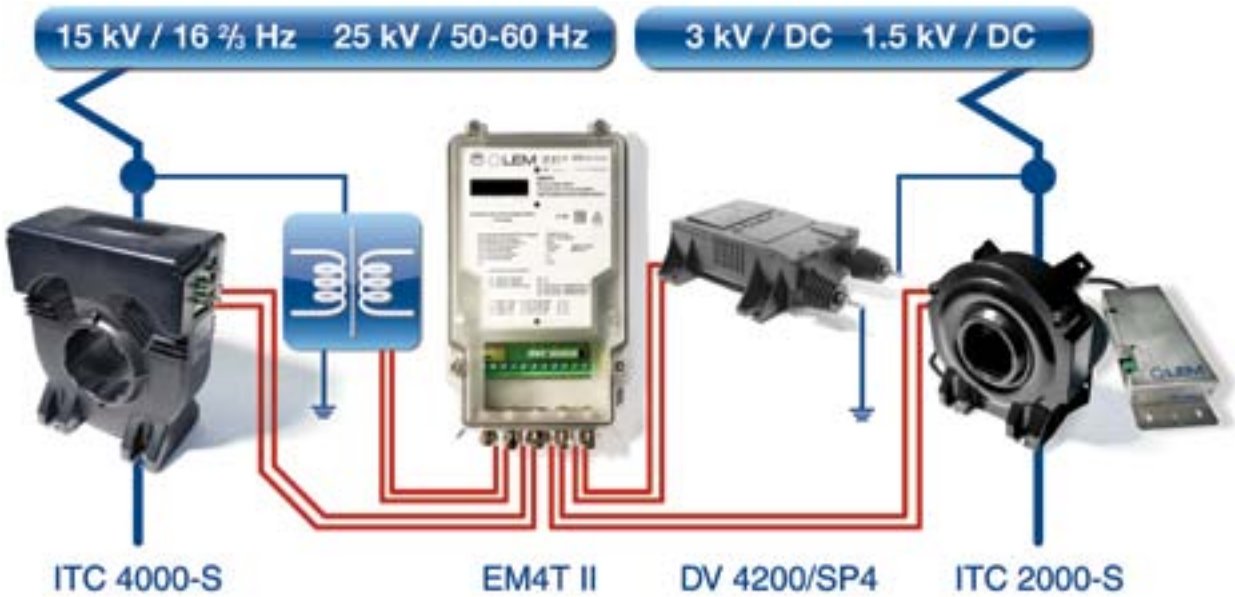

Part of high voltage frame of a multi-system locomotive with the positions needed for current & voltage measurement




DV-VOLTAGE FAMILY  
1200 to 4200 V<sub>RMS</sub>  
One unique compact package  
Class 0.75R accuracy - Low thermal drift


## Technical Data EM4T II

Measuring input channels	<ul style="list-style-type: none"> <li>4 galvanic isolated inputs for connection of U- and I-sensors (either for AC, DC or ACDC), or</li> <li>for connection of one U-sensor (DC) and up to three I-sensors (DCDCDC)</li> </ul>
Measuring ranges	
Rated voltage (secondary)	AC: 70 – 300 V or 17.9 – 100 mA DC: 17.9 – 100 mA
Rated current (secondary)	AC: 1 – 5 A or 25 – 1000 mA DC: 25 – 2000 mA
Accuracy	Class 0.5R (acc. to EN 50463-2)
Sampling interval	4800 Hz
Load profile	<ul style="list-style-type: none"> <li>Recording of consumed and regenerated active and reactive energy</li> <li>units kWh or kvarh</li> <li>recording period length min. 1 minute</li> <li>recording of location and status information acc. to EN 50463-3</li> <li>memory depth at least 60 days (for 1 minute period length)</li> </ul>
Clock accuracy	< 20 ppm
Interfaces	<ul style="list-style-type: none"> <li>1 x RS-interface (bidirectional, RS232, RS422 or RS485) with 2 connections in parallel (screw terminals and pin header), e.g. for modem connection; data protocol according to EN 50463-3 and IEC 62056-21</li> <li>1 x RS232 (unidirectional) for registration of GPS-data telegrams according to NMEA 0183</li> <li>1 x Ethernet-interface (Available in the next version)</li> </ul>
Display	LCD, self-luminous, letter height approx. 4 mm
Degree of protection	IP 65
Supply voltage	24 – 110 V (acc. to EN 50155), power consumption (without modem) 3 W
Supply voltage for modem (optional)	12 V, continuous load 3 W, peak value 6 W Daily modem reset by EM4T II
Temperature ranges	Operating temperature: -40 °C – +75 °C Storage temperature: -40 °C – +85 °C
Dimensions	approx. 165 x 289 x 70 mm (W x H x D)
Weight	approx. 1.5 kg

## Dimensions EM4T II

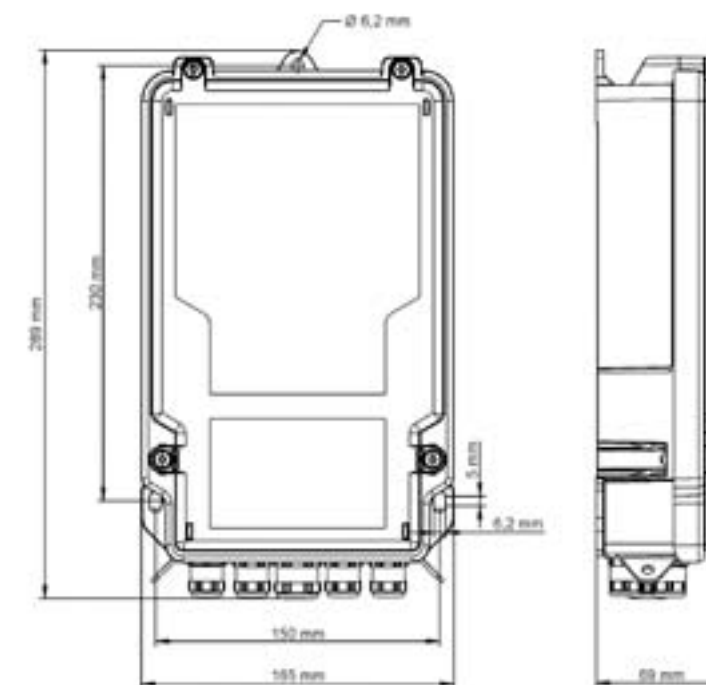

## Terminal block and connections

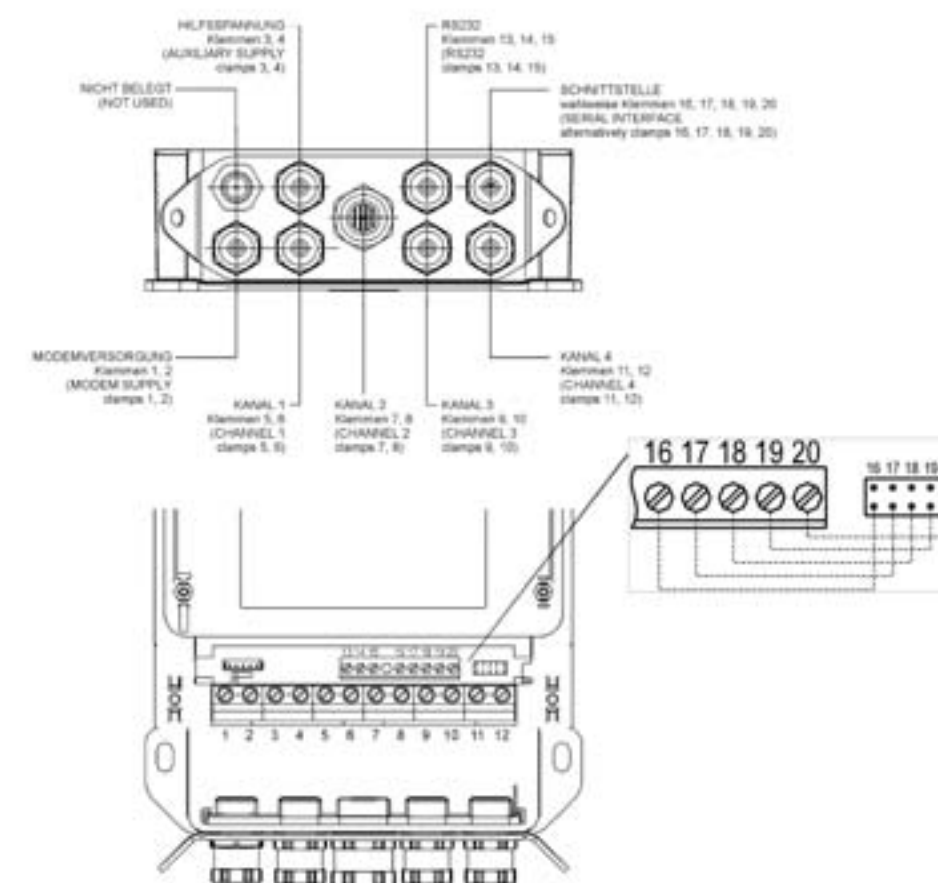




Connection EM4T II

Connectors

13 – GPS (in) - RS232-TxD	16 – RS232-n.c.	RS485-n.c.	RS422-A
14 – GPS (in) - RS232-RxD	17 – RS232-n.c.	RS485-n.c.	RS422-B
15 – GPS (in) - RS232-GND	18 – RS232-TxD	RS485-B	RS422-B'
	19 – RS232-RxD	RS485-A	RS422-A'
	20 – RS232-GND	RS485-GND	RS422-GND
1 – U_Modem + (out)	5 – CH1/U-AC high	9 – CH3/U-DC high	
2 – U_Modem - (out)	6 – CH1/U-AC low	10 – CH3/U-DC low	
3 – U_Batt + (in)	7 – CH2/I-AC high	11 – CH4/I-DC high	
4 – U_Batt - (in)	8 – CH2/I-AC low	12 – CH4/I-DC low	

Display layout

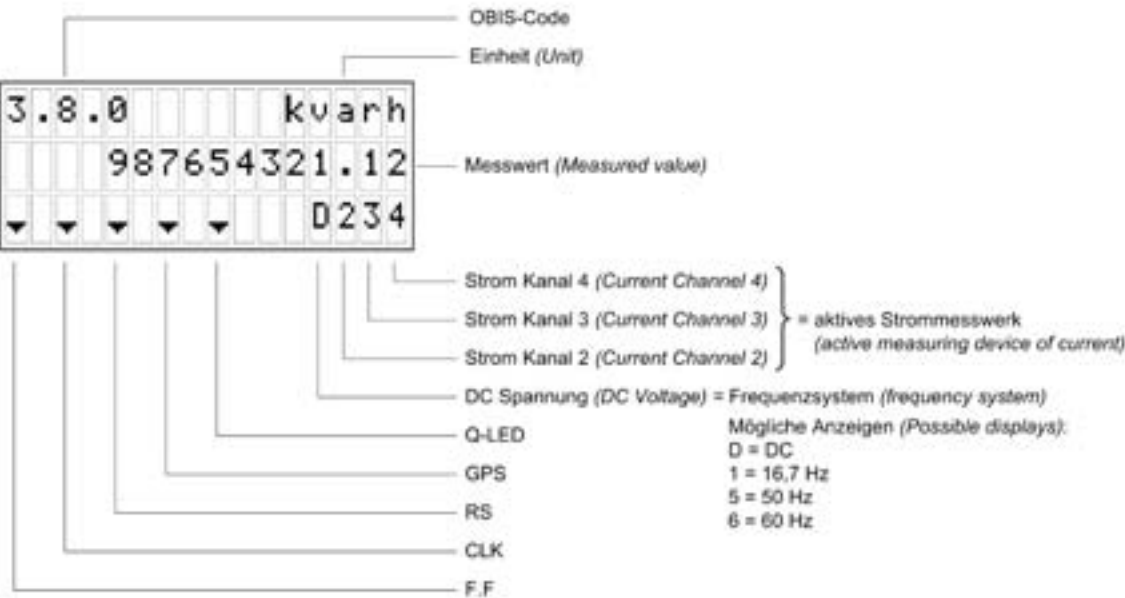

Display of used mains system (possible values):

- 16.7 Hz – Current measurement on Channel 2 (only possible for AC- or ACDC-devices)
- 50 Hz – Current measurement on Channel 2 (only possible for AC- or ACDC-devices)
- 60 Hz – Current measurement on Channel 2 (only possible for AC- or ACDC-devices)
- DC – Current measurement on Channel 4 (only possible for DC- or ACDC-devices)
- DC – Current measurement on Channel 2 (only possible for DCDC- or DCDCDC-devices)
- DC – Current measurement on Channel 3 (only possible for DCDC- or DCDCDC-devices)
- DC – Current measurement on Channel 4 (only possible for DCDCDC-devices)



5 Year Warranty on LEM Transducers

We design and manufacture high quality and highly reliable products for our customers all over the world.

We have delivered several million current and voltage transducers since 1972 and most of them are still being used today for traction vehicles, industrial motor drives, UPS systems and many other applications requiring high quality standards.

The warranty granted on LEM transducers is for a period of 5 years (60 months) from the date of their delivery (not applicable to Energy-meter product family for traction and automotive transducers where the warranty period is 2 years).

During this period LEM shall replace or repair all defective parts at its' cost (provided the defect is due to defective material or workmanship).

Additional claims as well as claims for the compensation of damages, which do not occur on the delivered material itself, are not covered by this warranty.

All defects must be notified to LEM immediately and faulty material must be returned to the factory along with a description of the defect.

Warranty repairs and or replacements are carried out at LEM's discretion.

The customer bears the transport costs. An extension of the warranty period following repairs undertaken under warranty cannot be granted.

The warranty becomes invalid if the buyer has modified or repaired, or has had repaired by a third party the material without LEM's written consent.

The warranty does not cover any damage caused by incorrect conditions of use and cases of force majeure.

No responsibility will apply except legal requirements regarding product liability. The warranty explicitly excludes all claims exceeding the above conditions.

Geneva, 21 June 2011

François Gabella  
President & CEO LEM

June 2011/Version 1

**Austria and CEE**  
LEM Deutschland GmbH  
Office Austria  
Concorde Business Park 2/F/6  
A-2320 Schwechat  
Tel. +43 1 706 56 14-10  
Fax +43 1 706 56 14-30  
e-mail: tbu@lem.com

**Belarus and Baltic Republics**  
DACPOL Sp. z o. o.  
ul. Pulawska 34  
PL-05-500 Piaseczno  
Tel. +48 22 7035100  
Fax +48 22 7035101  
e-mail: dacpol@dacpol.com.pl

**BeNeLux**  
LEM Belgium sprl-bvba  
Egelantierlaan, 2  
B-1851 Humbeek  
Tel. : +32 22 70 30 84  
Fax : +32 22 70 30 85  
e-mail : lbe@lem.com

**Bosnia, Croatia, Herzegovina, Serbia and Slovenia**  
Proteus Electric S.r.l.  
Via di Noghère 94/1  
I-34147 Muggia-Aquilinea  
Tel. +39 040 23 21 88  
Fax +39 040 23 24 40  
e-mail: dino.fabiani@proteuselectric.it

**Bulgaria, Hungary**  
ineltron GmbH  
Hugenottenstr. 30  
D-61381 Friedrichsdorf  
Tel.: +36 20 7711744  
Tel.: +49 (0)6172 598809  
Fax.: +49 (0)6172 75933  
email: i.laszlo@ineltron.hu

**Czech Republic, Slovakia**  
PE & ED, spol. s r.o.  
Koblovská 101/23  
CZ-71100 Ostrava  
Tel. +420 596 239 256  
Fax +420 596 239 531  
e-mail: peedova@peed.cz

**Finland**  
ETRA Electronics Oy  
Lampputie 2  
FI-00740 Helsinki  
Tel. +358 207 65 160  
Fax +358 207 65 23 11  
e-mail: markku.soittila@etra.fi

Field Applications Engineer  
Mr. Pasi Leveälähti  
Kausantie 668, 17150 Uurajärvi  
Tel. +358 50 5754435  
Fax +358 37667 141  
e-mail: pli@lem.com

**France**  
LEM France Sarl  
15, avenue Galois  
F. 92340 Bourg-La-Reine  
Tel. +33 1 45 36 46 20  
Fax +33 1 45 36 06 16  
e-mail: lfr@lem.com

**Germany**  
Central Office:  
LEM Deutschland GmbH  
Frankfurter Strasse 74  
D-64521 Gross-Gerau  
Tel. +49 6152 9301 0  
Fax +49 6152 8 46 61  
e-mail: info-ld@lem.com

**Israel**  
Ofer Levin Technological  
Application  
PO Box 18247  
IL- Tel Aviv 611 81  
Tel. +972 3 5586279  
Fax +972 3 5586282  
e-mail: ol\_teap@netvision.net.il  
ofer.levin@tec-apps.co.il

**Italy**  
LEM Italia Srl  
via V. Bellini, 7  
I-35030 Selvazzano Dentro, PD  
Tel. +39 049 805 60 60  
Fax +39 049 805 60 59  
e-mail: lit@lem.com

**Poland**  
DACPOL Sp. z o.o.  
ul. Pulawska 34  
PL-05-500 Piaseczno  
Tel. +48 22 7035100  
Fax +48 22 7035101  
e-mail: dacpol@dacpol.com.pl

**Portugal**  
QEnergy, Lda  
Centro Empresarial S. Sebastião  
Rua de S. Sebastião Lt 11 n.º 10,  
Albarraque  
2635-448 Rio de Mouro  
Portugal  
Tel. +351 214 309 320  
Fax. +351 214 309 299  
e-mail: qenergia@qenergia.pt

**Romania**  
SYSCOM -18 Srl.  
Calea Plevnei 139B Sector 6  
RO-060011 Bucharest  
Tel. +40 21 310 26 78  
Fax +40 21 316 91 76  
e-mail: george.barbalata@syscom18.com

**Russia**  
Central Office:  
TVELEM  
Str. Staritskoye shosse,15  
170040 Tver / Russia  
Tel./fax: + 7 4822 655672,73  
e-mail: tvelem@lem.com

**Scandinavia**  
LEM Scandinavia  
Regus Tuborg Havn  
Tuborg Boulevard 12, 3rd  
2900 Hellerup, Denmark  
Tel. +45 60 43 1953  
e-mail: kck@lem.com

**Spain**  
LEM France Sarl  
15, avenue Galois  
F-92340 Bourg-la-Reine  
Tel. +34 93 886 02 28  
Fax +34 93 886 60 87  
e-mail: slu@lem.com

**Switzerland**  
SIMPEX Electronic AG  
Binzackerstrasse 33  
CH-8622 Wetzikon  
Tel. +41 44 931 10 30  
Fax +41 44 931 10 31  
e-mail: contact@simpex.ch

LEM International SA  
8, Chemin des Aulx  
P.O. Box 35  
CH-1228 Plan-les-Quates  
Tel. +41 22 706 11 11  
Fax +41 22 794 94 78  
e-mail: lsa@lem.com

**Turkey**  
Özdisan Electronik Pazarlama  
DES Sanayi Sitesi,  
104.Sok.A07 Blok N°:02  
TR-34776 Y.Dudullu  
Umraniye / Istanbul  
Tel. +90 216 420 1882  
Fax +90 216 466 3686  
e-mail: ozdisan@ozdisan.com

**Ukraine**  
"SP DACPOL" Co Ltd.  
Snovskaya str., 20  
UA-02090, KIEV, UKRAINE  
Tel. +380 44 501 93 44  
Tel. +380 44 502 64 87  
e-mail: kiev@dacpol.com

**United Kingdom and Eire**  
LEM UK Ltd  
West Lincs  
Investment Centre  
Whitemoss Business Park  
Skelmersdale, Lancs WN8 9TG  
Tel. +44 (0)1942 388440  
Fax +44 (0)1942 388441  
e-mail: luk@lem.com

**Brazil**  
AMDS4 Imp. Exp. e Com. de  
Equip. Elétricos Ltda.  
Rua Dr. Ulhôa Cintra, 489,  
Piso Superior, Centro 13800-061  
Mogi Mirim - São Paulo - Brazil  
Tel. +55 19 3806 1950 / 8509  
Fax +55 19 3806 8422  
e-mail: jeduardo@amds4.com.br

**South Africa**  
Denver Technical Products Ltd.  
P.O. Box 75810  
SA-2047 Garden View  
Tel. +27 11 626 20 23  
Fax +27 11 626 20 09  
e-mail: denvertch@pixie.co.za

**UNITED STATES OF AMERICA, CANADA, MEXICO**  
Central Office  
LEM U.S.A., Inc.  
11665 West Bradley Road  
Milwaukee, WI 53224  
USA  
Tel. +1 414 353 0711  
Toll free: 800 236 5366  
Fax +1 414 353 0733  
e-mail: lus@lem.com

**Australia and New Zealand**  
Fastron Technologies Pty Ltd.  
25 Kingsley Close  
Rowville - Melbourne -  
Victoria 3178  
Tel. +61 3 9763 5155  
Fax +61 3 9763 5166  
e-mail: sales@fastron.com.au

**China**  
LEM Electronics (China) Co., Ltd.  
No. 28, Linhe Str., Linhe  
Industrial Development Zone  
Shunyi District, Beijing, China  
Post code : 101300  
Tel. +86 10 89 45 52 88  
Fax +86 10 80 48 43 03  
+86 10 80 48 31 20  
e-mail: bj@lem.com

LEM Electronics (China) Co., Ltd.  
Hefei Office, R804,  
Qirong Building, No. 502 Wangjiang  
West Road, High-tech Zone  
Hefei, Anhui, 230022 P.R. China  
Tel. +86 551 530 9772  
Fax. +86 551 530 9773  
e-mail: bj@lem.com

LEM Electronics (China) Co., Ltd.  
Shanghai Office, R510,  
Hualian Development Mansion,  
No. 728 Xinhua Road  
Changning District  
Shanghai, 200052, P.R. China  
Tel. +86 21 3226 0881  
Fax +86 21 5258 2262  
e-mail: bj@lem.com

LEM Electronics (China) Co., Ltd.  
Shenzhen Office  
R1205, LianTai Mansion, Zhuzilin  
Shennan Avenue, Futian District,  
Shenzhen 518040 P.R. China  
Tel. +86 755 3334 0779  
+86 755 3336 9609  
Fax. +86 755 3334 0780  
e-mail: bj@lem.com

LEM Electronics (China) Co., Ltd.  
Xi'an Office  
R703, Tower A  
Jinqiao International Plaza  
No. 50, Technology Road  
High-tech District, Xi'an,  
Shanxi, 710075 P.R. China  
Tel. +86 29 8833 7168  
Fax +86 29 8833 7158  
e-mail: bj@lem.com

**India**  
LEM Management Services Sarl-  
India Branch Office  
Mr. Sudhir Khandekar  
Level 2, Connaught Place,  
Bund Garden Road, Pune-411001  
Tel. +91 20 4014 7575  
Mobile +91 98 3313 5223  
e-mail: skh@lem.com

**GLOBETEK**  
No.122, 27th Cross,  
7th Block, Jayanagar,  
Bangalore-560070-INDIA  
Tel. +91 80 2663 5776  
+91 80 2664 3375  
Fax. +91 80 2653 4020  
e-mail: sales@globetek.in

**Japan**  
LEM Japan K.K.  
2-1-2 Nakamachi  
J-194-0021 Machida-Tokyo  
Tel. +81 42 725 81 51  
Fax +81 42 728 81 19  
e-mail: lj@lem.com

LEM Japan K.K.  
Nagoya Sales Office  
1-14-24-701 Marunouchi,  
Naka-ku, Nagoya  
460-0002 Japan  
Tel. +81 52 203 8065  
Fax +81 52 203 8091  
e-mail: lj@lem.com

**Korea**  
S&H Trading  
Rm.302 Eopmu A-dong,  
Chungang Yutong, 1258,  
Gurobon-dong, Guro-gu,  
Seoul, 152-721, Korea  
Tel. +82 2 2686 83 46  
+82 2 2613 83 45  
Fax. +82 2 2686 83 47  
e-mail: snh@hinodekorea.co.kr

Young Woo Ind., Co.  
#608 Penterium IT Tower,  
282 Hakeui-ro, Dongan-gu,  
Anyang-si, Gyeonggi-do  
South Korea, 431-810  
Tel. +82 31 266 8856  
Fax +82 31 266 8857  
e-mail: info@ygwoo.co.kr

**Taiwan**  
POWERTRONICS CO. LTD  
The Tapei SUN-TECH  
Technology Park  
10th Floor, No. 205-2, Section 3,  
Beixin Road, Xindian City,  
Taipei County  
23143, Taiwan, R. O. C.  
Tel. +886 2 7741 7000  
Fax +886 2 7741 7001  
e-mail: sales@powertronics.com.tw

Tope Co., Ltd.  
3F-4, 716 Chung Cheng road  
Chung Ho City, Taipei Hsien,  
Taiwan 235, R.O.C.  
Tel. +886 2 8228 0658  
Fax +886 2 8228 0659  
e-mail: tope@ms1.hinet.net



LEM International SA  
8, Chemin des Aulx, P.O. Box 35  
CH-1228 Plan-les-Quates  
Tel. +41 22 706 11 11, Fax +41 22 794 94 78  
e-mail: lsa@lem.com; www.lem.com

Publication PTE130219/1

Distributor