


Applications

-Multifunction time relay can be used for electrical appliances, control of lights, heating, motors, pumps and fans (10 functions, 10 time ranges, multi-voltage).

Feature

- 10 functions: - 8 time functions controlled by supply voltage
- 2 time functions controlled by control input
- Comfortable and well-arranged function and time-range setting by rotary switches.
- Time scale 0.1 s - 10 days divided into 10 ranges.
- Relay status is indicated by LED.
- 1-MODULE,DIN rail mounting.

Model and connotation

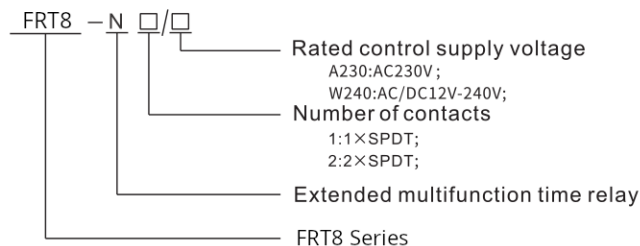

Technical parameters

	FRT8-N1	FRT8-N2
Function	A,As,Aw,B,Bs,Bw,Cs,Ds,Fe,Js	
Supply terminals	A1-A2	
Voltage range	AC/DC 12-240V(50-60Hz)	
Burden	AC 0.09-3VA/DC 0.05-1.7W	
Voltage range	AC 230V(50-60Hz)	
Power input	AC max.6VA/1.3W	AC max.6VA/1.9W
Supply voltage tolerance	-15%;+10%	
Supply indication	green LED	
Time ranges	0.1s-10days,ON,OFF	
Time setting	potentionmeter	
Time deviation	10%-mechanical setting	
Repeat accuracy	0.2%-set value stability	
Temperature coefficient	0.05%/°C,at=20°C(0.05%/°F, at=68°F)	
Output	1×SPDT	2×SPDT
Current rating	1×16A(AC1)	2×16A(AC1)
Switching voltage	250VAC/24VDC	
Min.breaking capacity DC	500mW	
Output indication	red LED	
Mechanical life	1×10 ⁷	
Electrical life(AC1)	1×10 ⁵	
Reset time	max.200ms	
Operating temperature	-20°C to +55°C (-4°F to 131°F)	
Storage temperature	-35°C to +75°C (-22°F to 158°F)	
Mounting/DIN rail	Din rail EN/IEC 60715	
Protection degree	IP40 for front panel/IP20 terminals	
Operating position	any	
Overvoltage cathegory	III.	
Pollution degree	2	
Max.cable size(mm ²)	solid wire max.1×2.5or 2×1.5/with sleeve max.1×2.5(AWG 12)	
Dimensions	90×18×64mm	
Weight	1×SPDT:W240-62g,A230-60g	
	2×SPDT:W240-82g,A230-81g	
Standards	EN 61812-1,IEC60947-5-1	

Functions Diagram


A:On delay (Power On)

When relay Un is powered on, the relay starts to delay, and the output contact is closed after delay t. After the relay Un is de energized, the output contact R is disconnected and the S control signal is invalid in this function mode.




As:On delay (S rising edge start)

The relay Un is in the energized state. When the S control signal is triggered, the relay starts to delay. After the delay t, the output contact R is closed and held. During the delay period, if the signal is triggered again, restart the delay. When the relay Un is de energized, the relay output contact R opens.




Aw:On delay (S trigger time accumulation)

When the relay Un is energized and the cumulative delay during the closing of S control signal reaches t, The output contact R is closed.




B:Interval (Power On)

When relay Un is powered on, the relay output contact R will be closed immediately and start delay. After delay t, the output contact R will be disconnected. If the delay time t does not arrive and relay Un is powered off, the output contact R will be disconnected, and the S control signal is invalid in this function mode.




Bs:Off delay(S rising edge trigger start)


The relay Un is in the energized state. When the S control signal is connected, the output contact R of the relay is closed and starts to delay. After the delay t, the output contact R is disconnected. If the S control signal is connected again during the delay, the delay t is cleared and delayed again.



Time Range



Wiring Diagram

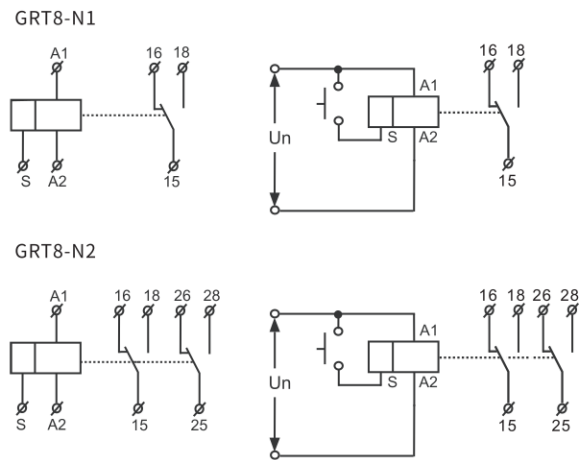

Bw:Off delay(S trigger time accumulation)

When the relay Un is powered on, the the output contact R is closed. When the cumulative delay during the closing of S control end reaches t, The output contact R is open.




Cs:Repeat Cycle (Starting Off ,S rising edge start)

The relay Un is in the energized state. When the S control signal is closed, the relay starts to delay and is input after a delay time t, The output contact R is closed, and after the delay time t, the output contact R of the relay is disconnected, This cycle will repeat until relay Un is de energized.



Ds:Repeat Cycle (Starting On ,S rising edge trigger start)

The relay Un is in the energized state. When the S control signal is closed, the relay output contact R closes and start delay, the output contact R is disconnected after delay t, and the relay output contact R is closed after delay t, This cycle will repeat until relay Un is de energized.




Fe:On and off delay (Triggered by rising and falling edges of S)

The relay Un is in the energized state. When the S control signal is connected, the output contact R closed and starts to delay, with a delay of t the output contact R open. When the S control signal is disconnected, the output contact is closed and starts to delay, with a delay of t the output contact R open.



Js:Pulse output (Triggered by rising edge of S)

The relay Un is in the energized state. when the S control signal is connected, the relay starts to delay, with a delay of t, the relay output contact R is closed for 1 second and then the output contact R open.



Dimensions(mm)

