


PBW planar beam load cell

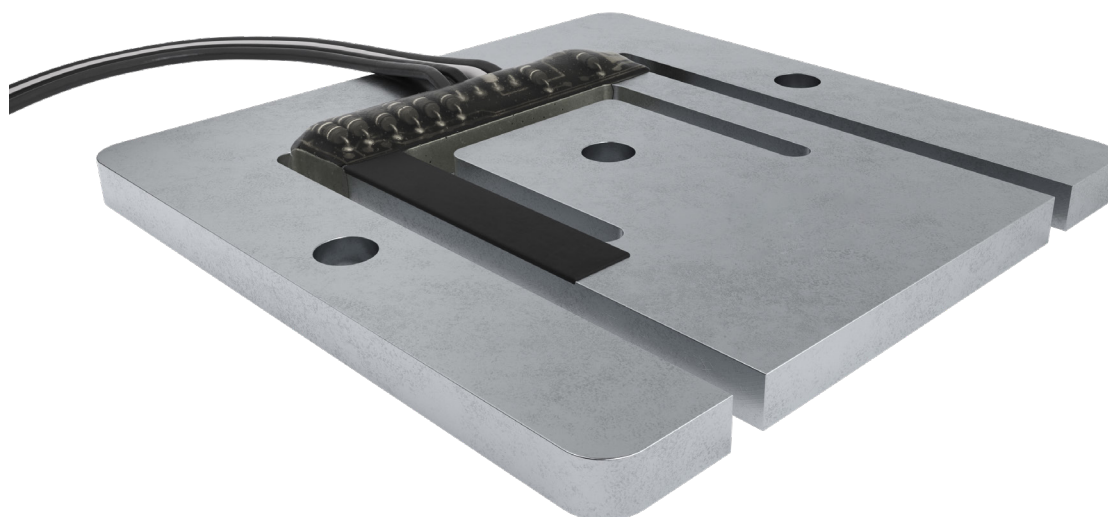

product description

The PBW planar beam is an OIML certified load cell for use in ultra-low profile weighing equipment.

The planar beam is designed to be used as an alternative to a single point load cell – hence 3 or 4 units are required for each application. Optimum accuracy is ensured with mounting locations outboard of the sensing section. Constructed from aluminium and environmentally protected using potting material. The PBW is available in a range of capacities – from 12.5lb(5.7kg) through to 330.7lb (150kg).

applications

Retail scales, bench scales, medical equipment, test & measurement applications.

approvals

OIML approval to C3 (Y = 7,500). G3 for 330.7lb (150kg) model.

accessories

Load mounts

Compatible range of electronics

key features

Ultra-low profile

Wide range of capacities from 12.5lb (5.7kg) to 330.7lb (150kg)

1,000Ω strain gauge bridge for battery powered devices

Aluminium construction

Environmentally sealed by potting

High accuracy

High input resistance

Calibration in mV/V/Ω for accuracy class C3



RoHS
compliant



UK
CA



 **flintec**

specifications

Maximum capacity ($E_{\max}$)	lb	12.5 / 18,75 / 25 / 37.5 / 50 / 100 / 240*	330.7
Metric equivalent (1 lb=0.45359 kg)	kg	5.7 / 8.5 / 11.3 / 17 / 22.7 / 45.4 / 109*	150
Accuracy class according to OIML R60		(GP)	C3
Maximum number of verification intervals ($n_{\max}$)		n.a.	3,000
Minimum load cell verification interval ($v_{\min}$)		n.a.	$E_{\max} / 7,500$
Temperature effect on minimum dead load output (TC_0)	%*RO/10°C	± 0.0400	± 0.0187
Temperature effect on sensitivity (TC_{RO})	%*RO/10°C	± 0.0200	± 0.0100
Combined error	%*RO	± 0.0500	± 0.0200
Non-linearity	%*RO	± 0.0400	± 0.0166
Hysteresis	%*RO	± 0.0400	± 0.0166
Creep error (30 minutes) / DR	%*RO	± 0.0600	± 0.0166
Rated Output (RO)	mV/V	$1 \pm 10\% / 1.2 \pm 10\%$	$0.9 \pm 0.1\% / 1.09 \pm 0.1\%$
Calibration in mV/V/ Ω	%	n.a.	± 0.05
Zero balance	%*RO	± 5	$\leq \pm 5$
Excitation voltage	V	5...15	5...15
Input resistance (R_{LC})	Ω	$1,180 \pm 50$	$1,180 \pm 50$
Output resistance (R_{out})	Ω	$1,000 \pm 10$	$1,000 \pm 100$
Insulation resistance (100 V DC)	M Ω	$\geq 5,000$	$\geq 5,000$
Safe load limit (E_{lim})	%* $E_{\max}$	300 / 250*	230
Ultimate load	%* $E_{\max}$	400	300
Safe side load	%* $E_{\max}$	200	200
Compensated temperature range	°C	-10...+40	-10...+40
Operating temperature range	°C	-10...+65	-10...+65
Load cell material	-	aluminium	aluminium
Sealing	-	potted	potted
Protection according EN 60 529	-	IP65	IP65


Packet weight	g	35 (12.5lb), 45 (18.75lb), 41 (25lb), 50 (37.5lb), 50 (50lb), 70 (100lb), 88 (240lb)	-
---------------	---	---	---

The limits for Non-Linearity, Hysteresis, and TC_{R0} are typical values.

The sum of Non-linearity, Hysteresis and TC_{R0} meets the requirements according to OIML R60 with $p_{LC}=0.7$.

* - Safe load limit is 250% of E_{max} for the 240lb (109kg) model.

product dimensions (mm)

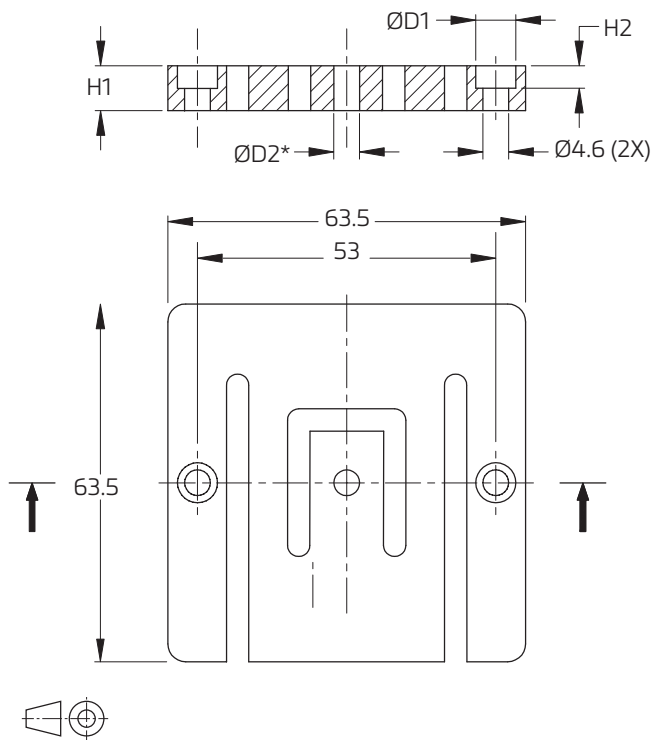

Type	H1	H2	ØD1	ØD2*	Deflection (mm) at E_{max}
12.5 lb	2.5	--	--	4.2	0.42
18.75 lb	4	--	--	4.2	
25 lb	3.2	--	--	4.2	0.49
37.5 lb	4	--	--	6.2	0.38
50 lb	4	--	--	6.2	0.48
100 lb	6.4	--	--	6.2	
240 lb	8	3.2	7.4	8.2	0.46
330.7 lb	10.1	3.2	7.4	8.2	0.46


Other loading holes on request.

wiring

The load cell is provided with a 4-conductor ribbon cable and TE Connectivity connector housing P/N 104257-4 with compatible crimp contacts, or equivalent.

Cable length: 1.0m for 12.5...50 lb
1.5m for 100...240 lb
2m for 330.7 lb

A special junction box type KPB-4 is available

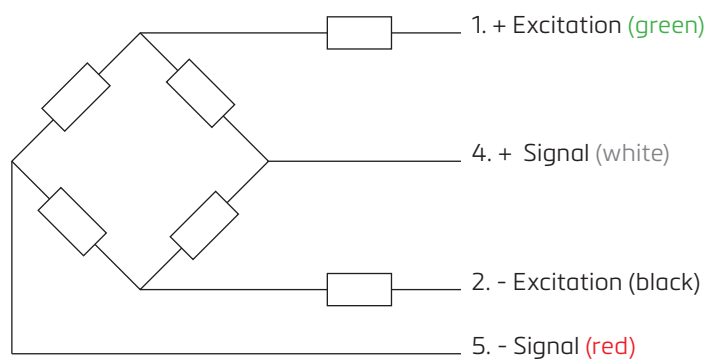

Specifications and dimensions are subject to change without notice.