



ECO SILENCER INFINITY

PREMIUM UNDERLAYMENT



AMBIENT SOUND (STC) = 73
IMPACT SOUND (IIC) = 70
 Δ IIC = 25



Perfect for Pad
Attached Flooring



Best Moisture
Protection



Sound
Reduction



Compression
Resistant



Insulating
Value



Environmentally
Friendly

MUST HAVE: ECO SILENCER INFINITY ∞

WHY? My floor has a pad attached.

An absolute must. Firm cushion, enhanced joint support, superior acoustics and unparalleled protection from moisture's harmful effects. The silver film "BLOCKS OUT" the moisture from the subfloor that could damage the flooring.

Fully warranted.

INFINITE VALUE TO YOUR INVESTMENT!


Do not go with the bare minimum.

Underlayment for the best support / moisture protection / sound absorption for your floors

**DESIGNED, APPROVED AND WARRANTED
FOR USE WITH PAD ATTACHED FLOORING**

Also suitable for use with:

- Floating LVT, WPC, SPC, Hybrid resilient floors
- Glue down LVT and carpet tiles
- Floating laminates
- Glue down and nail down engineered wood
- Bamboo wood
- Nail down solid hardwood



MADE IN
THE U.S.A.



The Silencer™

**Foam
Products
CORPORATION**

Foam Products • 350 Beamer Road • Calhoun, Georgia 30701
800-526-3626 • fax 706-625-0855 • www.foamproducts.com


ECO SILENCER INFINITY ∞ PREMIUM UNDERLAYMENT

Foam Products recommends Eco Silencer Infinity Premium Underlayment for the best support, moisture protection, and sound absorption for floating LVT, WPC, SPC, Hybrid resilient floors, plus glue down LVT and carpet tiles, floating laminates, glue down and nail down engineered wood, bamboo wood and nail down solid hardwood.



EXCEPTIONAL SOUND ABSORPTION

Foam Products's Eco Silencer Infinity is made with high-density polyurethane foam that reduces impact and ambient floor noise by providing exceptional sound absorption.

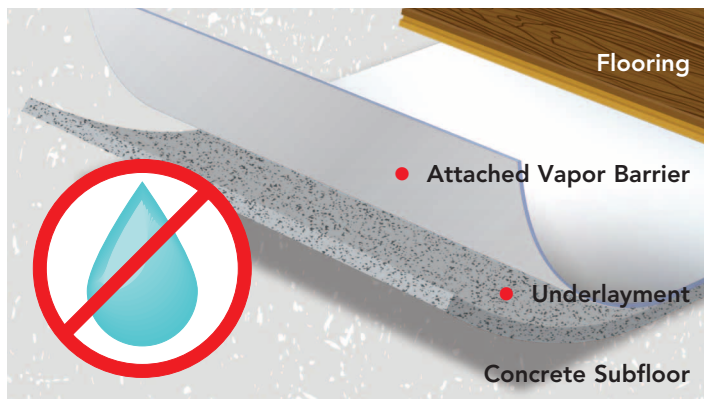

SUPERIOR MOISTURE PROTECTION

New revolutionary **moisture barrier film** offers the best moisture protection, bond strength, and durability.

ADVANTAGES

- Eco Silencer Infinity is made with high-density polyurethane foam using rapidly renewable resources (soybean polyols and vegetable oils)
- Suitable for floating LVT, WPC, SPC, Hybrid resilient floors, plus glue down LVT, floating laminates, glue down and nail down engineered wood, bamboo wood and nail down solid hardwood.
- Approved for use with pad-attached flooring.
- Contains an anti microbial treatment that ensures protection from the growth of unwanted microbes and resists mold and mildew
- Crushpruf™ technology resists indentation that enables your floors to perform to its fullest potential and last a lifetime
- Eliminates minor subfloor imperfections
- Offers the industry's best limited lifetime warranty
- Suitable for radiant heat flooring systems
- This product exceeds ASTM test for compression strength required for some vinyl plank manufacturers

FLOOR PREPARATION

- Subfloor should be clean, dry and level
- Follow the manufacturer's installation instructions for any additional preparation


INSTALLATION METHODS

Can be installed in Floating, Glue down, and Nail down applications


TECHNICAL DATA

100% High-Density polyurethane foam underlayment blended with post consumer recycled granulated rubber tires and bonded with a silver foil film to "BLOCK" out moisture vapor.

Thickness.....	1.2mm
Density.....	30 lbs./cu.ft.
Weight	2.1 oz/sq.ft.
Antimicrobial	Contains treatment
Thermal Resistance.....	R-Value .17
Compression Resistance ASTM D3676.....	77.8 psi
Compression Set ASTM D3574	2.4 %
Indoor Air Quality	GreenGuard Gold Certified UL 2818
Flammability Rating	Passes Federal Flammability Standards DOC-FF-1-70
Smoke Density	Passes, 110 max
Product Emissions.....	Exceeds VOC emissions requirements, environmentally friendly



FILM SIDE UP
when applying to concrete.
Tape the seams with 2" tape

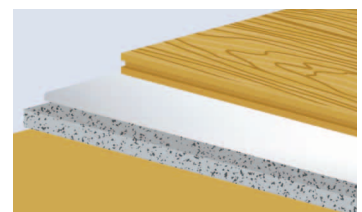

FILM SIDE UP
when applying to wood subfloor.
Do NOT tape the seams