


A B C D E F G H

REV	DESCRIPTION	DATE
-----	-------------	------

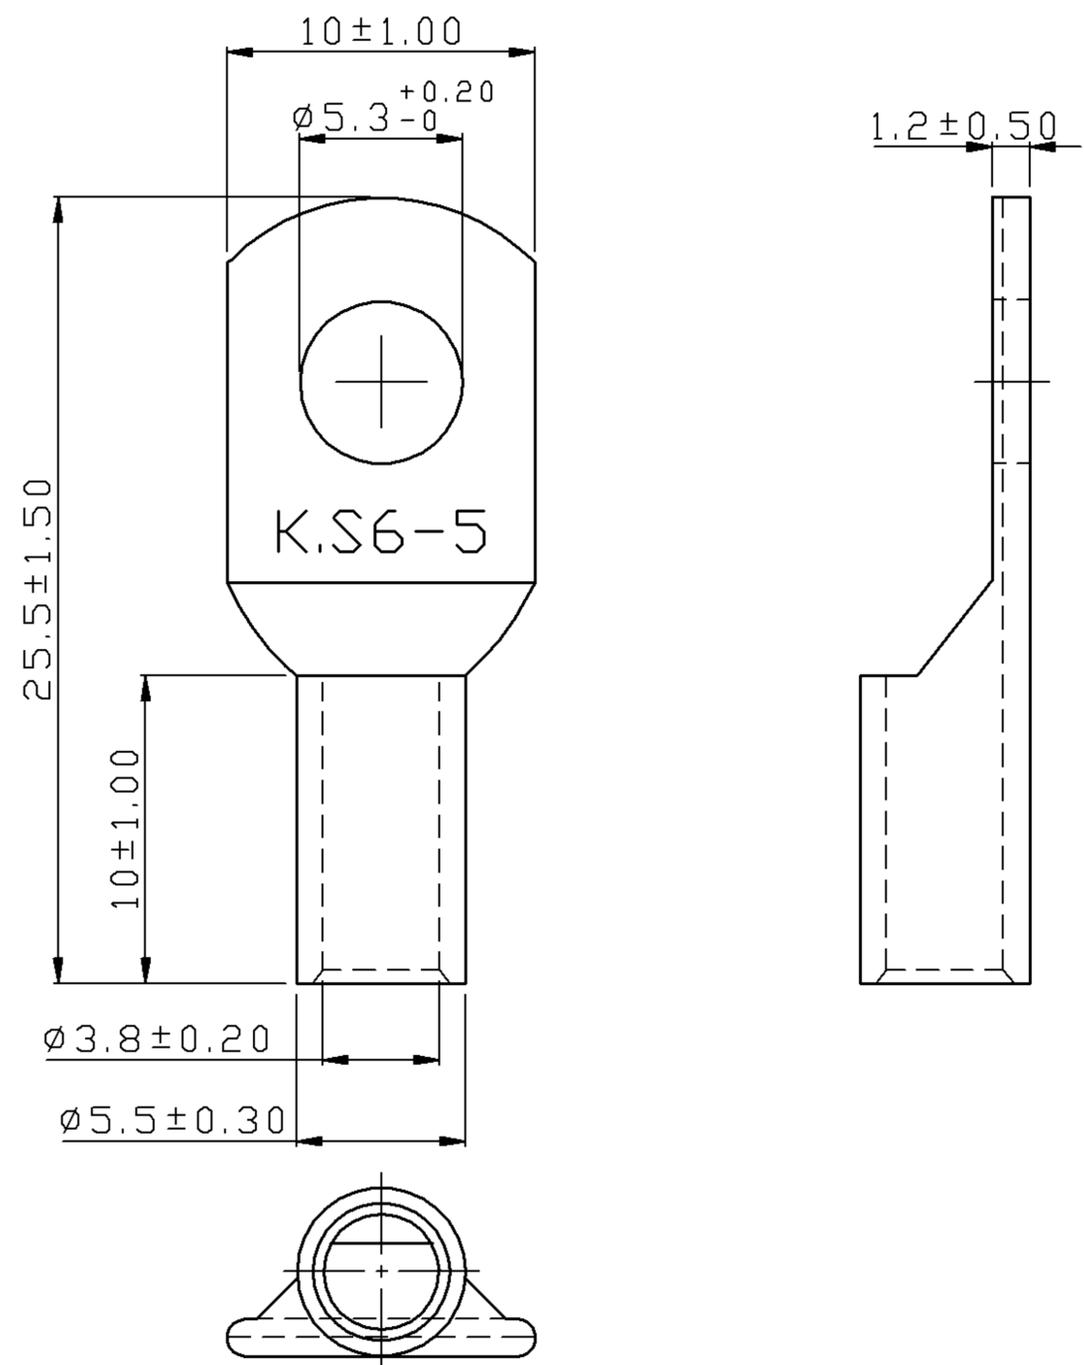

- NOTE :
1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	12	10	
AMP.	35	50	
 2. WIRE RANGE : 12-10 A.W.G. (4 - 6 mm²)
 3. SURFACE TREATMENT : TIN PLATED
 4. THICKNESS : 0.85 mm

Tolerance Unless Otherwise Specified		
0 > 6 mm ± 0.20	ANGLE	
6 > 18 mm ± 0.30	0° >	° REF ±
18 > 30 mm ± 0.40	>	° ±
30 > 75 mm ± 0.50	>	° ±

NAME	NON-INSULATED COPPER TUBULAR LUGS(TL SERIES)			UNIT	
PART NO.	TL6-5	MATERIAL	COPPER TUBULAR	APPROVE	
NUMBER	KT-96186-C	SCALE	SHEET PAGE	CHECKED	
DATE	2008/10/01	3/1	1-0 10F2	DRAWN	張馨尹

KST. K.S. TERMINALS INC.

A B C D E F G H