


A B C D E F G H

REV	DESCRIPTION	DATE
-----	-------------	------

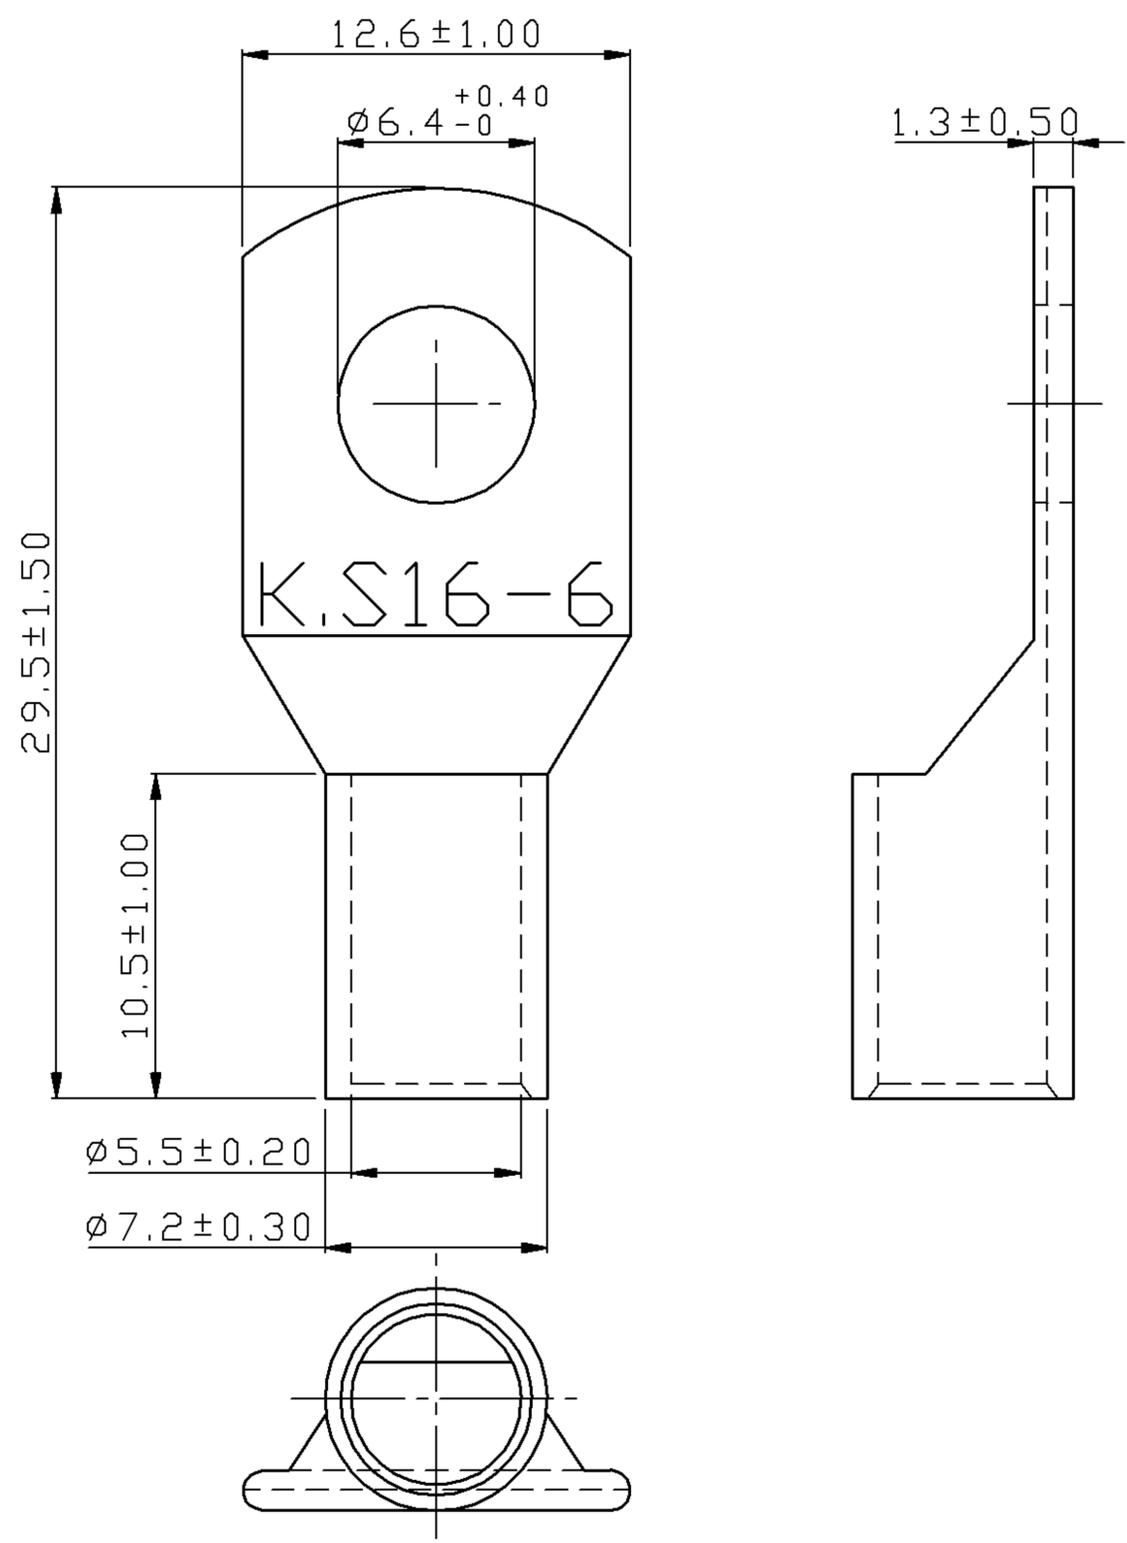

- NOTE :
1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	6		
AMP.	95		
 2. WIRE RANGE : 6 A.W.G. (16 mm^2)
 3. SURFACE TREATMENT : TIN PLATED
 4. THICKNESS : 0.85 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° > ° REF \pm
18 > 30 mm ± 0.40	° > ° \pm
30 > 75 mm ± 0.50	° > ° \pm

NAME	NON-INSULATED COPPER TUBULAR LUGS(TL SERIES)			UNIT	
PART NO.	TL16-6	MATERIAL	COPPER TUBULAR	APPROVE	
NUMBER	KT-96207-C	SCALE	SHEET PAGE	CHECKED	
DATE	2007/03/02	3/1	1-0 10F2	DRAWN	謝耿彰

KST. K.S. TERMINALS INC.

A B C D E F G H