

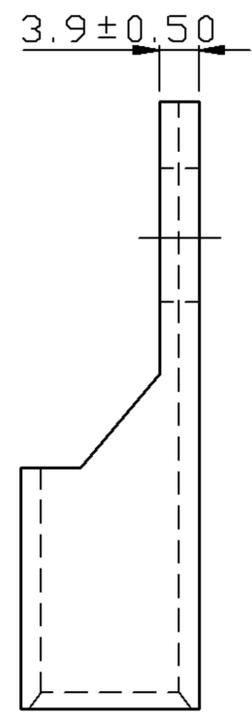


A B C D E F G H

REV	DESCRIPTION	DATE
-----	-------------	------

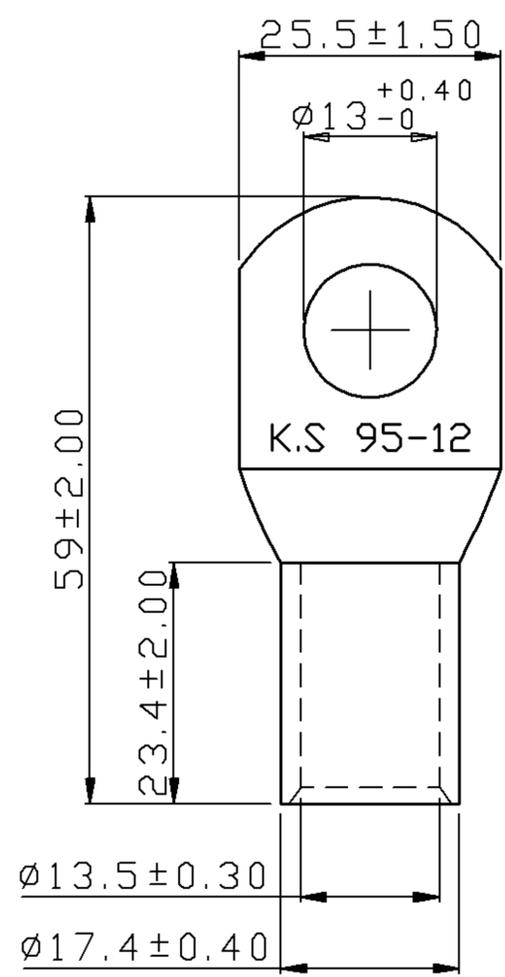

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

MCM	3/0		
AMP.	310		
2. WIRE RANGE : 3/0 MCM (95 mm²)
3. SURFACE TREATMENT : TIN PLATED
4. THICKNESS : 1.95 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° > ° REF ±
18 > 30 mm ± 0.40	° ±
30 > 75 mm ± 0.50	° ±

NAME	NON-INSULATED COPPER TUBULAR LUGS(TL SERIES)			UNIT	
PART NO.	TL95-12	MATERIAL	COPPER TUBULAR	APPROVE	
NUMBER	KT-96520-C	SCALE	SHEET PAGE	CHECKED	
DATE	2008/10/01	1/1	1-0 10F2	DRAWN	張馨尹

KST. K.S. TERMINALS INC.

A B C D E F G H