


REV	DESCRIPTION	DATE
-----	-------------	------

△ RDK-95014

張馨尹 2006/01/18

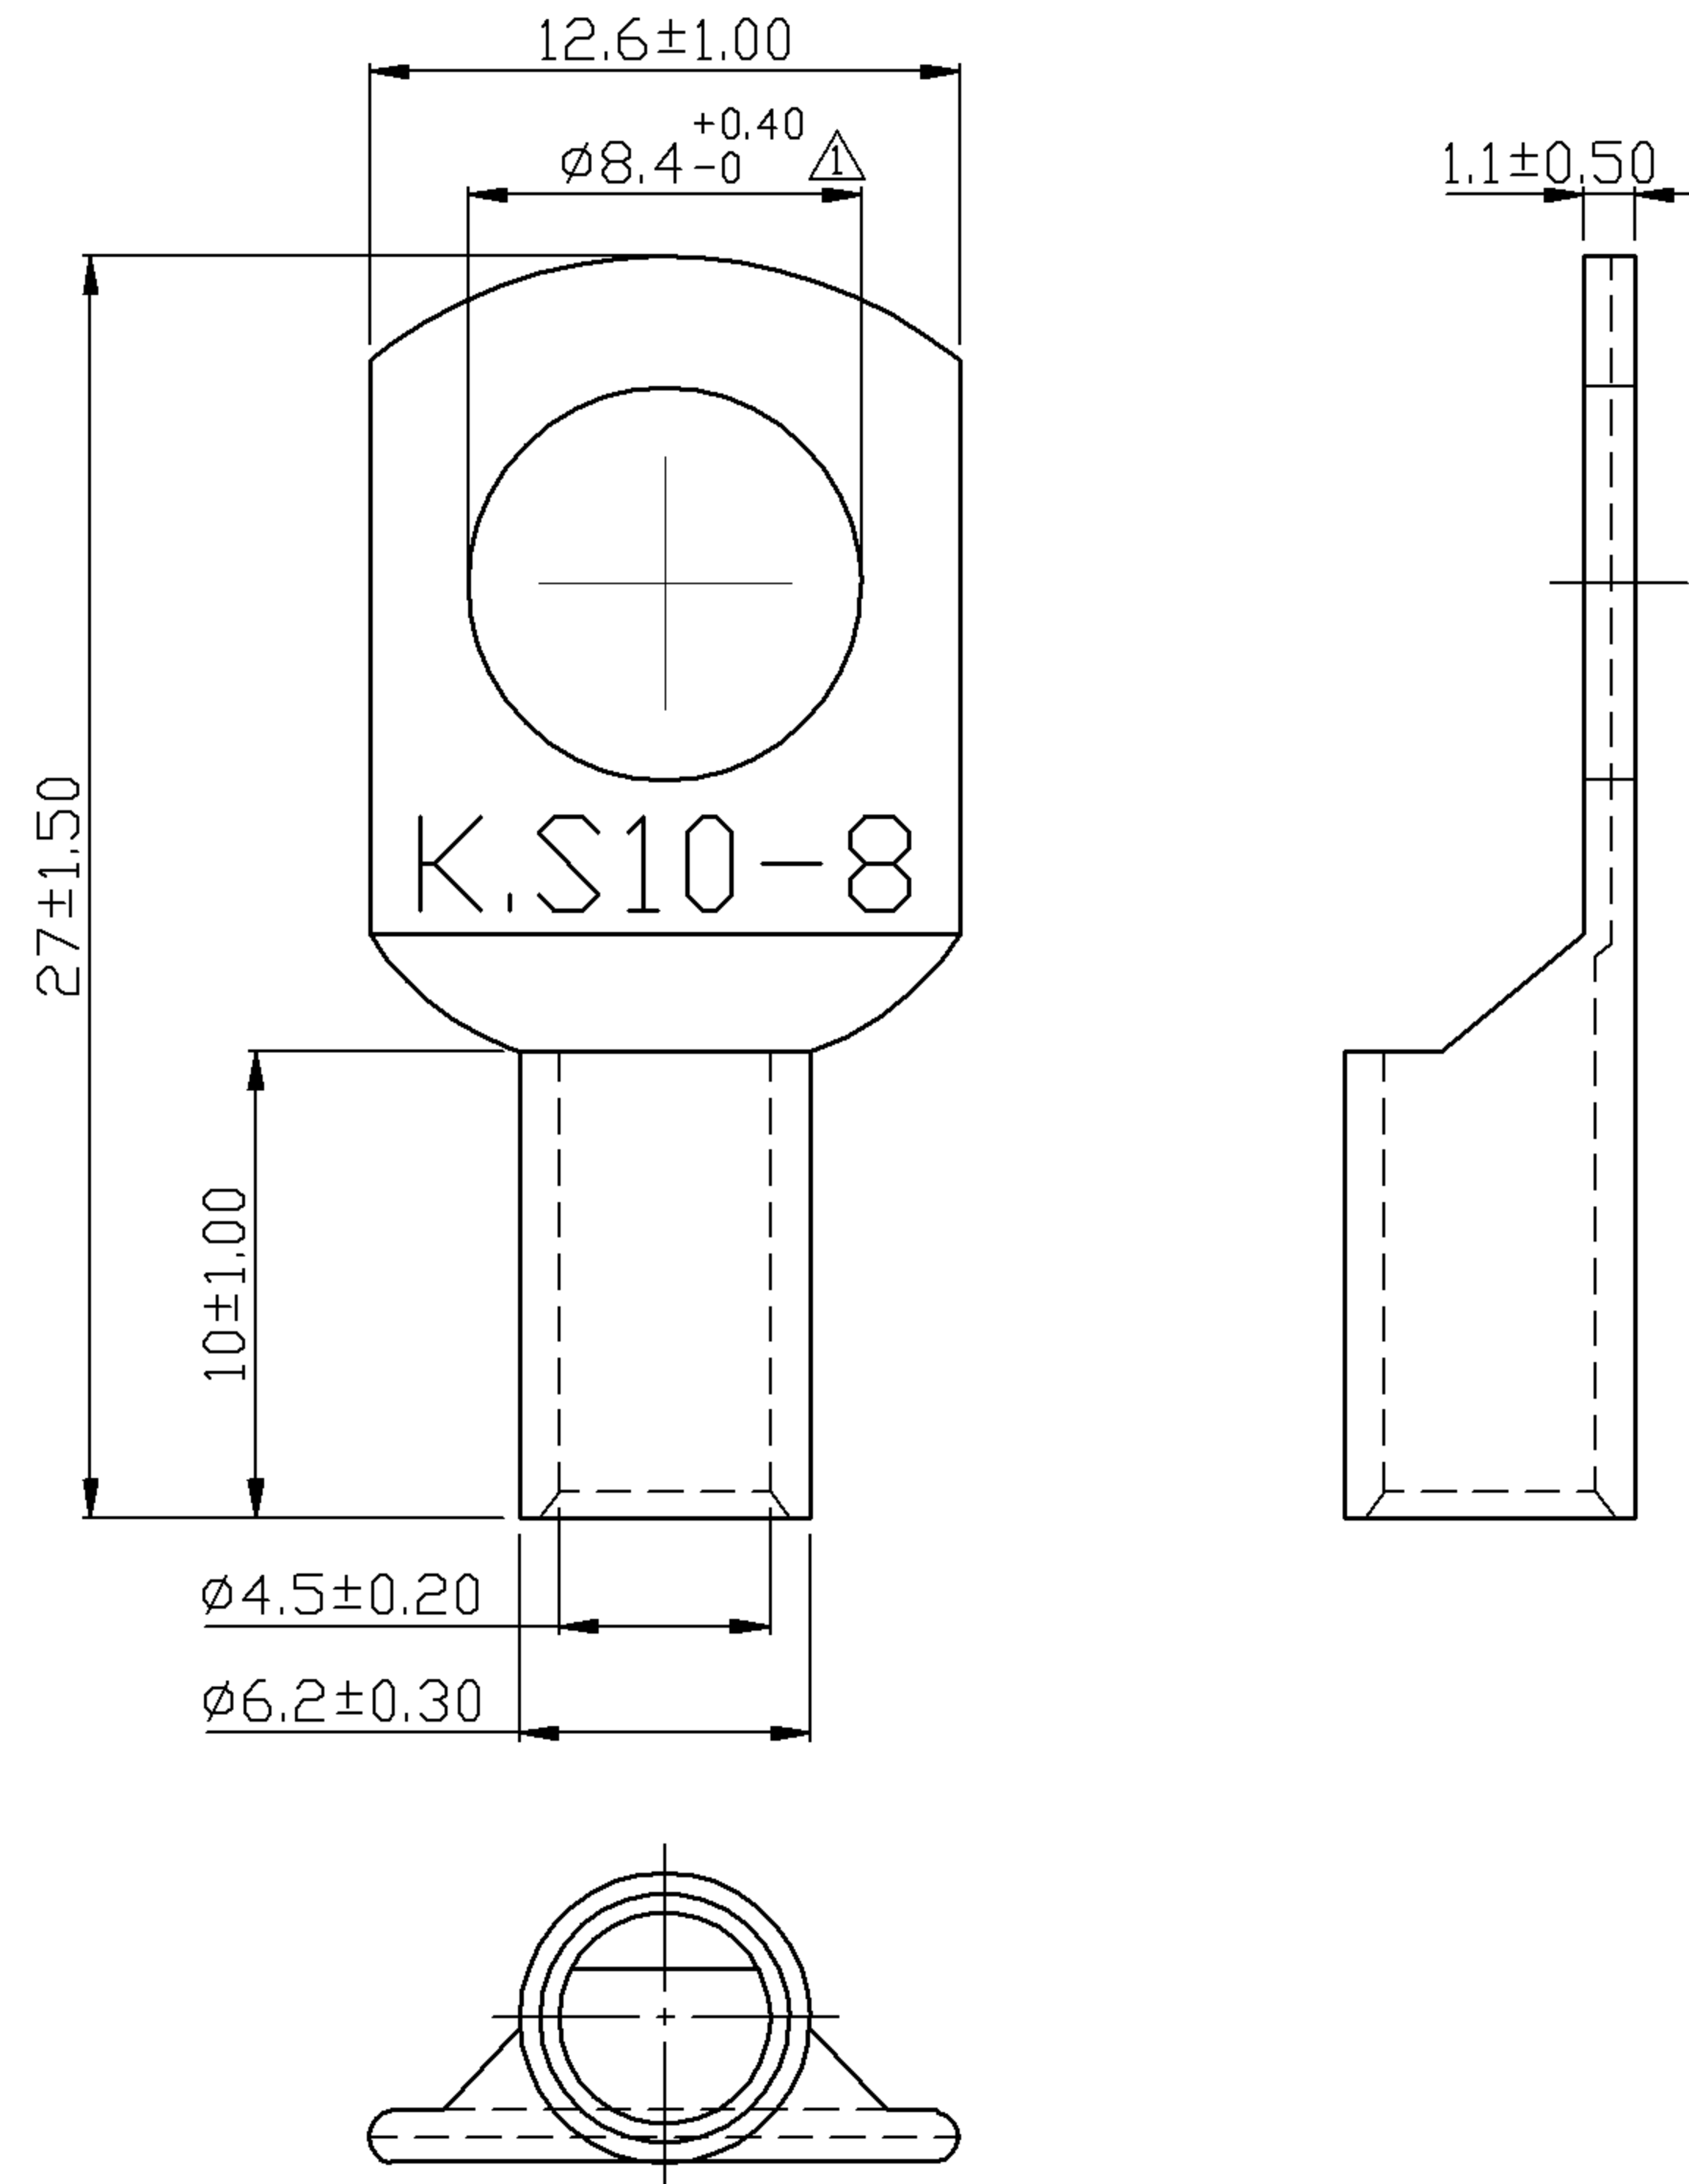

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	8		
AMP.	70		
2. WIRE RANGE : 8 A.W.G. < 10 mm²
3. SURFACE TREATMENT : TIN PLATED
4. THICKNESS : 0.85 mm

Tolerance Unless Otherwise Specified			
0 > 6 mm	± 0.20	ANGLE	
6 > 18 mm	± 0.30	0° > °	REF ±
18 > 30 mm	± 0.40	° > °	±
30 > 75 mm	± 0.50	° > °	±

NAME	NON-INSULATED COPPER TUBULAR LUGS(TL SERIES)			UNIT	
PART NO.	TL10-8	MATERIAL	COPPER TUBULAR	APPROVE	
NUMBER	KT-95950-C	SCALE	SHEET	PAGE	CHECKED
DATE	2006/12/26	3/1	1-1	10F2	DRAWN

KST. K.S. TERMINALS INC.