



A B C D E F G H

REV	DESCRIPTION	DATE
-----	-------------	------

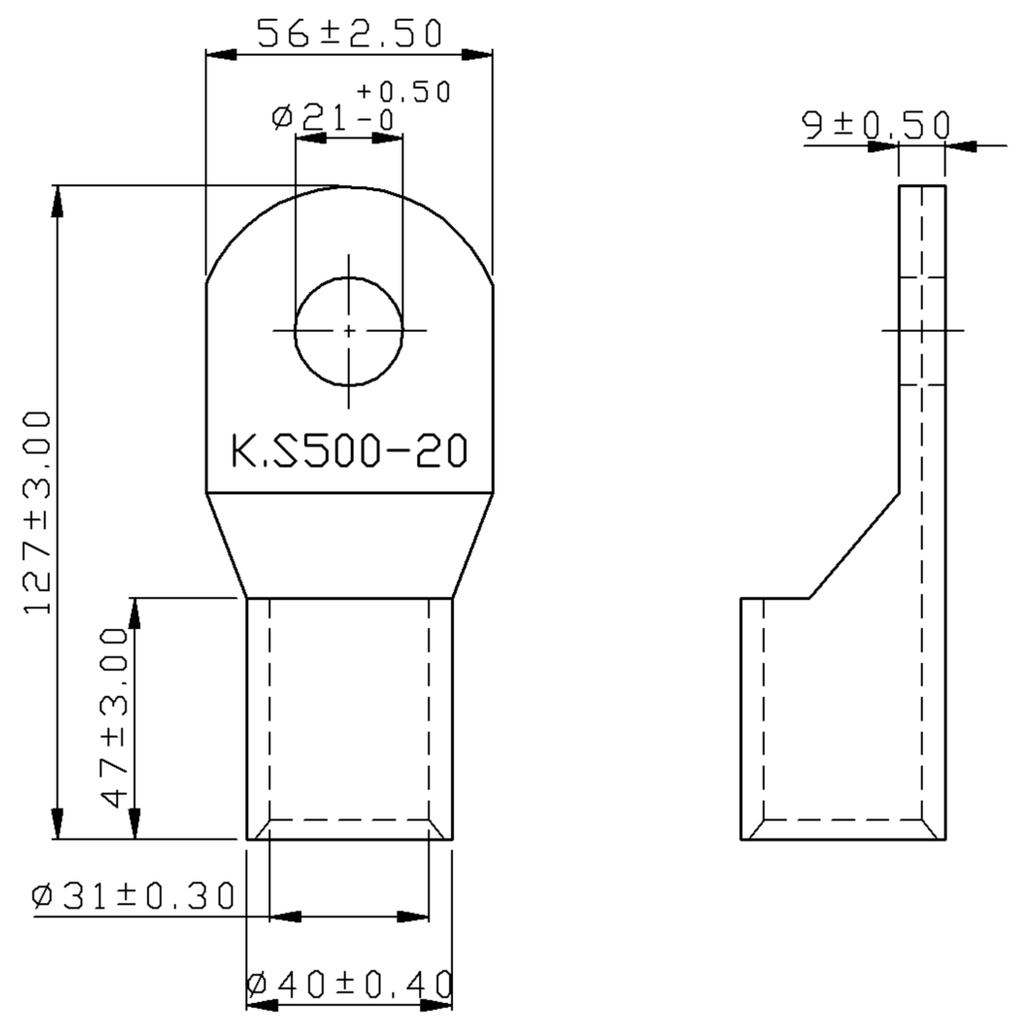

- NOTE :
1. MAXIMUM ELECTRIC CURRENT :

MCM	800	1000	
AMP.	815	870	
 2. WIRE RANGE : 800/1000 MCM (500 mm²)
 3. SURFACE TREATMENT : TIN PLATED
 4. THICKNESS : 4.50 mm



Tolerance Unless Otherwise Specified		
0 > 6 mm	±0.20	ANGLE
6 > 18 mm	±0.30	0° > ° REF ±
18 > 30 mm	±0.40	° > ° ±
30 > 75 mm	±0.50	° > ° ±

NAME	NON-INSULATED COPPER TUBULAR LUGS(TL SERIES)			UNIT	
PART NO.	TL500-20	MATERIAL	COPPER TUBULAR	APPROVE	
NUMBER	KT-970076-C	SCALE	SHEET PAGE	CHECKED	
DATE	2008/09/30	1/2	1-0 10F2	DRAWN	張馨尹

KST. K.S. TERMINALS INC.

A B C D E F G H