


A B C D E F G H

REV	DESCRIPTION	DATE
-----	-------------	------

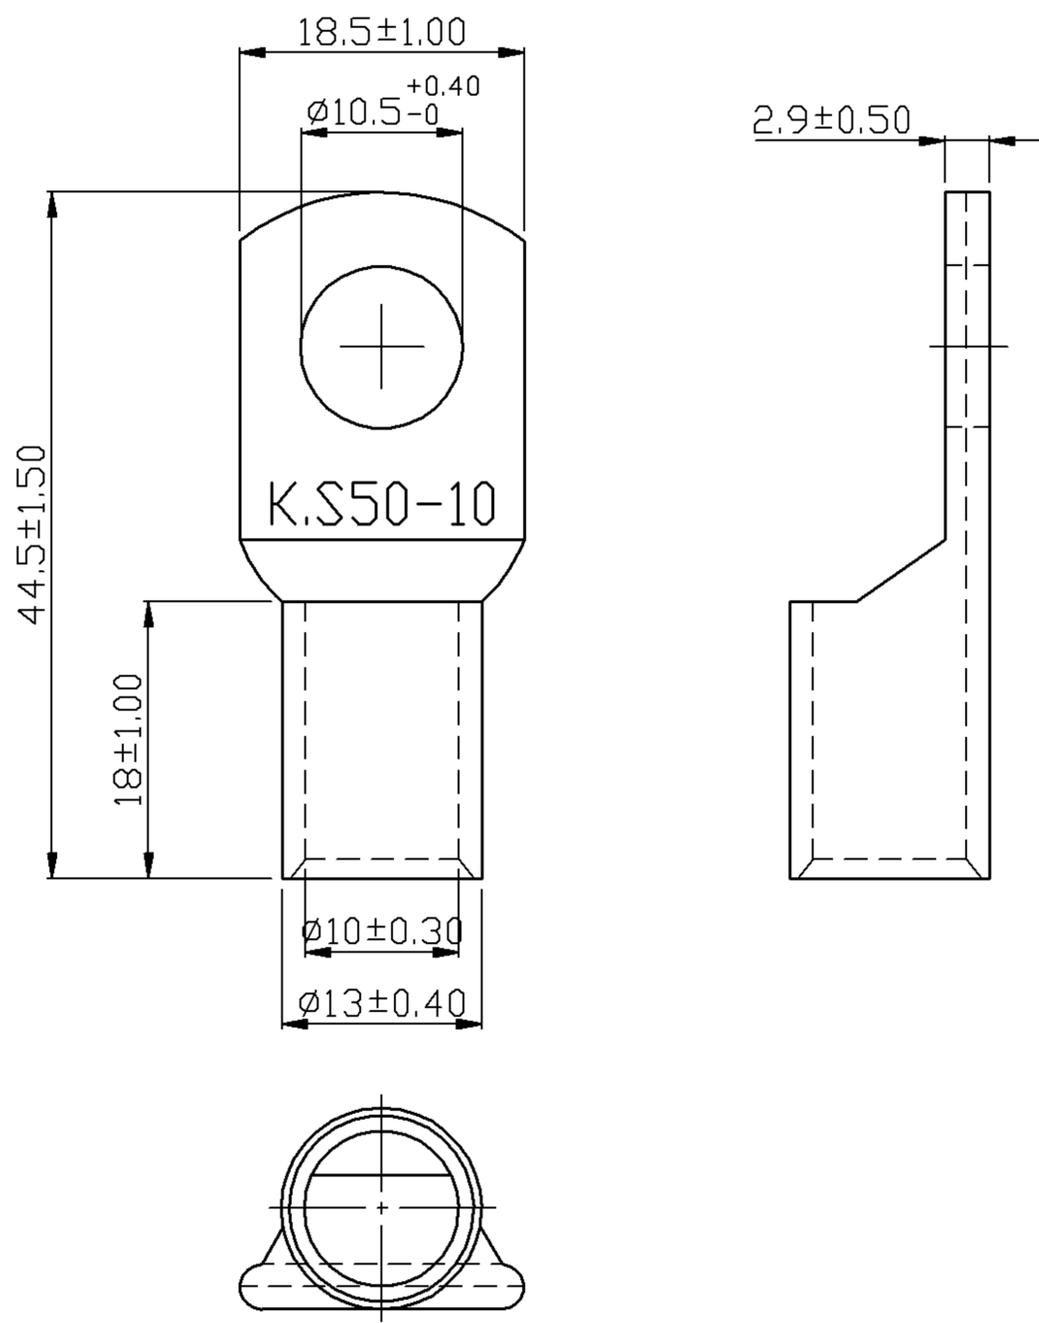

- NOTE :
1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	1/0		
AMP.	230		
 2. WIRE RANGE : 1/0 A.W.G. (50 mm²)
 3. SURFACE TREATMENT : TIN PLATED
 4. THICKNESS : 1.45 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° > ° REF ±
18 > 30 mm ± 0.40	° ±
30 > 75 mm ± 0.50	° ±

NAME	NON-INSULATED COPPER TUBULAR LUGS(TL SERIES)			UNIT	
PART NO.	TL50-10	MATERIAL	COPPER TUBULAR	APPROVE	
NUMBER	KT-95669-C	SCALE	SHEET PAGE	CHECKED	
DATE	2008/09/30	1.5/1	1-0 10F2	DRAWN	張馨尹

KST. K.S. TERMINALS INC.

A B C D E F G H