


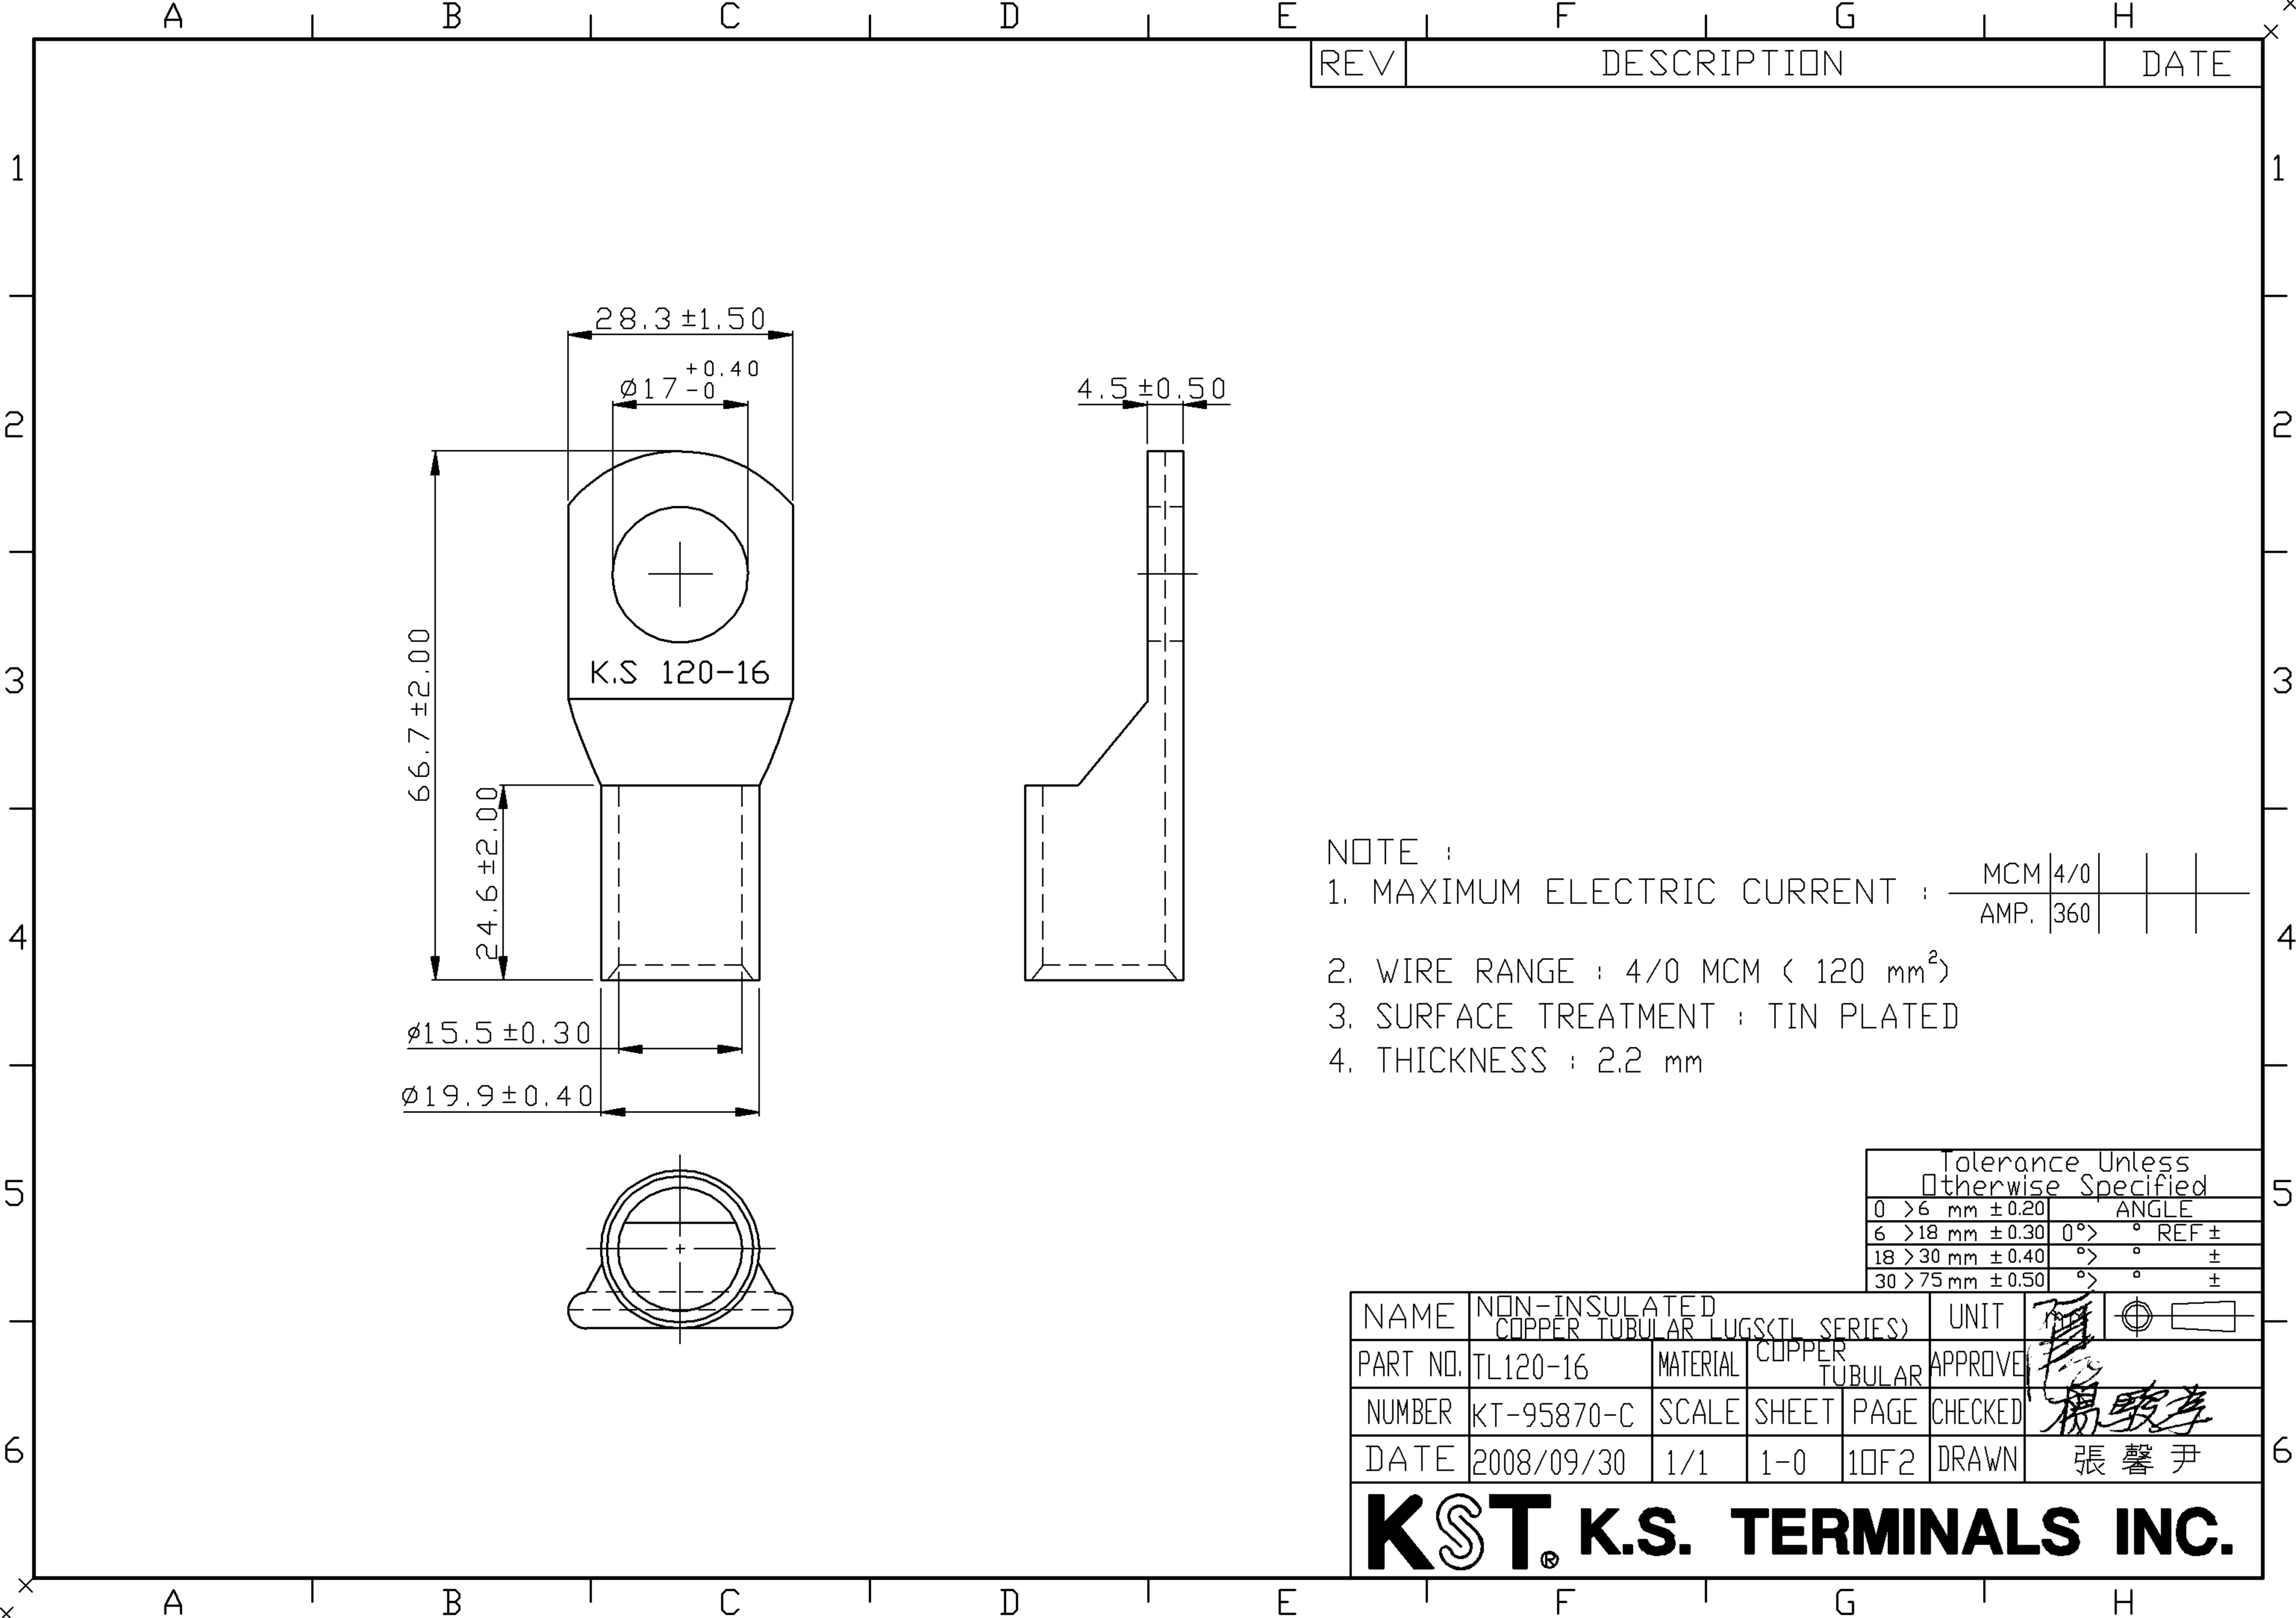

REV	DESCRIPTION	DATE
-----	-------------	------

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

MCM	4/0		
AMP.	360		

2. WIRE RANGE : 4/0 MCM (120 mm²)

3. SURFACE TREATMENT : TIN PLATED

4. THICKNESS : 2.2 mm

Tolerance Unless Otherwise Specified			
0 > 6 mm	± 0.20	ANGLE	
6 > 18 mm	± 0.30	0° > °	REF ±
18 > 30 mm	± 0.40	° > °	±
30 > 75 mm	± 0.50	° > °	±

NAME	NON-INSULATED COPPER TUBULAR LUGS(TL SERIES)			UNIT	mm	
PART NO.	TL120-16	MATERIAL	COPPER TUBULAR	APPROVE		
NUMBER	KT-95870-C	SCALE	SHEET	PAGE	CHECKED	
DATE	2008/09/30	1/1	1-0	10F2	DRAWN	張馨尹

KST. K.S. TERMINALS INC.