


REV	DESCRIPTION	DATE
△	RDK-94233	張馨尹 2005/11/14
△	RDK-96120	張馨尹 2008/09/30

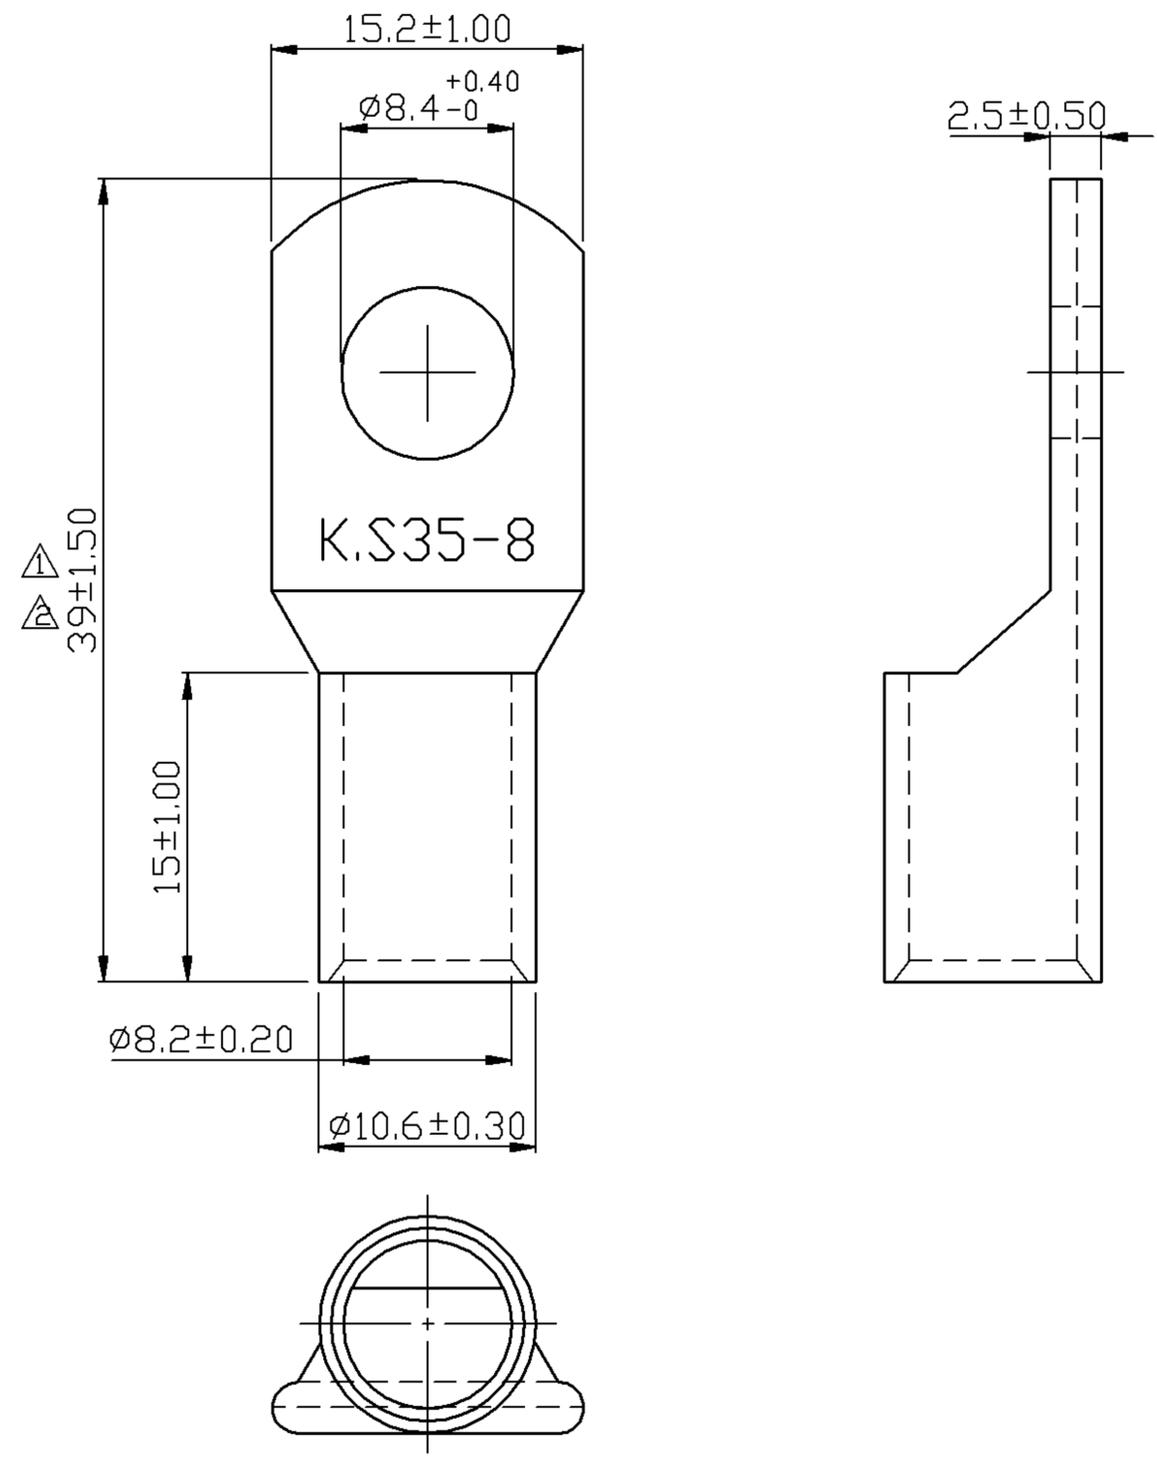

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	2		
AMP.	170		
2. WIRE RANGE : 2 A.W.G. (35 mm²)
3. SURFACE TREATMENT : TIN PLATED
4. THICKNESS : 1.2 mm

Tolerance Unless Otherwise Specified		
0 > 6 mm	± 0.20	ANGLE
6 > 18 mm	± 0.30	0° > ° REF ±
18 > 30 mm	± 0.40	° > ° ±
30 > 75 mm	± 0.50	° > ° ±

NAME	NON-INSULATED COPPER TUBULAR LUGS(TL SERIES)			UNIT	個
PART NO.	TL35-8	MATERIAL	COPPER TUBULAR	APPROVE	張馨尹
NUMBER	KT-95952-C	SCALE	SHEET PAGE	CHECKED	楊駿孝
DATE	2007/02/08	2/1	1-2 10F2	DRAWN	張馨尹

KST. K.S. TERMINALS INC.