
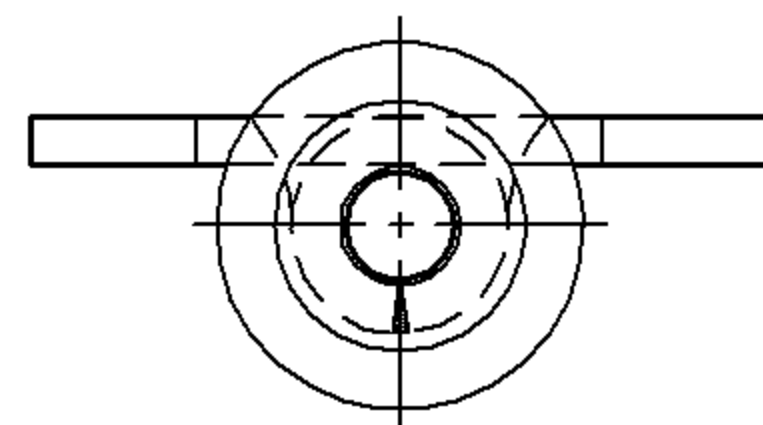


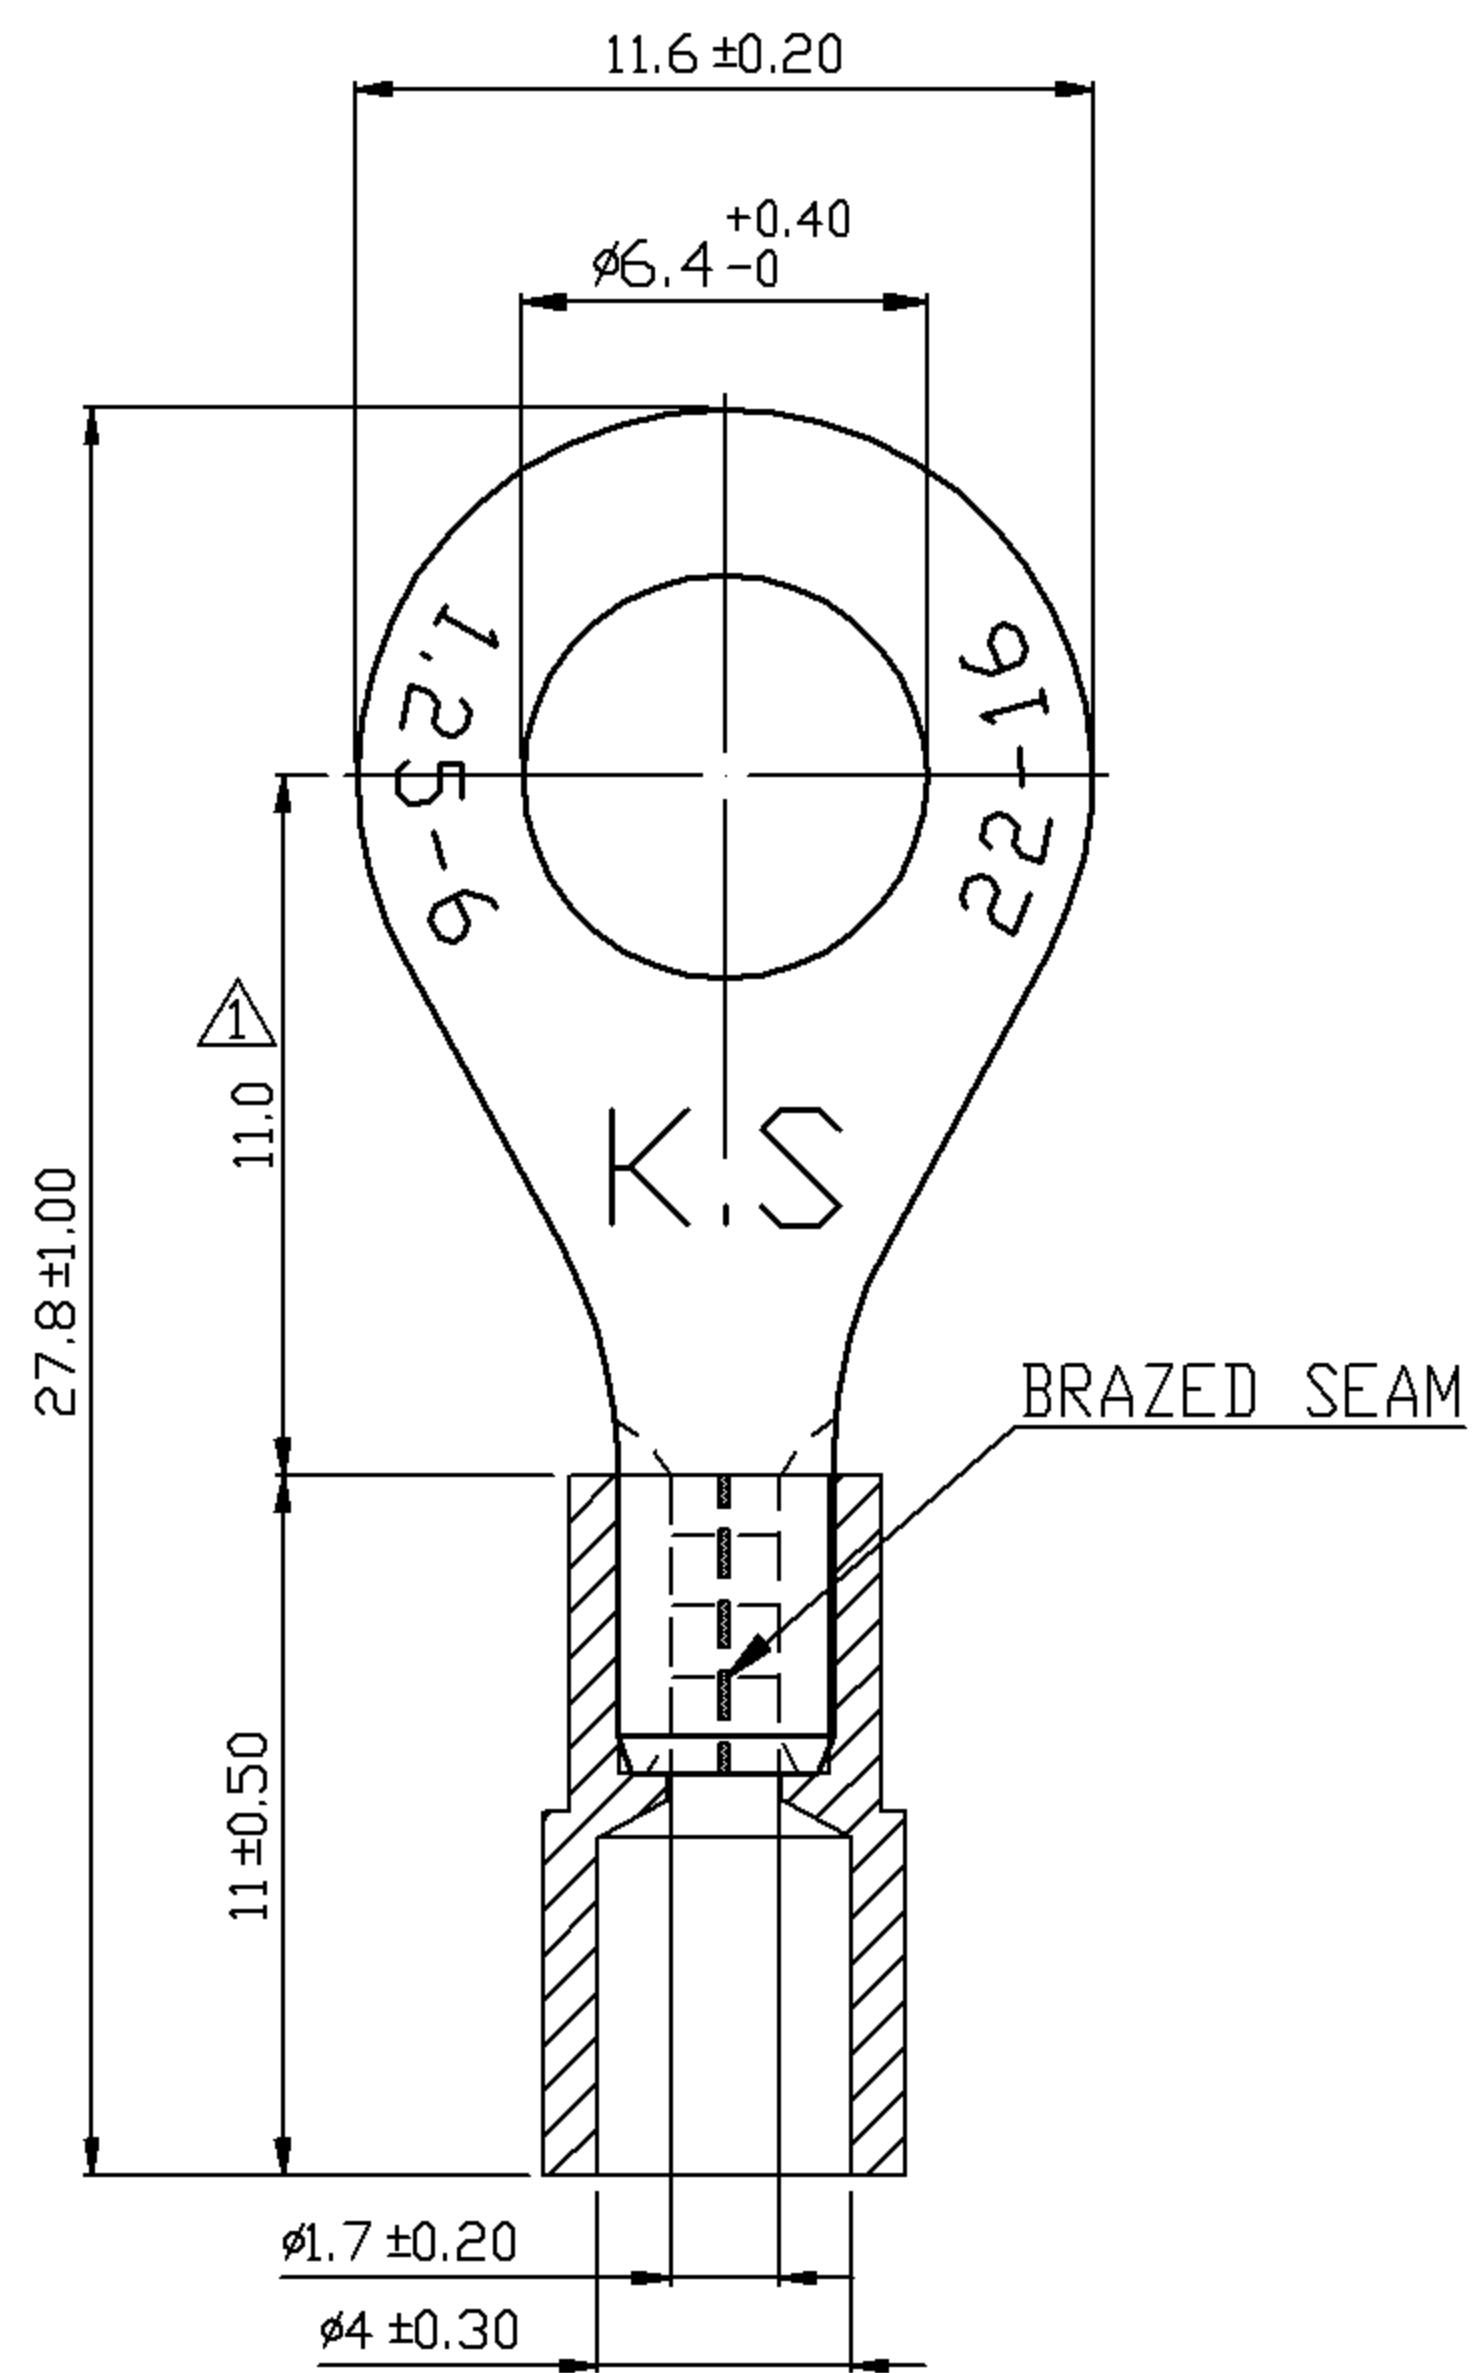


REV	DESCRIPTION	DATE
△	RDK-97127	謝婉如 2009/09/18
△	RDK-98020	謝婉如 2009/09/18

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	9	12	17	18
2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
3. INSULATION MATERIAL : NYLON
4. INSULATION COLOR : RED
5. TERMINAL MATERIAL : COPPER
6. WIRE RANGE : 22-16 A.W.G. (0.5-1.5 mm²)
7. TERMINAL SURFACE TREATMENT : TIN PLATED
8. TERMINAL THICKNESS : 0.75 mm

△	Tolerance Unless Otherwise Specified		
0 >	mm ±	ANGLE	
>	mm ±	0° >	° REF ±
>	mm ±	° >	° ±
>	mm ±	° >	° ±

NAME	NYLON-INSULATED RING TERMINALS				UNIT	mm	
PART NO.	RNYB1-6	MATERIAL	-----		APPROVE		
NUMBER	KA-93098-C	SCALE	SHEET	PAGE	CHECKED		
DATE	2002/10/29	3/1	1-2	10F2	DRAWN	張馨尹	

KST. K.S. TERMINALS INC.