



LIGHTWEIGHT SOLVENT FREE LATEX GRIP GLOVE WITH RECYCLED POLYESTER LINER

Unique patterned latex grip glove with 90% rPET liner offering outstanding grip properties in dry and wet conditions.

FEATURES

- › Lightweight 90% rPET liner (90%) maintains a superthin 'feel' for improved dexterity, fit and comfort
- › Special suction cups pattern which leads to an excellent wet and dry grip
- › Solvent free latex coating which makes it more Eco friendly compared to a crinkle latex glove
- › 19g of CO₂ reduced vs an equivalent crinkle latex glove with Nylon liner.
- › Anatomically designed for high levels of comfort and tactile touch
- › Contact heat protection up to 100°C for a short period (15 sec max)
- › Elasticated wrist provides a secure fit
- › RCS (Recycled Claim Standard) certified
- › 1 pair = 1 PET bottle of 500ml recycled
- › 32g of CO₂ reduced vs virgin polyester alternative



SUITABLE FOR

Typical Industries

- Construction
- Engineering
- Logistics
- Municipal Services
- Transport

Suitable Applications

- Assembly
- Final Fix
- Light Engineering
- Precision Operations

CERTIFICATION

CAT II



EN 388:2016 + A1:2018




2131A

EN 407:2020



X1XXXX

ANSI/ISEA 105



See overleaf for explanation

**PRODUCTION INFORMATION**

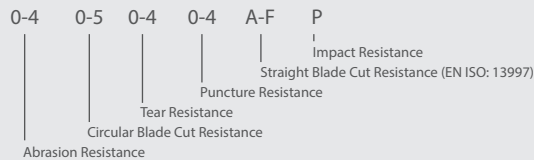
MATERIALS	LINER:	15 gauge 90% recycled polyester (rPET)
	COATING:	Natural Latex
COLOUR	Green	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

RECOMMENDATIONS FOR USE

- **USE:** General handling glove. Not suitable for high contact heat (beyond 100°C/212°F), thermal, electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use
- **WARNING:** Latex may cause allergies

ORDERING DETAILS

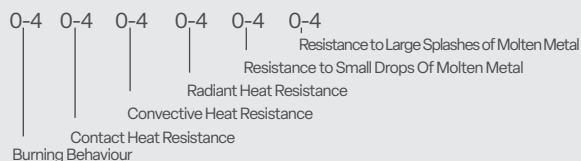
SIZE	CODE	PACKAGING
7/S	SKG00051ED	10 pairs per paper wrap
8/M	SKG00051EF	
9/L	SKG00051EH	
10/XL	SKG00051EJ	
11/XXL	SKG00051EL	120 pairs per case

CERTIFICATION LEGENDS**MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS***

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

**HEAT AND FIRE EN 407****PERFORMANCE LEVELS****ANSI/ISEA 105-2016 ABRASION RATING CHART**

Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

GLOBUS**EUROPE**www.globusgroup.com**E:** sales@globus.co.uk**T:** +44 (0)161 877 4747**F:** +44 (0)161 877 4746**MIDDLE EAST & AFRICA**www.globusgroup.com/gcc**E:** gcc@globusgroup.com**T:** +971 4 882 9962**F:** +971 4 882 9963**GLOBUS AMERICAS**www.globusgroup.com**E:** americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777)