



# S-TEX 581

## CUT PROTECTION, FINGERTIP PRECISION WITH OUTSTANDING OIL GRIP

Extremely lightweight, yet highly cut resistant, S-TEX 581 features a microporous foamed nitrile palm coating over a Hagane Coil® liner reinforced with Kevlar®. Incredibly supple and enhances grip in dry and light oily conditions.

### FEATURES

- › Cut resistant: Level E (EN 388:2016)
- › Lightweight, 13 gauge engineered Hagane Coil® liner with Kevlar®
- › Embossed microporous nitrile palm finish disperses oil away to increase grip and longevity in light oily environments
- › Microporous foam nitrile coating gives exceptional grip while allowing warm air and moisture from inside to escape, keeping your hands dry and comfortable
- › Foam nitrile coating provides an abrasion resistance level of 4
- › Ergonomic fit
- › Breathable back of hand to reduce perspiration
- › Designed for easy movement and continuous wear
- › Seamless knit prevents irritation
- › Suitable for contact heat resistance up to 250°C (approx. 15 seconds)



SHOWA HAGANE  
COIL® TECHNOLOGY



VENDING  
MACHINE  
COMPATIBLE



### SUITABLE FOR

#### Typical Industries

- Automotive
- Construction
- Glass
- Masonry
- Steel and Metals

#### Suitable Applications

- Assembly
- Bottling
- General Maintenance
- Handling Components with Sharp Edges
- Metal Fabrication
- Metallurgy
- Stamping

### CERTIFICATION

CAT II



EN 388:2016



4X42E

See overleaf for explanation



# S-TEX 581

## PRODUCT INFORMATION

MATERIALS	LINER:	13 gauge Hagane Coil® (Stainless steel/ polyester) reinforced with Kevlar®
	COATING:	Foam nitrile
COLOUR	Grey/black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

## ORDERING DETAILS

SIZE	CODE	PACKAGING
6/S	SHOS5811	10 pairs per bag 120 pairs per case
7/M	SHOS5812	
8/L	SHOS5813	
9/XL	SHOS5814	
10/XXL	SHOS5815	


## RECOMMENDATIONS FOR USE

- **USE:** Cut resistant glove. Not suitable for thermal, electrical and Chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

## CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016  
PERFORMANCE LEVELS\*

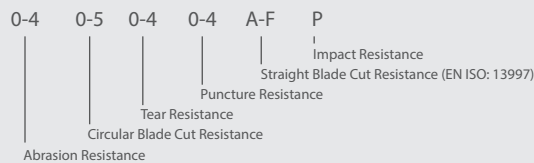

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

### EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

### MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2020 Globus (Shetland) Ltd | SHO-DATA-S-TEC 581\_0620\_1