

## UNCOATED, CUT LEVEL D GLOVE

Uncoated spandex/engineered cut resistant liner reinforced with HPPE.

### FEATURES

- › Cut resistant: Level D (EN 388:2016)
- › Lightweight, 15 gauge seamless knit spandex liner with HPPE
- › Contact heat level 1
- › Food handling approved
- › Lightweight, supple liner with breathable open back design
- › Cooling and breathable HPPE properties reduce perspiration and keep hands dry
- › Designed for use in high cut risk areas such as food processing & food service industries
- › Ambidextrous and launderable for multiple use, less waste and cost reduction
- › Perforated tag can be removed easily without tearing or damaging the glove
- › An ideal inner glove for extra cut protection



### SUITABLE FOR





#### Typical Industries

- Automotive
- Construction
- Food
- Glass
- Mechanical

#### Suitable Applications

- Fruit and vegetable processing
- Poultry, meat & seafood processing
- Glass & window handling
- Intricate parts handling
- Mounting & dismantling

### CERTIFICATION

CAT II	EN 388:2016	EN 407:2004	
			
	1X41D	X1XXXX	

See overleaf for explanation

## PRODUCT INFORMATION

MATERIALS	LINER:	13 gauge HPPE, engineered cut resistant fibres, spandex
	COATING:	Uncoated
COLOUR	Grey	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

## ORDERING DETAILS

SIZE	CODE	PACKAGING
6/S	SHO234X1	6 pairs (12 single gloves) per case
7/M	SHO234X2	
8/L	SHO234X3	
9/XL	SHO234X4	
10/XXL	SHO234X5	

## RECOMMENDATIONS FOR USE

- **USE:** Cut resistant glove. Not suitable for thermal, electrical, chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

## CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\*




\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



HEAT AND FIRE EN 407

PERFORMANCE LEVELS

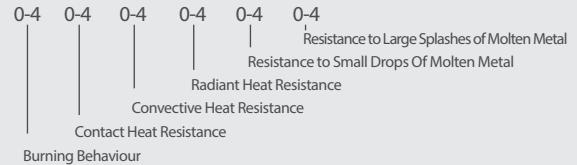

FOOD CONTACT DIRECTIVE EC 10/2011

### EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

**E:** sales@globus.co.uk  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

### MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** gcc@globusgroup.com  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963

