



541

FLEXIBLE, LIGHTWEIGHT PALM-COATED PU GLOVE WITH CUT RESISTANCE

Supple and light, the 541 provides a high degree of comfort when performing delicate tasks in dry and greasy handling condition where the risk of cuts is important.

FEATURES

- › Cut resistance: Level B (EN 388:2016)
- › A flexible, light glove providing effective protection against cuts and very resistant to abrasion
- › Protects the hand from oils and abrasion while remaining elastic and breathable
- › Breathable back of hand to reduce perspiration
- › Minimal allergy risks
- › Designed for easy movement and continuous wear
- › No irritation by seams in contact with the skin



SUITABLE FOR

Typical Industries

- Automotive
- Construction
- Electronics
- Manufacturing
- Metal Industry

Suitable Applications

- Bodywork
- Electrical Appliance Assembly
- Precision Mechanics
- Stamping

CERTIFICATION

CAT II



EN 388:2016



4342B

See overleaf for explanation



PRODUCT INFORMATION

MATERIALS	LINER:	13 gauge HPPE
	COATING:	Polyurethane
COLOUR	Grey/grey	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/S	SHO5411	10 pairs per bag 200 pairs per case
7/M	SHO5412	
8/L	SHO5413	
9/XL	SHO5414	
10/XXL	SHO5415	


RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016
PERFORMANCE LEVELS*

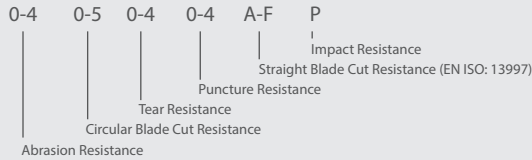

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963

